

# AR664SC



Sample image

**Order symbol:** AR664SC

**Product nbr:** 8561001

**Description:** PC Enclosure


**Remarks:** Opaque screw cover

**EAN:** 6418074066275

**El. number:**

- Finland:
- Denmark:
- Sweden:

**Including:** Screw cover. Base with 10-32 brass inserts, cover with formed in place PUR gasket and 4 stainless cover screws. Enclosure mounting foot kit. Accessory 10-32 screws for panel mounting.

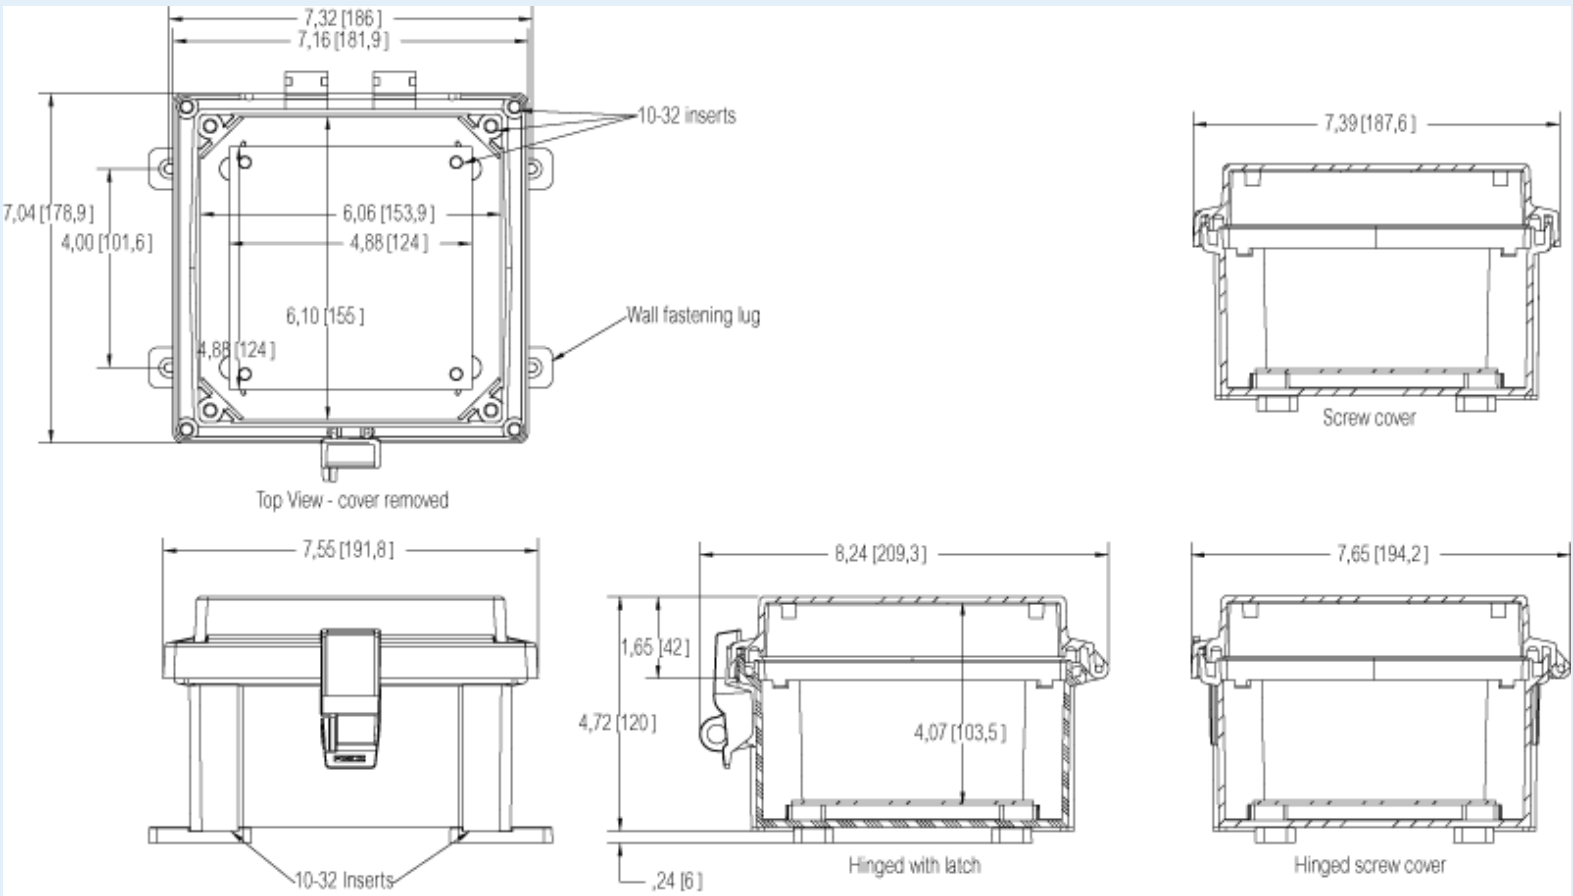

| Dimensions: | Height | Width | Depth |
|-------------|--------|-------|-------|
| mm:         | 152    | 152   | 102   |
| inch:       | 6      | 6     | 4     |

| Accessories: |                          |
|--------------|--------------------------|
| AMFL6        | 6" Mounting Flange Set   |
| ABP66        | Painted Steel Back Panel |

**Materials:**

|                  |                      |
|------------------|----------------------|
| Material:        | Polycarbonate        |
| Base colour:     | RAL 7035 -light grey |
| Cover colour:    | RAL 7035 -light grey |
| Gasket material: | Polyurethane         |

**Temperatures:**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (short term):: | -40 ... 140 |
| Temperature °C (continuous):  | -40 ... 80  |
| Temperature °F (short term):  | -40 ... 250 |
| Temperature °F (continuous):  | -40 ... 175 |

(124 x 124)

|        |                                               |
|--------|-----------------------------------------------|
| ASPHK6 | Swing Panel Kit w/o Panel                     |
| ASPK66 | Swing Panel Kit incl. Panel                   |
| ALBP66 | Aluminum Back Panel<br>(124 x 124)            |
| APBP66 | PVC Back Panel<br>(124 x 124)                 |
| ASP66  | Aluminum Swing Panel<br>(153 x 154 x 0)       |
| ADFP66 | Dead Front Panel w/ screws<br>(155 x 157 x 0) |

**Rating:**

|                                        |                                   |
|----------------------------------------|-----------------------------------|
| Ingress protection (EN 60529):         | IP66; IP67;                       |
| Impact Resistance (EN 62262):          | IK09;                             |
| Electrical insulation:                 | Not insulated                     |
| Halogen free (DIN/VDE 0472, Part 815): | 1                                 |
| UV resistance:                         | UL 508                            |
| Flammability Rating:                   | UL 508                            |
| Glow Wire Test (IEC 695-2-1) °C:       | 960 °C                            |
| NEMA Class                             | NEMA 4, 4X, 6, 6P, 12, 12K and 13 |

**Certificates:**

ARCA\_CertificateofCompliance