


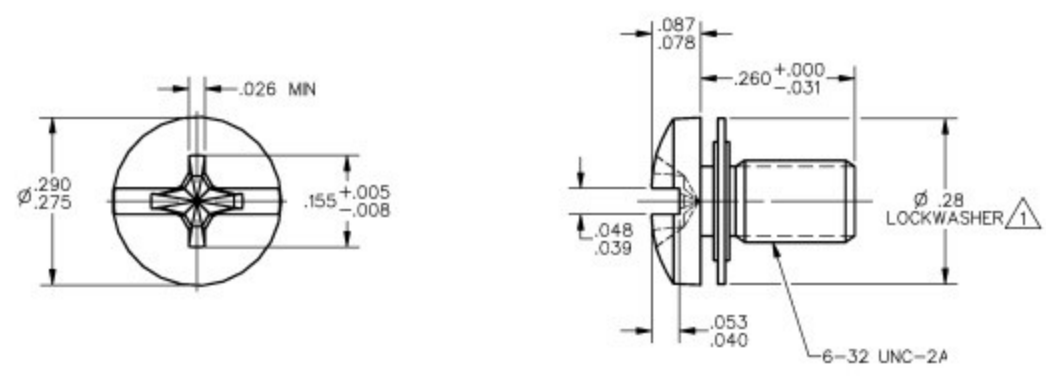

NOTES
1 LOCKWASHER: C51000 PHOSPHOR BRONZE / 96-00034
2 - EFFECTIVE THREAD LENGTH TO BE WITHIN .024 OF LOCKWASHER

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE: ☒ US INCH ☐ SI (MM) DM CUSTOMARY METRIC		DIMENSIONS ARE TO BE MET BEFORE PROTECTIVE COATINGS ARE APPLIED		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL'S MICRO SWITCH DIVISION. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF HONEYWELL.		C B A		SPK OCT04 KSR JUL04 CCR NOV 98			
		TITLE SCREW, ASSEMBLED WASHER, BINDING HEAD, COMBINATION		REVISION		REVISION NOTICE		CHANGED BY		CHECKED BY	
MATERIAL C26000 COPPER ZINC (BRASS) / 96-00020 (50)		CAD DRAWN 11 NOV 98		Honeywell		THIRD ANGLE PROJECTION		SCALE 5:1		DRAWING NUMBER 10-21737	
RASTER DESIGN CHECKED 11 NOV 98		MICRO SWITCH		DO NOT SCALE PRINT		ISSUE 10					