
Kontaktbuchse 3,6 mm
geschlitzt

Einsatzbereich:
- 940 Stecker
- 940 Winkelstecker
- 940 Durchführung
- 740 htec Stecker
- 740 htec Winkelstecker
- 740 htec Durchführung

TE Teile Nr.: 60-0312-011-000
IC Ref Nr.: 60.312.11



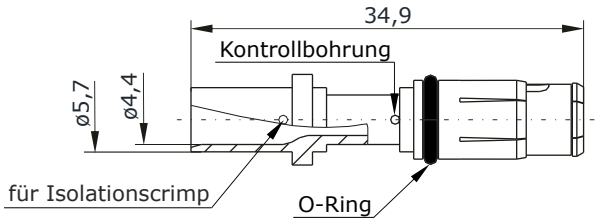

Hauptabmessungen
Kontaktbuchse

Elektrische Werte

Bemessungsstrom	max. 75 A*
Durchgangswiderstand	< 1 mOhm

Werkstoff

Kontakt	Messing, vergoldet
Dichtung	FKM

Anschluss

Anschlussart/-bereich	Crimp/ 1,5 - 10,0 mm²
- für Isolationscrimp	max. ø4,4 mm
Abisolierlänge	8 mm
Crimpeinstellungen	sind individuell zu wählen

Mechanische Werte

Steckzyklen	500

Werkzeuge (nicht im Lieferumfang enthalten)

analoge Crimpzange	TE Teile Nr.: C0-0008-000-000 IC Ref. Nr.: C0.008.00
Positioniereinsatz für 3,6 mm Kontakte	TE Teile Nr.: C0-0010-000-000 IC Ref. Nr.: C0.010.00

© 2021 TE Connectivity.

TE Connectivity, TE connectivity (logo), intercontec (logo) und speedtec sind Marken.

Auch wenn TE Connectivity (TE) bemüht ist, die Korrektheit der Informationen in diesem Beitrag sicherzustellen, übernimmt TE keinerlei Gewährleistung dafür, dass diese fehlerfrei, zutreffend, korrekt, verlässlich oder aktuell sind. TE behält sich das Recht vor, die in diesem Beitrag genannten Informationen jederzeit ohne Ankündigung zu ändern. TE weist ausdrücklich jegliche Gewährleistung hinsichtlich der in diesem Beitrag genannten Informationen zurück, einschließlich der implizierten Gewährleistung der Marktgängigkeit oder Eignung für bestimmte Zwecke. Die Maßangaben in diesem Beitrag dienen ausschließlich zu Referenzzwecken und Änderungen sind vorbehalten. Änderungen der Spezifikationen sind vorbehalten. Bitte fragen Sie TE nach den aktuellen Maßangaben und Designspezifikationen

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz

* Bei max. Anschlussquerschnitt


Y6-F309-000-0DE erstellt: 04.02.2015/CS; geändert: 11.03.2021/VK

Contact Socket 3.6 mm
slotted

for: - 940 Plug
- 940 Plug, Angled
- 940 Bulkhead Connector
- 740 htec Plug
- 740 htec Plug, Angled
- 740 htec Bulkhead Connector

TE part number: 60-0312-011-000
IC reference number: 60.312.11



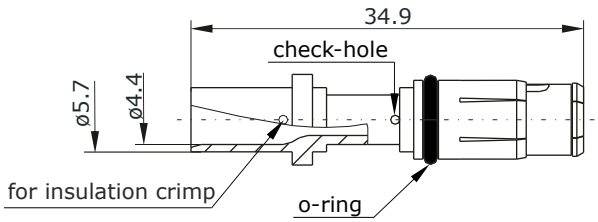

Main Dimensions
contact socket

Electrical data

rated current	max. 75 A*
contact resistance	< 1 mOhm

Material

contact	brass, gold plated
seal	FKM

Termination

cross section	crimp/ 1.5 - 10.0 mm²
- for insulation crimp	max. ø4.4 mm
stripping length	8 mm
crimp settings	select individually

Mechanical Data

mating cycles	500

Tools (not part of product contents)

analog crimping tool	TE part no.: C0-0008-000-000 IC ref. no.: C0.008.00
positioner for 3.6 mm contacts	TE part no.: C0-0010-000-000 IC ref. no.: C0.010.00

© 2021 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz

* for max. wire cross-section

Y6-F309-000-0EN issued: 04.02.2015/CS; modified: 11.03.2021/VK