



Views from "X"

6-Pole
(5+1)




8-Pole




Cable Diameter

7 - 12 mm

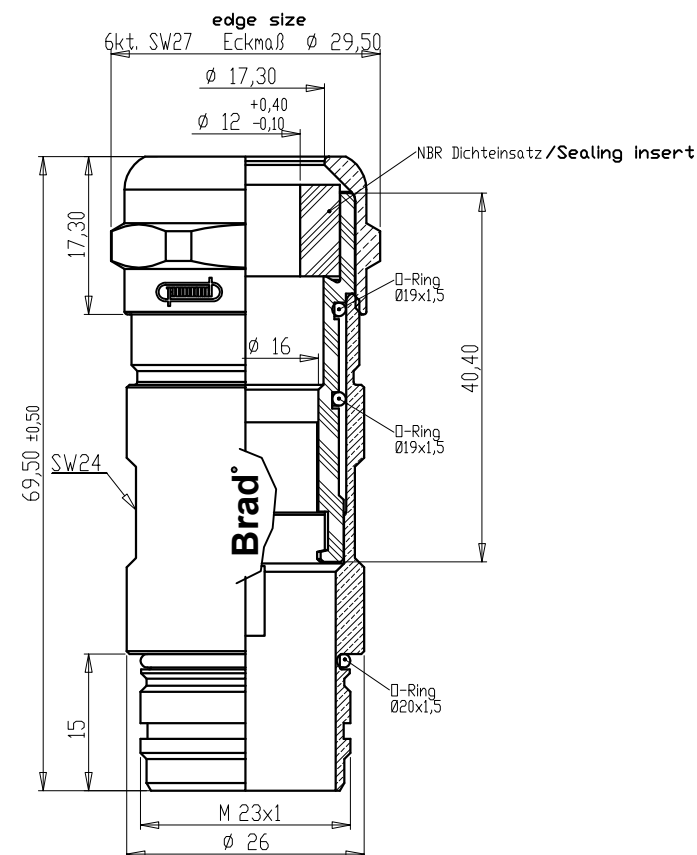

Cable Diameter

11 - 17 mm

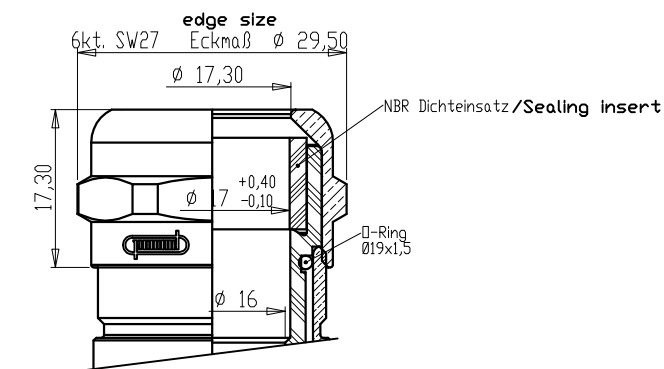

Cable Diameter		Crimp Contacts	Without Contacts
6 Pole (5+PE)	7 – 12mm	KAP6S06-105	KAP6S06-005
		1202330017	1202330019
	11 – 17mm	KAP6S06-109	KAP6S06-009
		1202330018	1202330020
	Crimp range*	0,75-2,5mm²	
8 Pole	7 – 12mm	KAP8S06-115	KAP8S06-005
		1202330021	1202330023
	11 – 17mm	KAP8S06-119	KAP8S06-009
		1202330022	1202330024
	Crimp range*	0,25-1,0mm²/0,75-2,5mm²	

Notes:

Tolerances (unless specified): DIN ISO 2768 m

*Crimp range only applies to "Crimp Contacts" version

DESCRIPTION EC NO: WEU2009-0135 DRWN: BBRAUCH 2008/11/19 CHKD: ---- APPR: JKOLB 2009/03/02		QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM		SCALE ---	DESIGN UNITS METRIC	 FIRST ANGLE PROJECTION	
				mm	INCH	DRAWN BY DATE		M23 FIELD-ATTACHABLE CABLE CONNECTOR MALE STRAIGHT			
			4 PLACES	± ----	± ----	BB 2008/11/19					
			3 PLACES	± ----	± ----	CHECKED BY DATE					
			2 PLACES	±0.05	± ----	JKO 2008/12/09					
1		REV	1 PLACE	±0.1	± ----	APPROVED BY DATE		 MOLEX INCORPORATED			
			ANGULAR ± --- °			-----					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. see table		DOCUMENT NO. SD-120233-003			SHEET NO. 1 OF 1
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				