

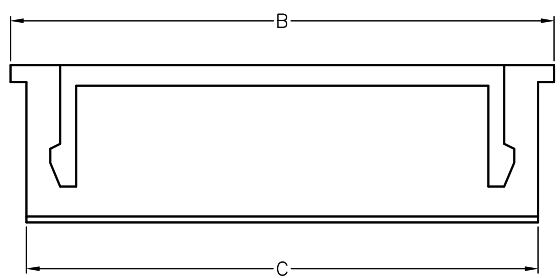
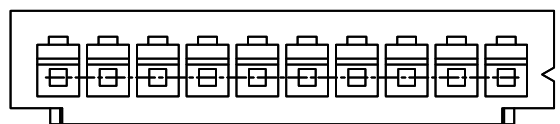


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/06	
A		PART REVISION	4/19/06	
B		ADDED DIM.	3/18/15	AY/RT
C		UPDATE DRAWING	4/13/18	AY/MY

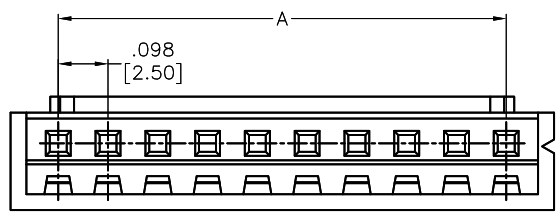

SPECIFICATIONS:
 Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Electrical:
 Rated Voltage: 250V AC/DC
 Rated Current: 3A AC/DC
 Contact Resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Withstand voltage: 1000V AC for 1 minute.
 Temperature Rating:
 -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant

Positions: 2 thru 20
 A = .098 [2.50] x No. of Spaces
 B = .098 [2.50] x No. of Positions + .091 [2.30]
 C = .098 [2.50] x No. of Positions + .028 [0.70]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	LFJ	4/13/06		WIRE TO BOARD PITCH: 2.5MM CRIMP HOUSING STRAIGHT TYPE	
CHECKED				SIZE X	PART NO. 25CH-B-XX
APPROVED				REV. C	
REF: S00124T		SCALE: NTS		SHEET 1 OF 1	