

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/13	
A		REVISED SHAPE.	7/24/13	
B		REVISED DIM.	2/17/14	AY/MY
C		REVISED SPEC.	2/24/20	AY/KL

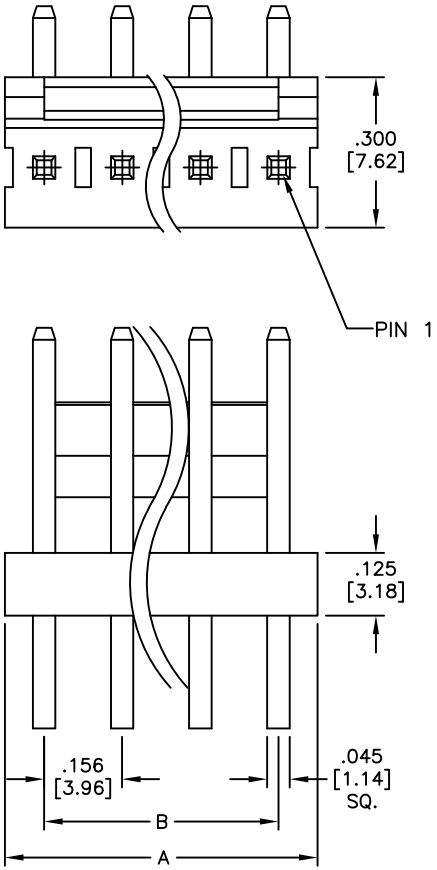

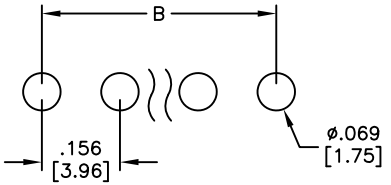

RECOMMENDED PCB LAYOUT

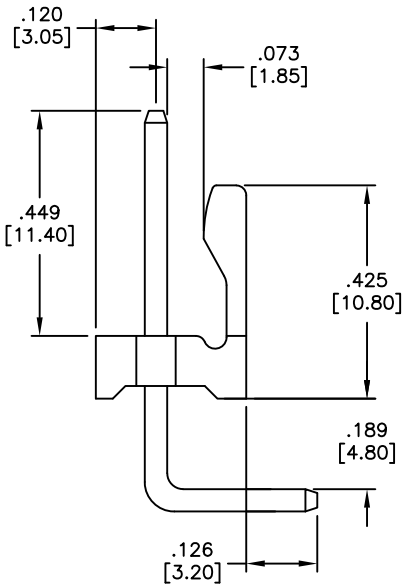

SPECIFICATIONS:
Material:
Insulator: Ny66, rated UL 94V-0
Insulator color: White
contact: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 7.0 Amp
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC/DC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 20
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/23/13
CHECKED	LW	7/23/13
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] HEADER, REVERSE RIGHT ANGLE

SIZE	PART NO.	REV.
X	LHD-XX-TRB-V0	C

REF:	SCALE:	SHEET
S00019C	NTS	1 OF 1