



Order Code	L1 (mm)	W (mm)	ØD (mm)	ØID closed (mm)
500 911 500	8.5 ± 0.3	9.9 ± 0.3	4.4 ± 0.3	3.0 ± 0.3
500 914 000	10.5 ± 0.3	9.5 ± 0.3	5.0 ± 0.3	7.6 ± 0.3
500 914 500	12.0 ± 0.3	9.5 ± 0.3	3.2 ± 0.3	8.3 ± 0.3
500 915 000	12.4 ± 0.3	9.5 ± 0.3	4.8 ± 0.3	9.0 ± 0.3
500 916 000	14.8 ± 0.3	12.5 ± 0.3	4.9 ± 0.3	11.5 ± 0.3



sectional drawing A-A

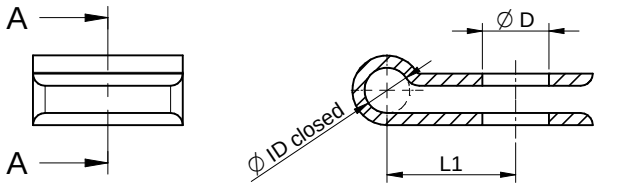





Scale - 2:1

Operating Temperatur: -30°C up to +85°C

REV.	FILE	DATE	BY

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions

Max-Eyth-Str. 1
74638 Waldenburg
Germany
com. +49 79 42 945 - 0

www.we-online.de
eiSos@we-online.de

CREATED	CHECKED	GENERAL TOLERANCE	PROJECTION METHOD	SIZE
DaF	SKl	DIN ISO 2768-1m		A4

DESCRIPTION	TECHNICAL REFERENCE	MATERIAL
AsCHCL **Cable Clip**	_____	Nylon 66, natural

ORDER CODE: 500 91x x00

SIZE	WEIGHT	STATUS	DATE	BUSINESS UNIT	PAGE
xxx xxx xxx		Released	2016-09-01	eiCan	1 /1

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.