




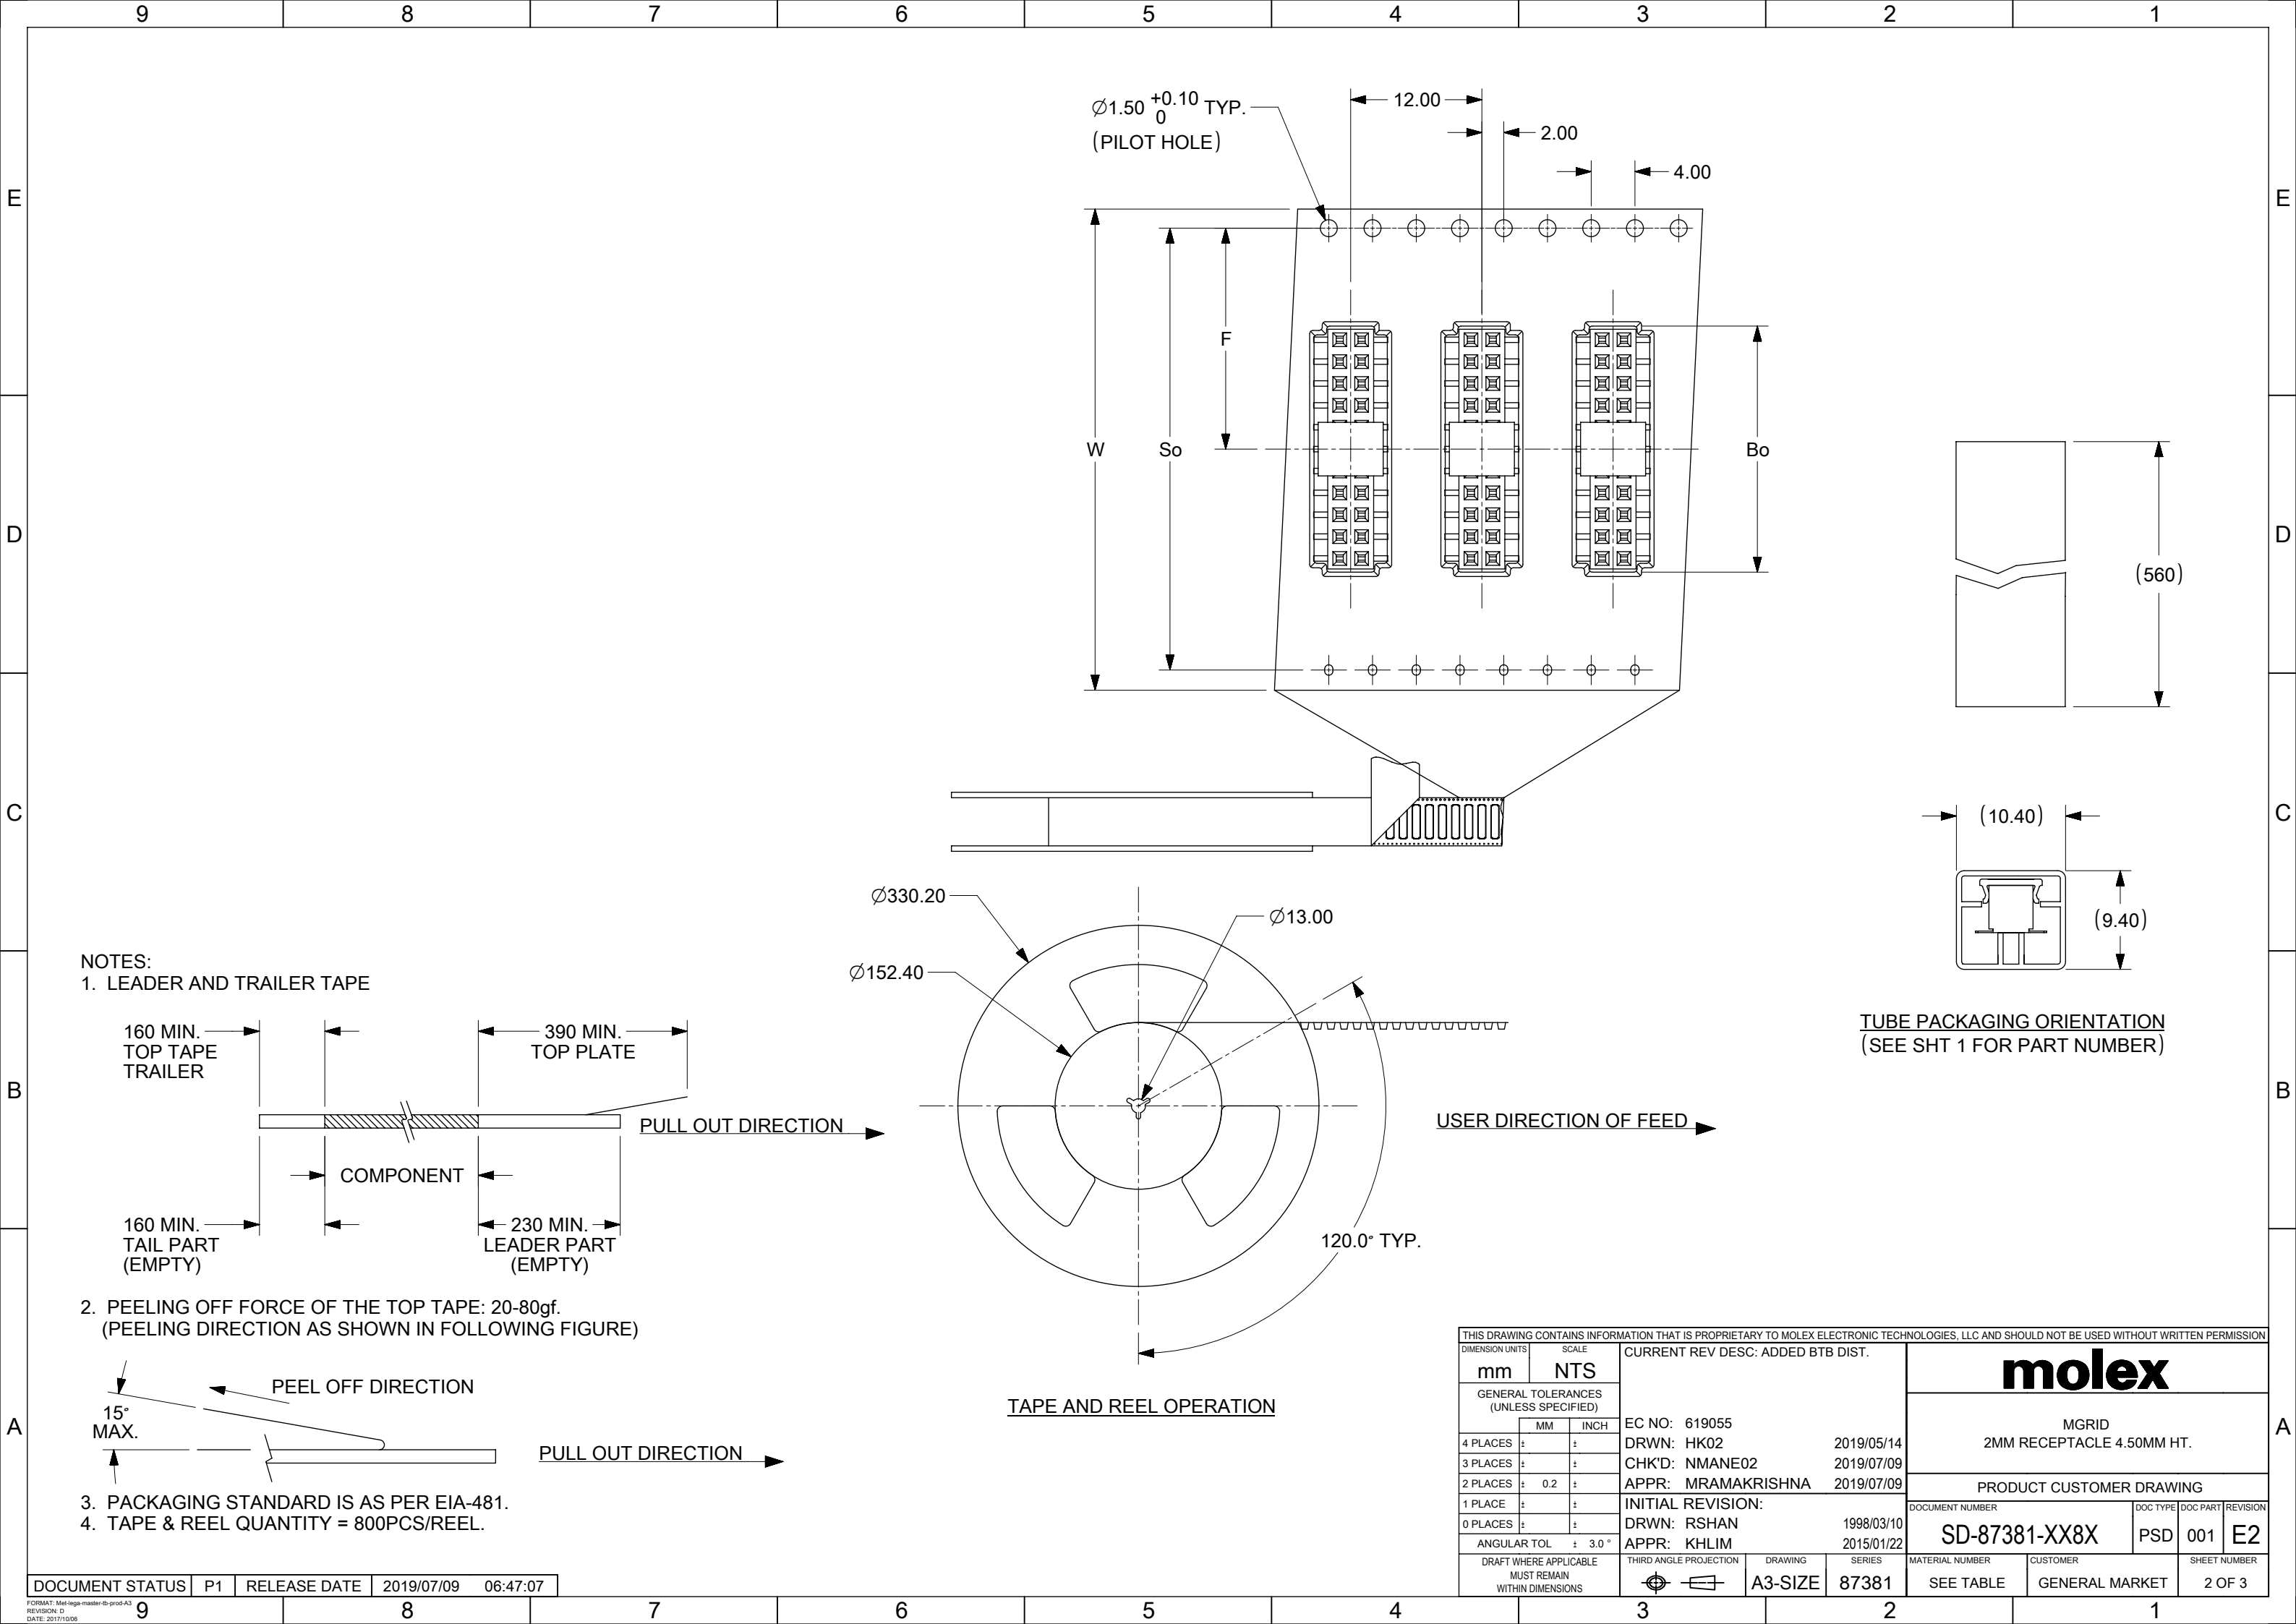

NOTES:
1. LEADER AND TRAILER TAPE

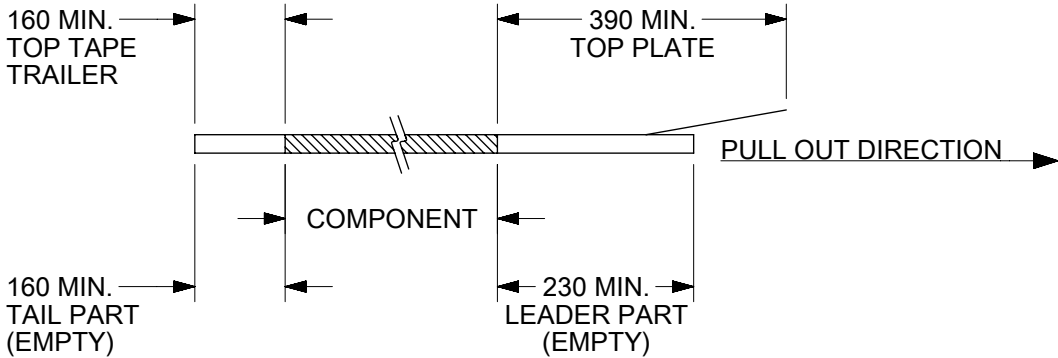


2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)

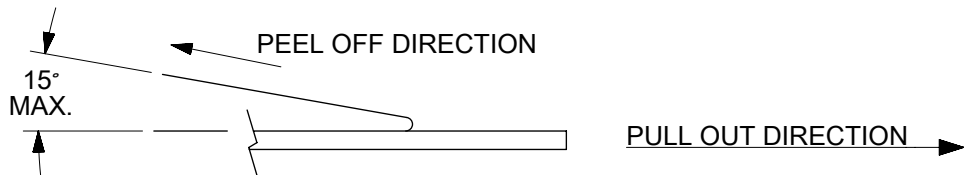

3. PACKAGING STANDARD IS AS PER EIA-481.
4. TAPE & REEL QUANTITY = 800PCS/REEL.

DOCUMENT STATUS	P1	RELEASE DATE	2019/07/09	06:47:07
-----------------	----	--------------	------------	----------

FORMAT: Mef-lega-master-ib-prod-A3
REVISION: D
DATE: 2017/10/08

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: ADDED BTB DIST.				molex	
mm		NTS							
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 619055				MGRID 2MM RECEPTACLE 4.50MM HT.	
4 PLACES		±	MM	±	INCH	DRWN: HK02		2019/05/14	
3 PLACES		±		±		CHK'D: NMANE02		2019/07/09	
2 PLACES		±	0.2	±		APPR: MRAMAKRISHNA		2019/07/09	
1 PLACE		±		±		INITIAL REVISION:			
0 PLACES		±		±					
ANGULAR TOL ± 3.0 °				THIRD ANGLE PROJECTION		DRAWING		SERIES	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						A3-SIZE		87381	
						MATERIAL NUMBER		CUSTOMER	
						SEE TABLE		GENERAL MARKET	
								SHEET NUMBER	
								2 OF 3	

