


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/30/21	


APPROVED: _____


DATE: _____ TITLE: _____

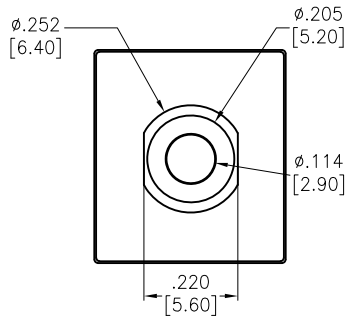

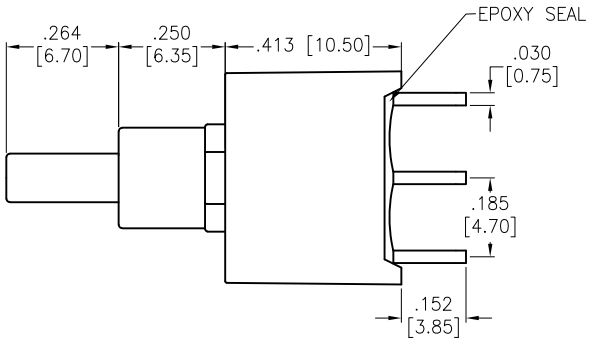

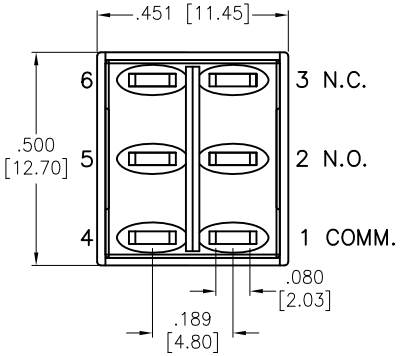

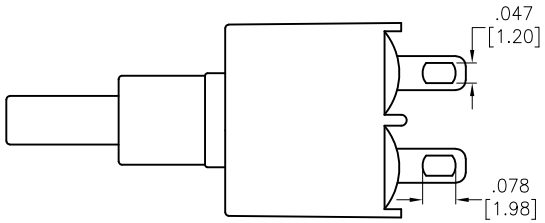



CIRCUIT DIAGRAM
(DPDT) ON–MOMENTARY

SPECIFICATIONS:
Material:
Movable Contact: Copper Alloy, Silver Plated
Terminal: Copper Alloy, Silver Plated with outer layer in gold plating
Electrical:
Voltage rating: 120VAC or 38VDC
Current rating: 1 Amps
Contact resistance: 10 mΩ max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500V RMS @Sea level
Mechanical:
Waterproof: IP68
Temperature Rating:
Operating temperature: –30°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	JJ	9/30/21
CHECKED	RC	9/30/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
PUSHBUTTON SWITCH, ON-MOMENTARY, DPDT
GOLD OVER SILVER PLATED, SOLDER TYPE, IP68

SIZE	PART NO.	REV.
X	SW-PB8-BA00B1GE-2D	-

REF:	SCALE:	SHEET
S00198T	NTS	1 OF 1