





<Example>

nichicon
33 μ F 400V

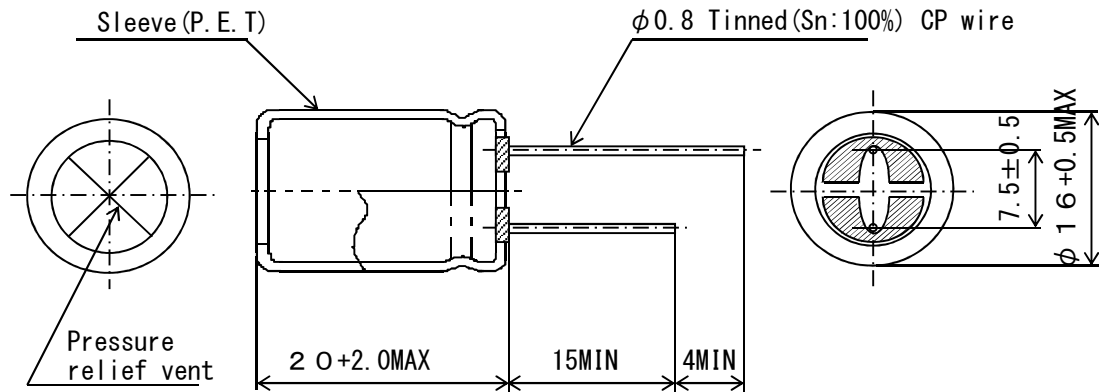

AS (M)
105°C
Lot. No.



CONNECTION DIAGRAM

Sleeve color:Dark Brown
Marking color:White

ELECTRICAL CHARACTERISTICS

WORKING VOLTAGE (V. D. C)	SURGE VOLTAGE (V. D. C)	RATED CAP (μ F)	CAP. TOL. (%)	$\tan \delta$ (MAX)	LEAKAGE CURRENT (μ A MAX)	RIPPLE CURRENT (mArms MAX)	
400	450	33	±20	0.15	628	225	
				at 120Hz 20 °C	400 V 20°C after 1min	at 120Hz 105°C	

TEST STANDARD

JIS C 5101-4

OPERATING TEMP. RANGE

-40 ~ 105°C

				NICHICON TYPE NO.			
				UAS2G330MHD			
				RATE			
				400V		33 μ F	
				3RD ANGLE PROJEC- TION	SCALE /mm	DATE 2015/11/18	CASE SIZE ϕ 16 × 20 L
MARK	DATE	DESCRIPTIONS	APPR.	REVISION :			
SPECIFICATION				DWG. No.	H151119h1		sheet 2