Views from "X"

6-Pole
(5+1)



8-Pole



Cable Diameter

7 - 12 mm

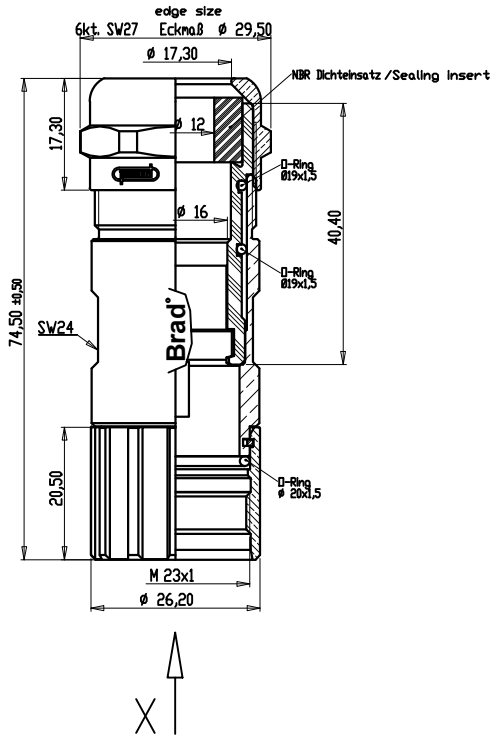

Cable Diameter

11 - 17 mm

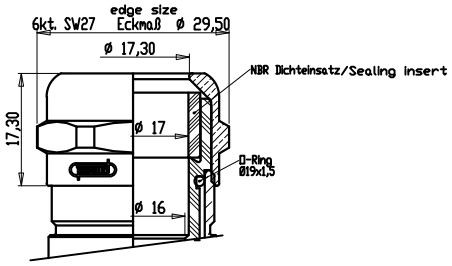

	Cable Diameter	Crimp Contacts	Without Contacts
6 Pole (5+PE)	7 – 12mm	KAP6S00-105	KAP6S00-005
		1202330001	1202330003
	11 – 17mm	KAP6S00-109	KAP6S00-009
		1202330002	1202330004
	Crimp range*	0,75-2,5mm²	
8 Pole	7 – 12mm	KAP8S00-115	KAP8S00-005
		1202330005	1202330007
	11 – 17mm	KAP8S00-119	KAP8S00-009
		1202330006	1202330008
	Crimp range*	0,25-1,0mm²/0,75-2,5mm²	

*Crimp range only applies to "Crimp Contacts" version

Notes:

Tolerances (unless specified): DIN ISO 2768 m

DESCRIPTION
EC NO: IPG2015-0907 2014/11/18
DRWN: BBRAUCH 2014/11/19
CHKD: ZISMAYIL ----
APPR: CBURGER
DESCRIPTION
2
REV

QUALITY SYMBOLS
▽ = 0
Ⓒ ▽ = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±---
2 PLACES	±0.05	±---
1 PLACE	±0.1	±---
0 PLACE	±---	±---

ANGULAR ± --- °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: BB DATE: 2008/11/18
CHECKED BY: JKO DATE: 2008/12/09
APPROVED BY: ---- DATE: ----

FA M23 XP FE STR

----

molex

MATERIAL NO.: see table
DOCUMENT NO.: SD-120233-001
SHEET NO.: 1 OF 1
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION