
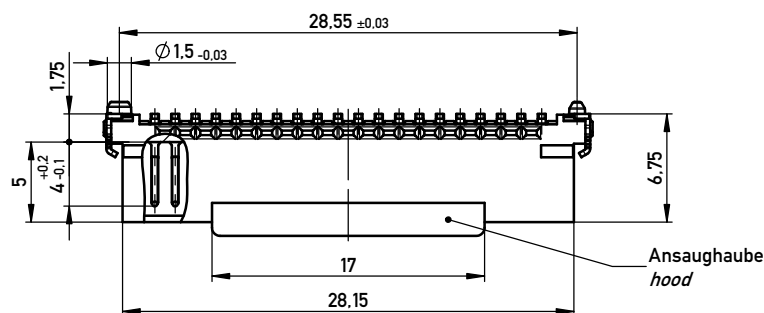
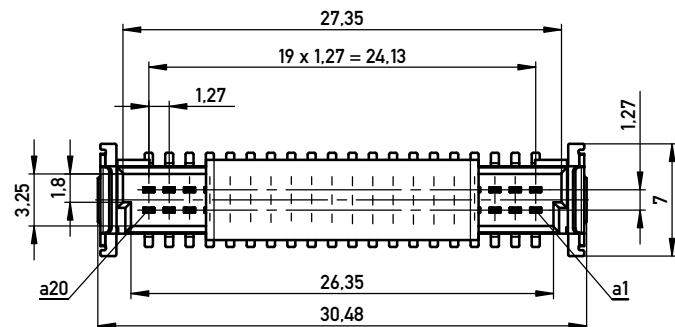


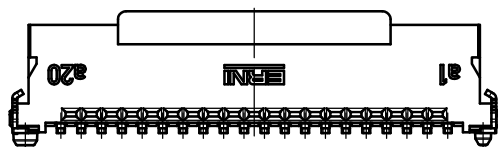


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm


Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 280 Stück
Packaging unit: 280 pcs



Abspulrichtung - Reel off Direction

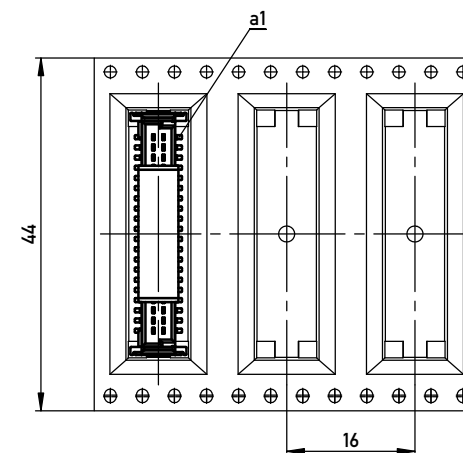

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

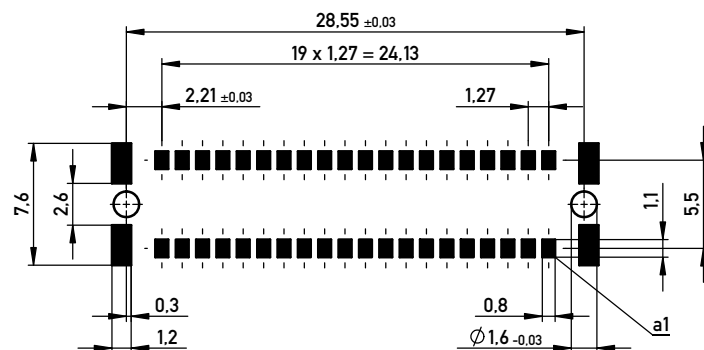

BA 8-13 - 8mm Bauhöhe
type 8-13 - Low Profile

Information:		Tolerances	Scale 3:1	Designation	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.	All Dimensions in mm	Messerl. SMC-Q 40-SMD-BA8-13 Male SMC-Q 40-SMD-type8-13	
e	14.07.2015	ERNI	www.ERNI.com	254590	I
Index	Date			Class	A3
				SMCQ	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.