

Han C-Contact Female with pin

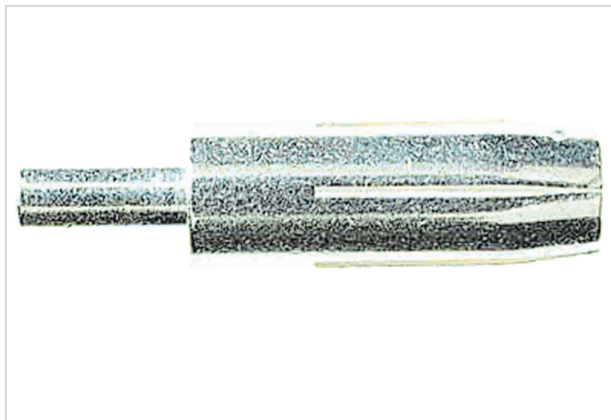


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|---|
| Part number | 09 32 000 6295 |
| Specification | Han C-Contact Female with pin |
| HARTING eCatalogue | https://b2b.harting.com/09320006295 |

Identification

| | |
|-----------------|--------------------|
| Category | Contacts |
| Series | Han [®] C |
| Type of contact | PCB contact |

Version

| | |
|-----------------------|-----------------|
| Gender | Male |
| Manufacturing process | Turned contacts |

Technical characteristics

| | |
|--------------------|-------|
| Operating current | ≤40 A |
| Contact resistance | ≤3 mΩ |

Material properties

| | |
|-----------------------------|--|
| Material (contacts) | Copper alloy |
| Surface (contacts) | Silver plated |
| RoHS | compliant with exemption |
| RoHS exemptions | 6(c): Copper alloy containing up to 4 % lead by weight |
| ELV status | compliant with exemption |
| China RoHS | 50 |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Yes |
| REACH SVHC substances | Lead |



Pushing Performance
Since 1945

Material properties

| | |
|--------------------------------------|--------------------------------------|
| ECHA SCIP number | b51e5b97-eeb5-438b-8538-f1771d43c17d |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Lead Nickel |

Specifications and approvals

| | |
|----------------|-------------------------|
| Specifications | EN 60664-1 IEC 61984 |
|----------------|-------------------------|

Commercial data

| | |
|--------------------------------|--|
| Packaging size | 25 |
| Net weight | 2.51 g |
| Country of origin | Germany |
| European customs tariff number | 85366990 |
| GTIN | 5713140049116 |
| eCl@ss | 27440204 Contact for industrial connectors |