

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/05/08	
A		ADDED SPEC.	7/25/11	

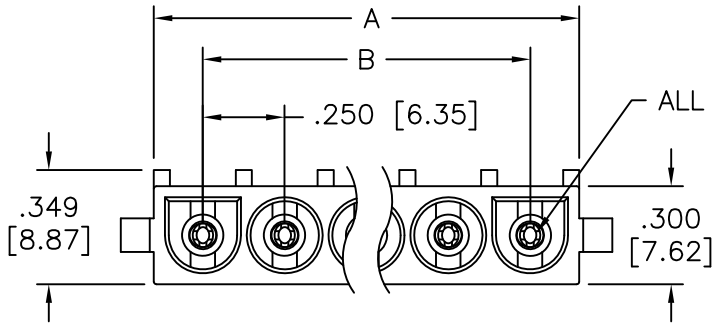

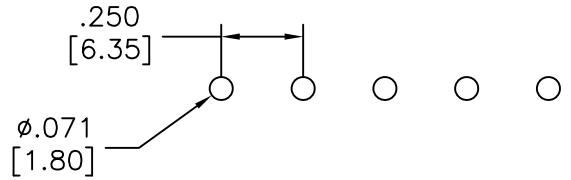

Recommended PCB Layout

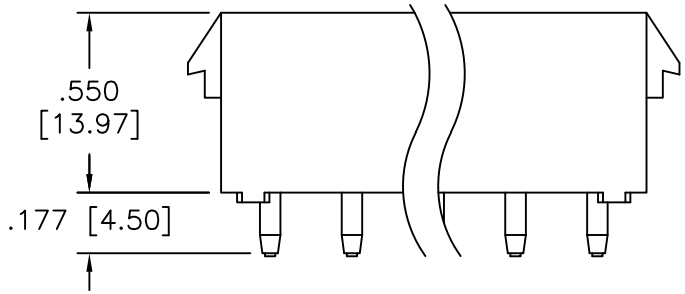



SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V–0
Insulator color: White
Contacts: Brass, Tin plated
Electrical:
Voltage rating: 600 V
Current rating: 2~4P: 13A, 6~10P: 11A
Dielectric withstanding voltage: 5000 VAC for 1 minute
Temperature Rating:
–55°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Poles: 02 thru 10
A = .250 [6.35] X No. of Positions + .050 [1.27]
B = .250 [6.35] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	9/05/08
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO BOARD, FEMALE, 6.35mm PITCH WITHOUT POLARIZING, SINGLE ROW TYPE

SIZE	PART NO.	REV.
X	DME-XX-S-S-V0	A

REF:	SCALE:	SHEET
S000123T	NTS	1 OF 1