



REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Victory	2019/08/23



Recommended Panel Cut-out

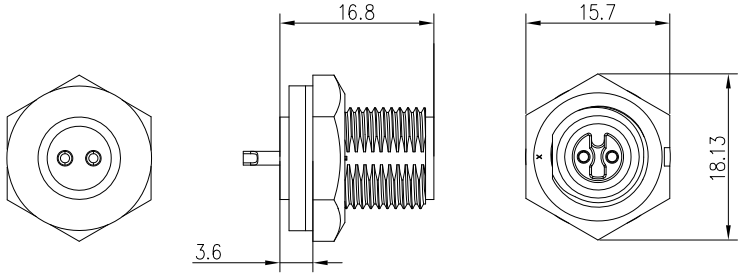


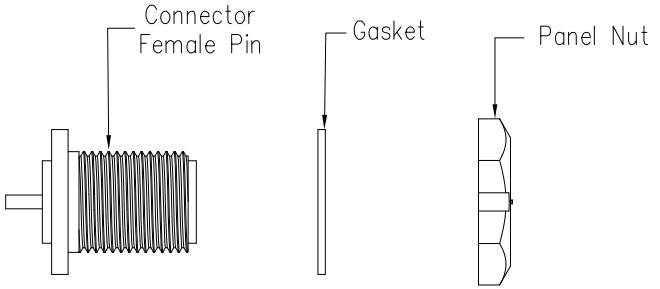




21XXX615-01

Pin Number

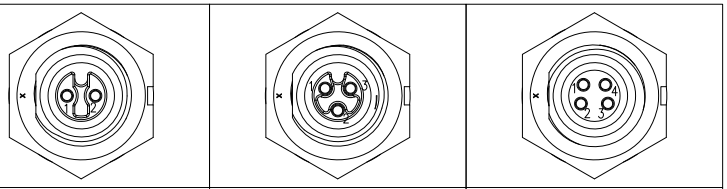

2 Pin	3 Pin	4 Pin
P/N: 21002615-01	P/N: 21003615-01	P/N: 21004615-01

Pin Assignments Front View



Specification:
1.Operation Temperature: -45℃~105℃.
2.Insulation Resistance: 100MΩ at DC 500V.
3.Contact Resistance: <10mΩ .
4.Withstand Voltage: 1500V AC.
5.Operating Current: 5A.
6.Operating Voltage: AC 110V.
7.Waterproof Rate: IP67(Mated).
8.Connector: Nylon+GF, Black.
9.Panel Nut: Nylon, Black.
10.Gasket: Silicon, Gray.
11.Female Pin: Copper Alloy,Gold Plated.
12.Torque Rate: 0.5~0.7N • m.
13.RoHS Compliant.
14.UL Compliant.
15.Mating Cap P/N: 806-00028-00

UNIT: mm	DESCRIPTION: Mini Series Screw Type Front Mount With Female Pin	CHOGORI®	PART NO: 21XXX615-01	DRAWN BY: Victory	DATE: 2019/08/23
TOLERANCE: .X ±0.25, .XX ±0.15, .XXX ±0.05, ANGLES ±1°	SCALE: 4:5		DWG NO	CHECKED BY: Ivan	DATE: 2019/08/23
	SHEET: 1 OF 1		CUSTOMER	APPROVED BY: Panson	DATE: 2019/08/23
	REV: C1 / SIZE: A4	∗ : Inspection Item			

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.