

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	128 mOhms max.
INDUCTANCE	1-4 1kHz, 100mVAC, Ls	696.0uH ±10%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

CURRENT RATING: 2A

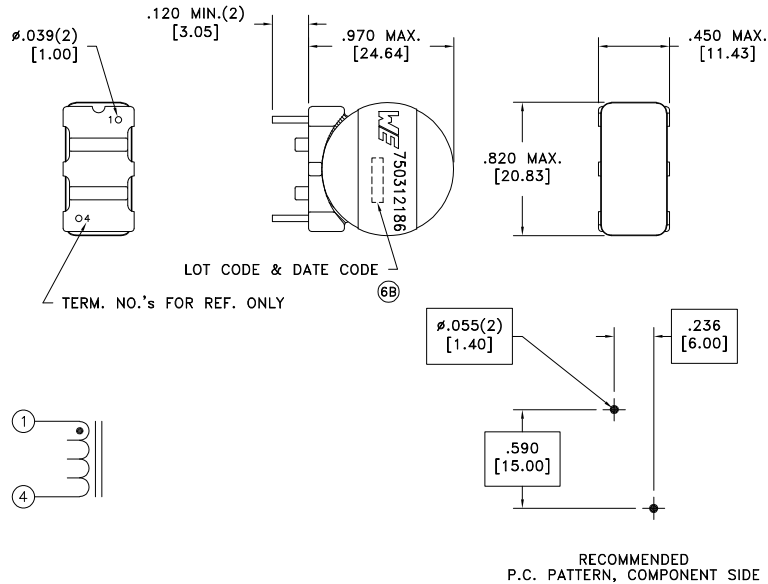

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	<p>CONVENTION PLACEMENT</p>	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03]	DRAWING TITLE	PART NO.	
6D	3/21	Method: Tray		<p>This drawing is dual dimensioned. Dimensions in brackets are in millimeters.</p>	<p>INDUCTOR</p>	<p>750312186</p>	
6C	6/20	PKG-0119					
6B	7/14	www.we-online.com/midcom					
6A	5/11	SEE REVISION SHEET FOR REVISION LEVEL					
					eiSos p/n: 750312186		SPECIFICATION SHEET 1 OF 1