
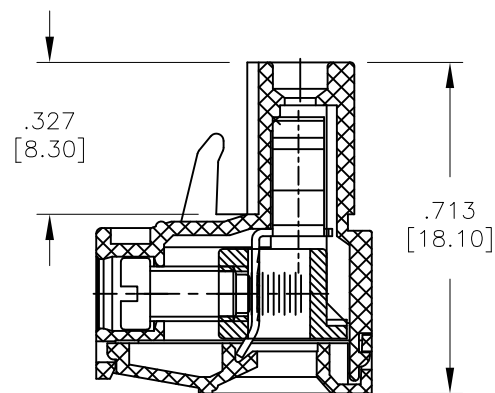


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/16/13	
A		UPDATE DRAWING	11/26/18	AY/IW

Only one Latch (2P)

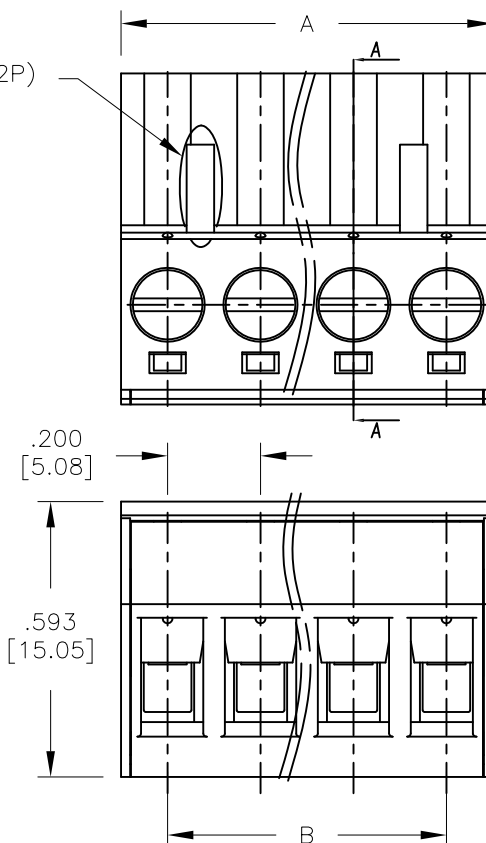

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: M3.0 Steel, Zinc plated

Clamp: Phosphor Bronze, Nickel plated

Wire Cage: Brass, Nickel plated

Electrical:

Voltage rated: 300 V

Current rated: 15 A

Contact resistance: 20 mΩ

Insulation resistance: 500 MΩ @ 500 VDC

Withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 28-14AWG 1.5mm²

Torque: 0.5N-m, 4.5lb-in

Strip length: 7-8mm

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



Poles: 2 thru 24

A= .200 [5.08] x No. of Positions per Row

B= .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	AY	10/16/13
CHECKED	NP	10/16/13
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.200 [5.08] TERMINAL BLOCK, SLOTTED SCREW

SIZE X	PART NO. EBHA-XX-D	REV. A
REF: S00067C	SCALE: NTS	SHEET 1 OF 1