


APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/4/09	
A		REVISED SHAPE	10/18/12	
B		UPDATE SPEC.	5/29/18	AY/SL
C		UPDATE DIM.	8/31/20	LH/EY

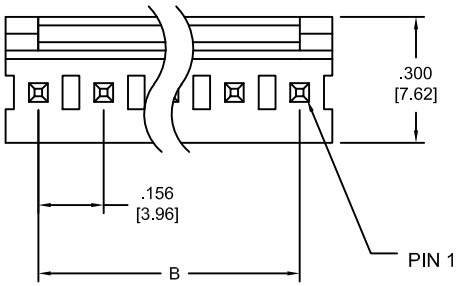

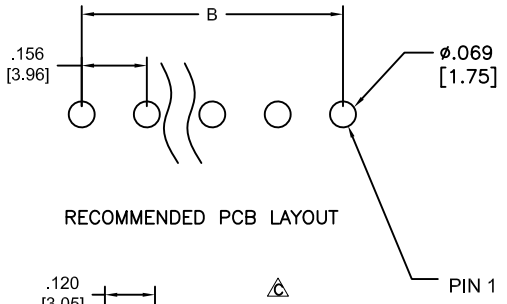

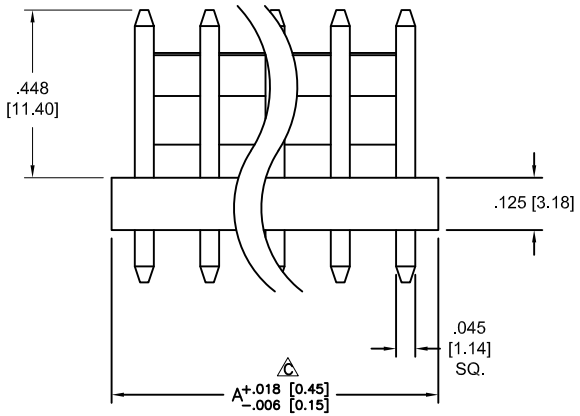

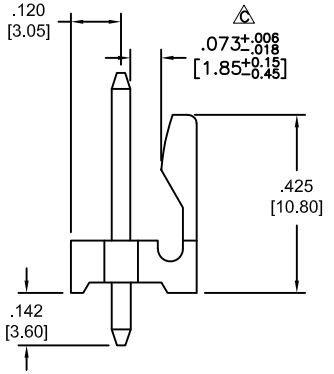

SPECIFICATIONS:
Material:
Insulator: Nylon PA66, rated UL 94V−0
Insulator color: White
Contacts: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 7 Amp
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
Operating temperature: −40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

Positions: 2 thru 20
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	1/4/09
CHECKED		
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] HEADER, STRAIGHT

SIZE	PART NO.	REV.
X	LHD-XX-TS-V0	C

REF: S00019C | SCALE: NTS | SHEET 1 OF 1