

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/20	
A		UPDATE SPEC.	8/31/21	WX/RC

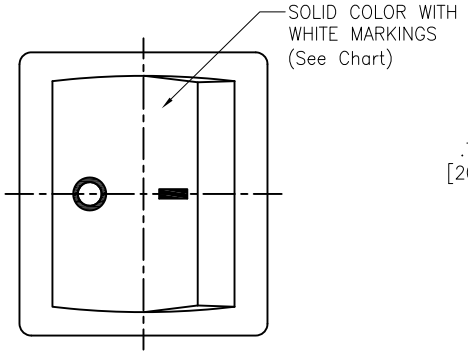





RECOMMENDED
PANEL CUT-OUT



CIRCUIT DIAGRAM
(DPST) ON-OFF

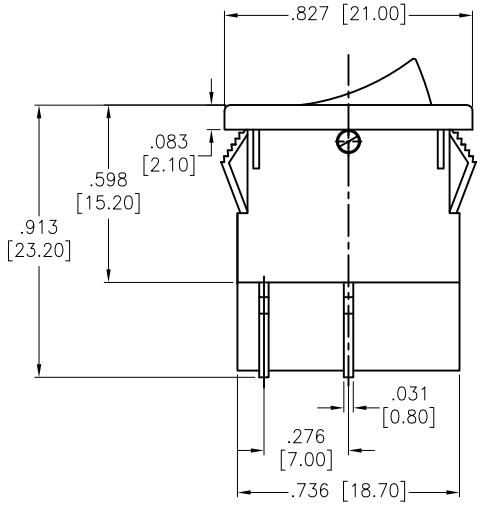

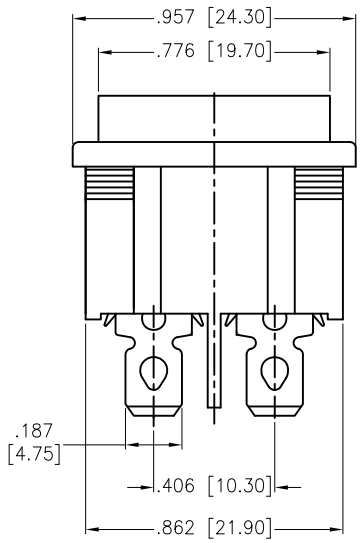

SW-R2-3A-F-XX-6

	Actuator Color
BLANK	Standard Black
W	White
R	Red
G	Green
Y	Yellow (Amber)
B	Blue
O	Orange

	Actuator Markings
1	
2	
3	
4	
5	

SPECIFICATIONS:
Body: Nylon 66, Color Black, Rated UL 94V-0
Terminal: Brass, Silver plated
Button: Nylon 66, Solid color, White color markings. (See Chart)
Electrical:
The rated load: 250V AC, 6A
125V AC, 10A
Contact resistance: 50 mohms max
Insulation resistance: 100 Mohms min
Dielectric withstanding voltage: 1500 VAC/5S min
Mechanical:
Electrical life: 10000 Cycles min
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant RoHS COMPLIANT

Replace "x" in P/N with the corresponding switch color and marking

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	OW	10/22/20
CHECKED	AC	10/22/20
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
SWITCH, MINIATURE ROCKER
DPST, ON-OFF, QC .187 [4.75MM]

SIZE	PART NO.	REV.
X	SW-R2-3A-F-XX-6	A

REF:	SCALE:	SHEET
S00206C	NTS	1 OF 1