
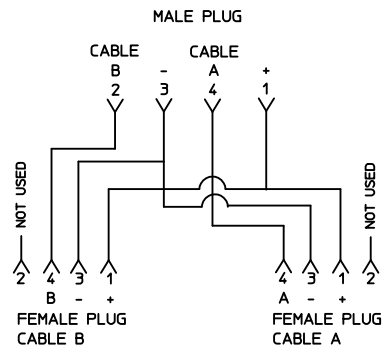
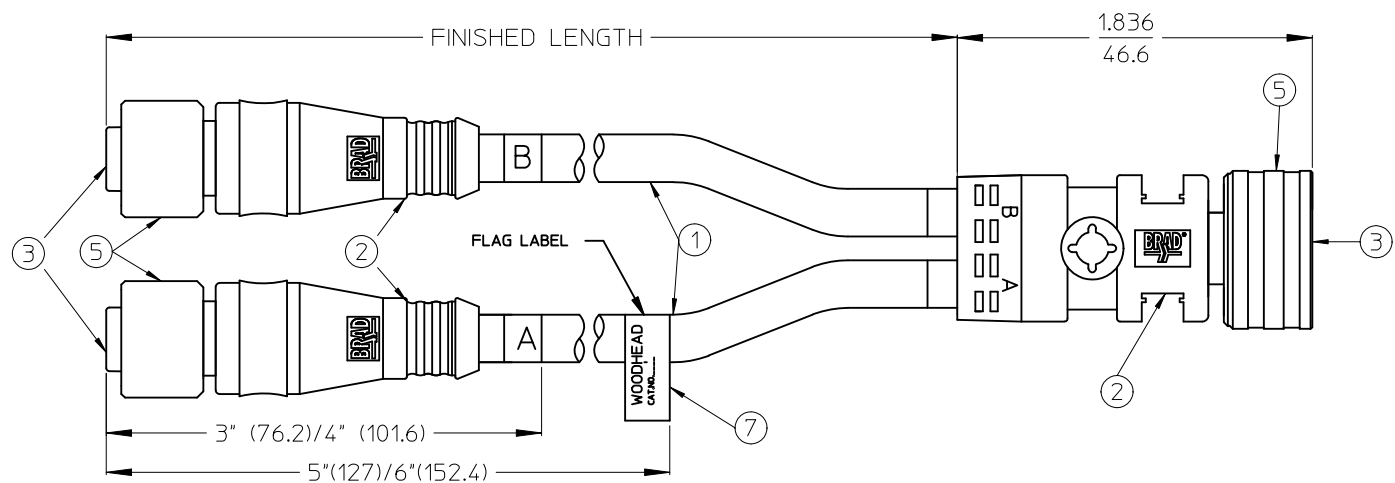


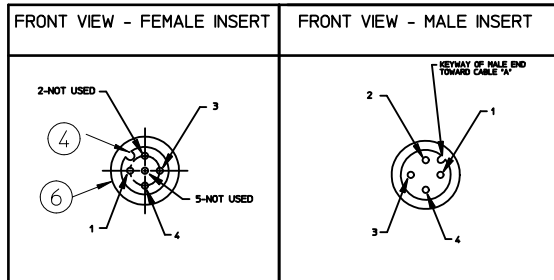

WIRING SCHEMATIC

VOLTAGE RATING:	300V
AMPERAGE RATING:	max. 4A
PROTECTION CLASS:	IP 68
OPERATING TEMPERATURE:	FLEXING -5°C TO +80 °C STATIC -30 °C TO +90 °C

1200800036	8W4A30A09M020	6.56' +3.50" -0 [2.0M +88.9 -0]
1200800035	8W4A30A09M010	3.28' +2.19" -0 [1.0M +55.6 -0]
1200800034	8W4A30A09M006	1.97' +1.75" -0 [0.6M +44.5 -0]
1200800033	8W4A30A09M003	0.98' +0.75" -0 [0.3M +19.1 -0]
MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	ORING	VITON	GREEN
5	ULTRA-LOCK	BRASS	NICKEL PLATED
4	CONTACT	COPPER ALLOY	Au OVER Ni
3	INSERT	PUR	BLACK
2	OVERMOLD	PVC	YELLOW
1	CABLE #22	PVC	YELLOW

ENTER DESCRIPTION	EC NO: WEU2010-0333	2010/02/09	2010/02/10	2010/02/25
	DRWN: APOHL WEU		CHKD: REISSNER	APPR: FPACHER
1				

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ±---	±---
3 PLACES ±---	±---
2 PLACES ±---	±0.1
1 PLACE ±0.3	±---
ANGULAR ±---°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
APOHL WEU	2010/02/09
CHECKED BY	DATE
REISSNER	2010/02/10
APPROVED BY	DATE
FPACHER	2010/02/24
MATERIAL NO.	
SIZE	A3

SCALE	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
TITLE MIC INL. SPLITTER XM PVC STR			
molex MOLEX INCORPORATED			
DOCUMENT NO. SD-120080-013			SHEET NO. 1 OF 1
AINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			