

6

5


4

3

2

1

FACE VIEW-FEMALE INSERT

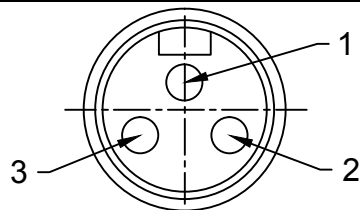


1 GREEN
2 BLACK
3 WHITE

MATERIAL P/N #

1300062099

ENGINEERING P/N

40925



1.06" REF.
[26.9mm]

Ø1.00 REF.

REF. 7/8-16
THREAD

72.00" $\begin{smallmatrix} +2.19" \\ -0.0 \end{smallmatrix}$
[1828.8mm $\begin{smallmatrix} +55.6mm \\ -0.0 \end{smallmatrix}$]

4.00"±1.00"
[101.6±25.4mm]

FLAG LABEL

SPECIFICATIONS:MINI-CHANGE RECEPTACLE:

RECEPTACLE SHELL: ZINC PLATED STEEL
CONTACT: GOLD/NICKEL OVER COPPER ALLOY
INSERT: YELLOW PVC
CLAMP NUT: CLEAR ANODIZED ALUMINUM
PLASTIC FERRULE: WHITE NYLON
METAL FERRULE: ZINC PLATED STEEL
LABEL: YELLOW VINYL

WIRE: #16/1 THERMOPLASTIC 1015/TEW WIRE
WIRE MARKING: STYLE 1015, MTW AND CSA
TEW, 26AWG, 600V AND 105°C
ASSEMBLY RATINGS: 600V Max., 13A Max.
PROTECTION CLASS: IP67

1.23 WAS 2.45
EC NO: IPG2015-0288
DRWN: RSTONE
CHKD: BWOODMAN
APPR: BWOODMAN
8/13/14
2014/08/14
2009/08/28

QUALITY
SYMBOLS
=0
=0

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	±---	±---
3 PLACES	±---	±.005
2 PLACES	±0.13	±0.020
1 PLACE	±0.25	±0.010

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY DATE
T.V. 2009/08/25
CHECKED BY DATE
B.WOODMA 2009/08/25
APPROVED BY DATE
DTITUS 2009/08/28

SCALE
NTSDESIGN UNITS
INCHTHIRD ANGLE
PROJECTION

TITLE

MC 3P FP
LIQUID TIGHT
16AWG PVC



MOLEX INCORPORATED

MATERIAL NO.

SEE CHART

DOCUMENT NO.

SD-130062-005

SHEET NO.

1 OF 1

SIZE
A

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

6

5

4

3

2

1