

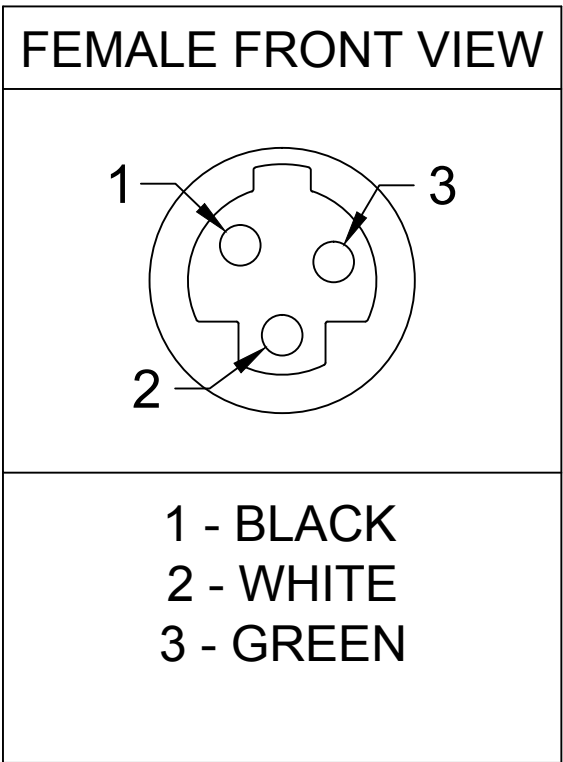


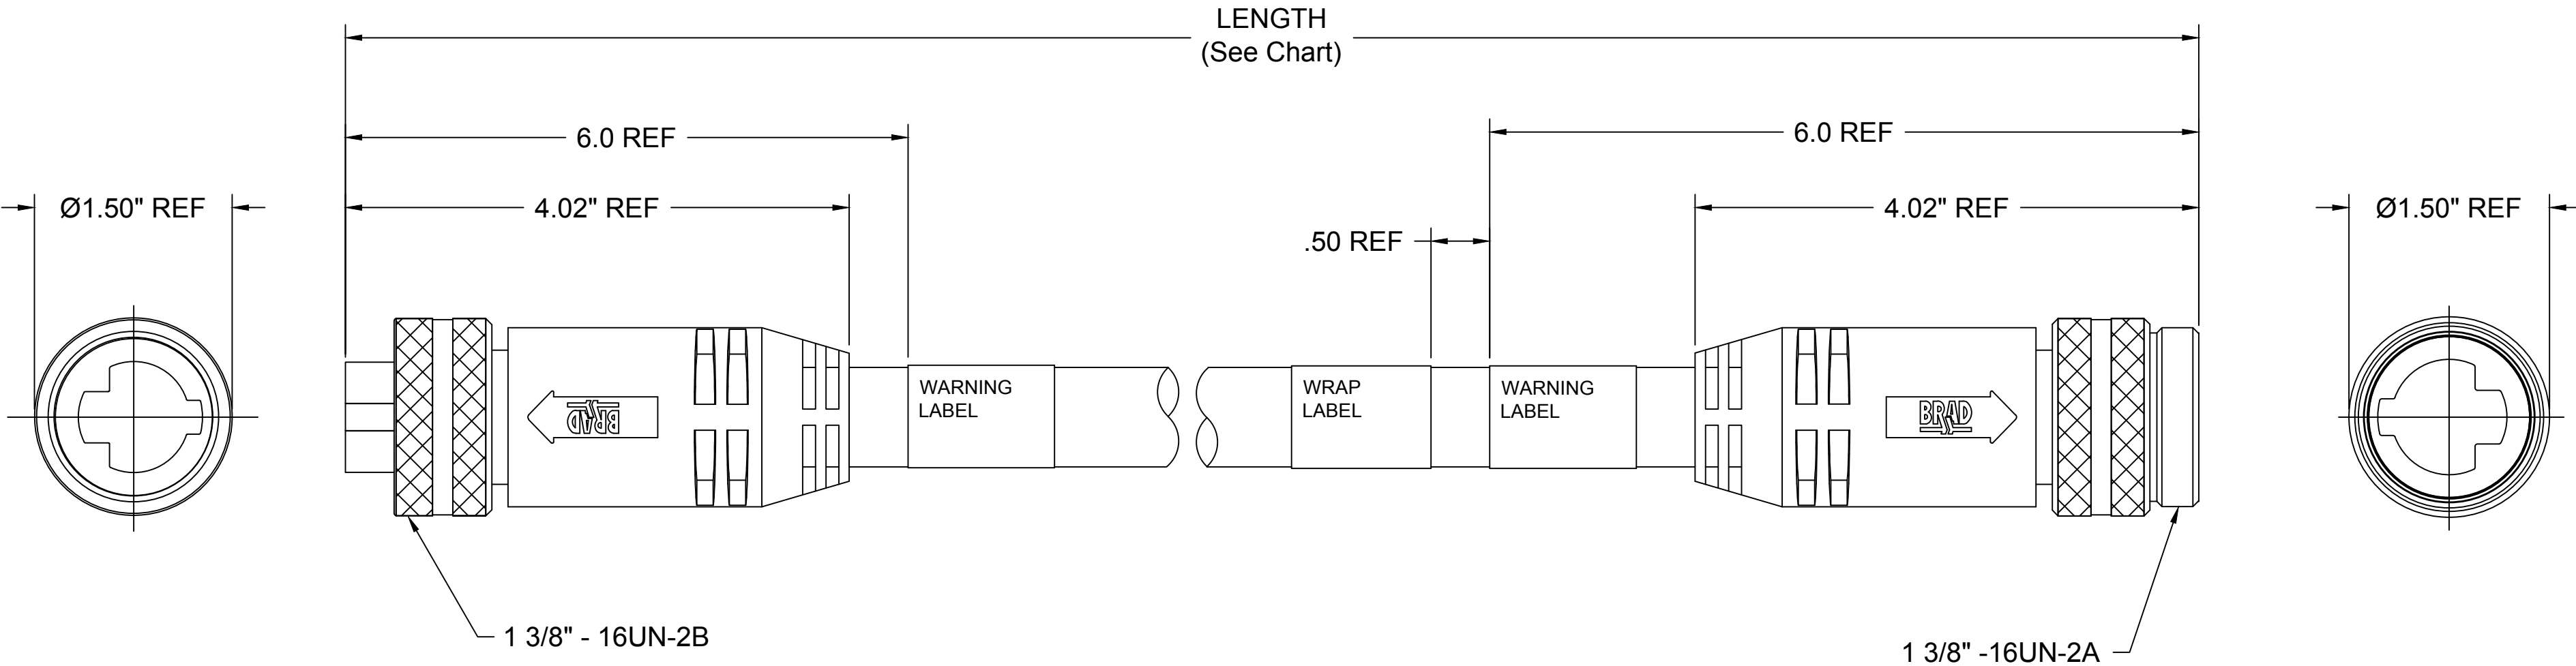

ENG No: CC3130A64MXXX

LENGTH
M005 = 0.5M
M010 = 1M
M100 = 10M

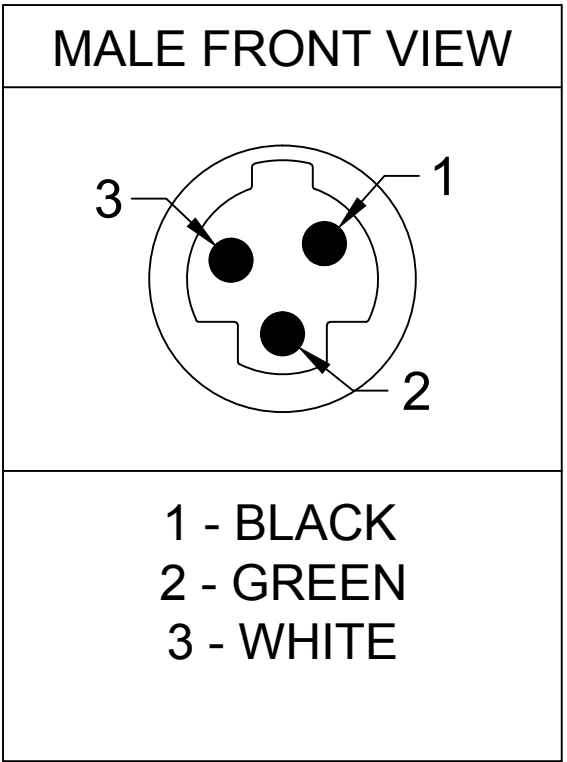

SPECIFICATIONS:

OVERMOLD: BLACK PVC
INSERT: BLACK PVC
CONTACTS: COPPER ALLOY, GOLD OVER NICKEL
COUPLING NUT: ANODIZED ALUMINUM
CABLE (A64): #10/3 BLACK PVC
ELECTRICAL: 600V AC/DC, 30A
TEMPERATURE RATING: -20°C to 105°C
PROTECTION: IP67

RELEASED EC NO: IPG2015-2148 DRWN: GSUDHINI 2015/06/18 CHKD: BARDEN 2015/06/24 APPR: JFMURPHY 2015/08/27	DESCRIPTION REV	QUALITY SYMBOL ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY GSUDHINI	DATE 2015/06/18	TITLE QUICK CHANGE FEM/MALE STR/STR #10 BLK PVC						
			4 PLACES	±---	±---	CHECKED BY BARDEN	DATE 2015/06/24							
			3 PLACES	±---	±.005	APPROVED BY JFMURPHY		DATE 2015/08/27		MOLEX INCORPORATED				
			2 PLACES	±0.13	±.010									
			1 PLACE	±0.25	±.020	MATERIAL NO. SEE MATRIX		DOCUMENT NO. SD-130064-007					SHEET NO. 1 OF 1	
			ANGULAR ±.5°			SIZE C							THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS														