

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORPORATION.


PANDUIT PART NUMBER	CABLE TIE		DIMENSIONS				MATERIAL	WEIGHT grams/100pcs
	MIN TENSILE	MAX BUNDLE	"A"	"B"	"C" (REF)	"D" (REF)		
PUM-071-2S-_30	50LBS (222N)	1.88" (48)	16.9	10.4	16.5	188.0	HEAT STABILIZED NYLON 6/6 BLACK	165







NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, AND COLOR.
2. (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
3. APPLICATION SPECIFICATION:
   HOLE DIAMETER: 6.3 - 7.1 mm
   PANEL THICKNESS: 0.8 - 7.0 mm

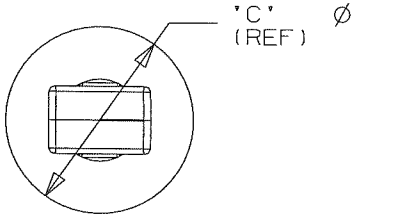


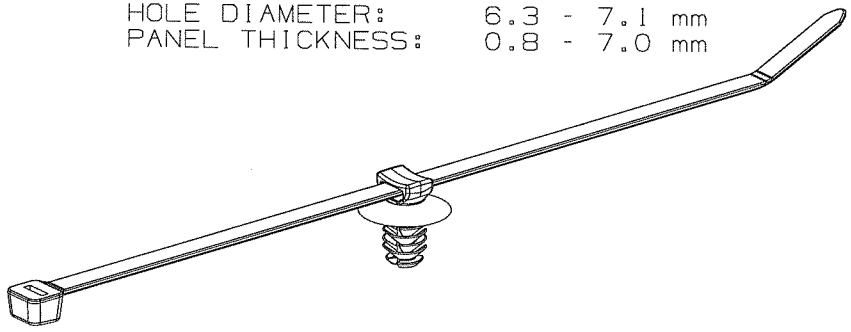

SCALE .75



SCALE .75



REV	DATE	BY	CHK	DESCRIPTION	ECN - R		CUST	SUP
10B	10-6-08	PSG		DELETED, AND RENAMED DIMENSIONS	GB0239LL	10B	KLN	
10A	8-22-08	PSG		REMOVED RIB FROM HEAD, UPDATED FILE NAME, AND CHANGED REV TO TC REV STYLE	GB0239LL	10A		
1	8-11-06	TMSA		UPDATED DIMENSIONS C FROM 10.5 D FROM 17.0	GB0239LL	1		
R	7-10-06	KLN		INITIAL RELEASE	GB0239LL	R		

CAD FILENAME/LAYERS: G0315188_DC_GB0239LL/10B

PANDUIT CORP. TINLEY PARK, ILLINOIS

PUM-071-2S-_30
PUSH MOUNT / CABLE TIE ASSEMBLY

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE METRIC
TOLERANCE: ±0.5MM

DRAWN BY	MAT'L:	SCALE
KLN	SEE TABLE	1:1 UNLESS NOTED
DATE: 7-10-06		DRAWING NO.: GB0239LL
CHK'D: KLN		DWG: A SIZE