
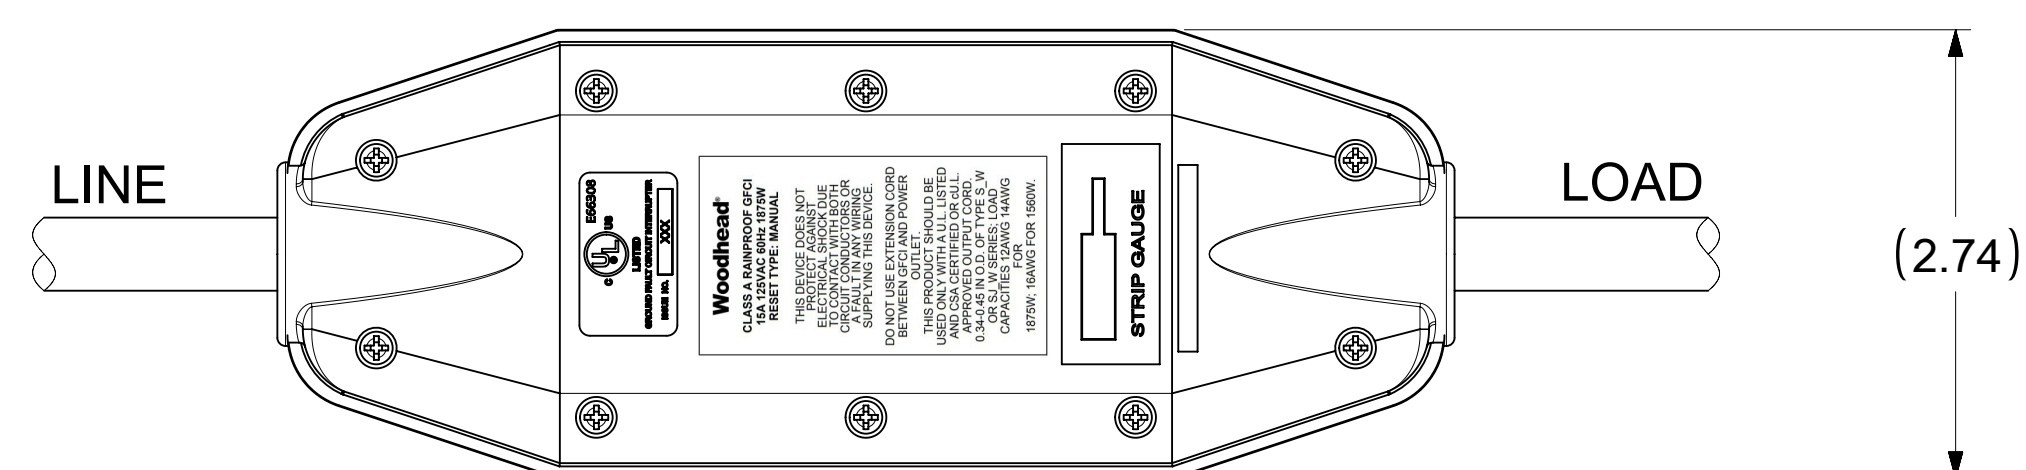
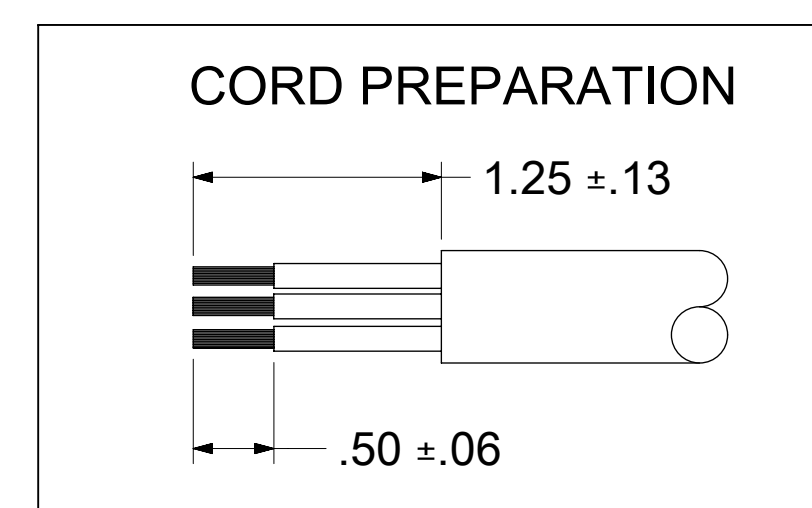
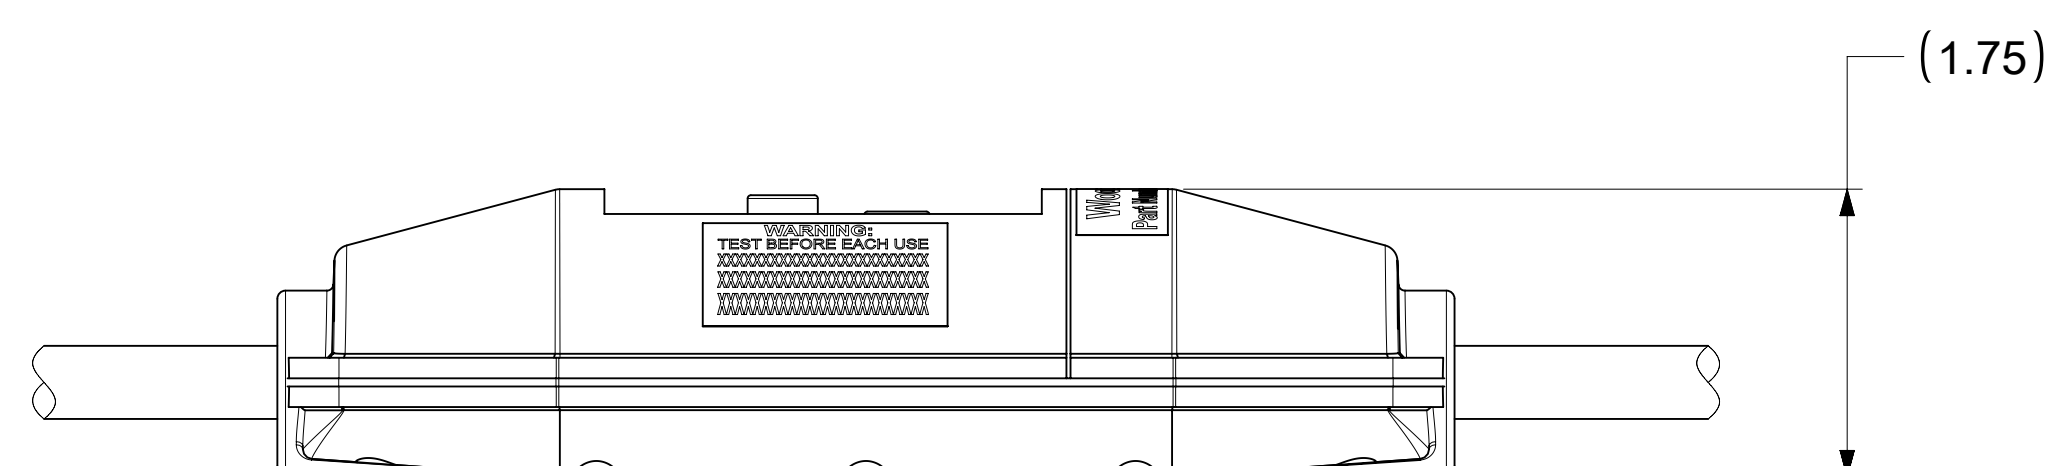


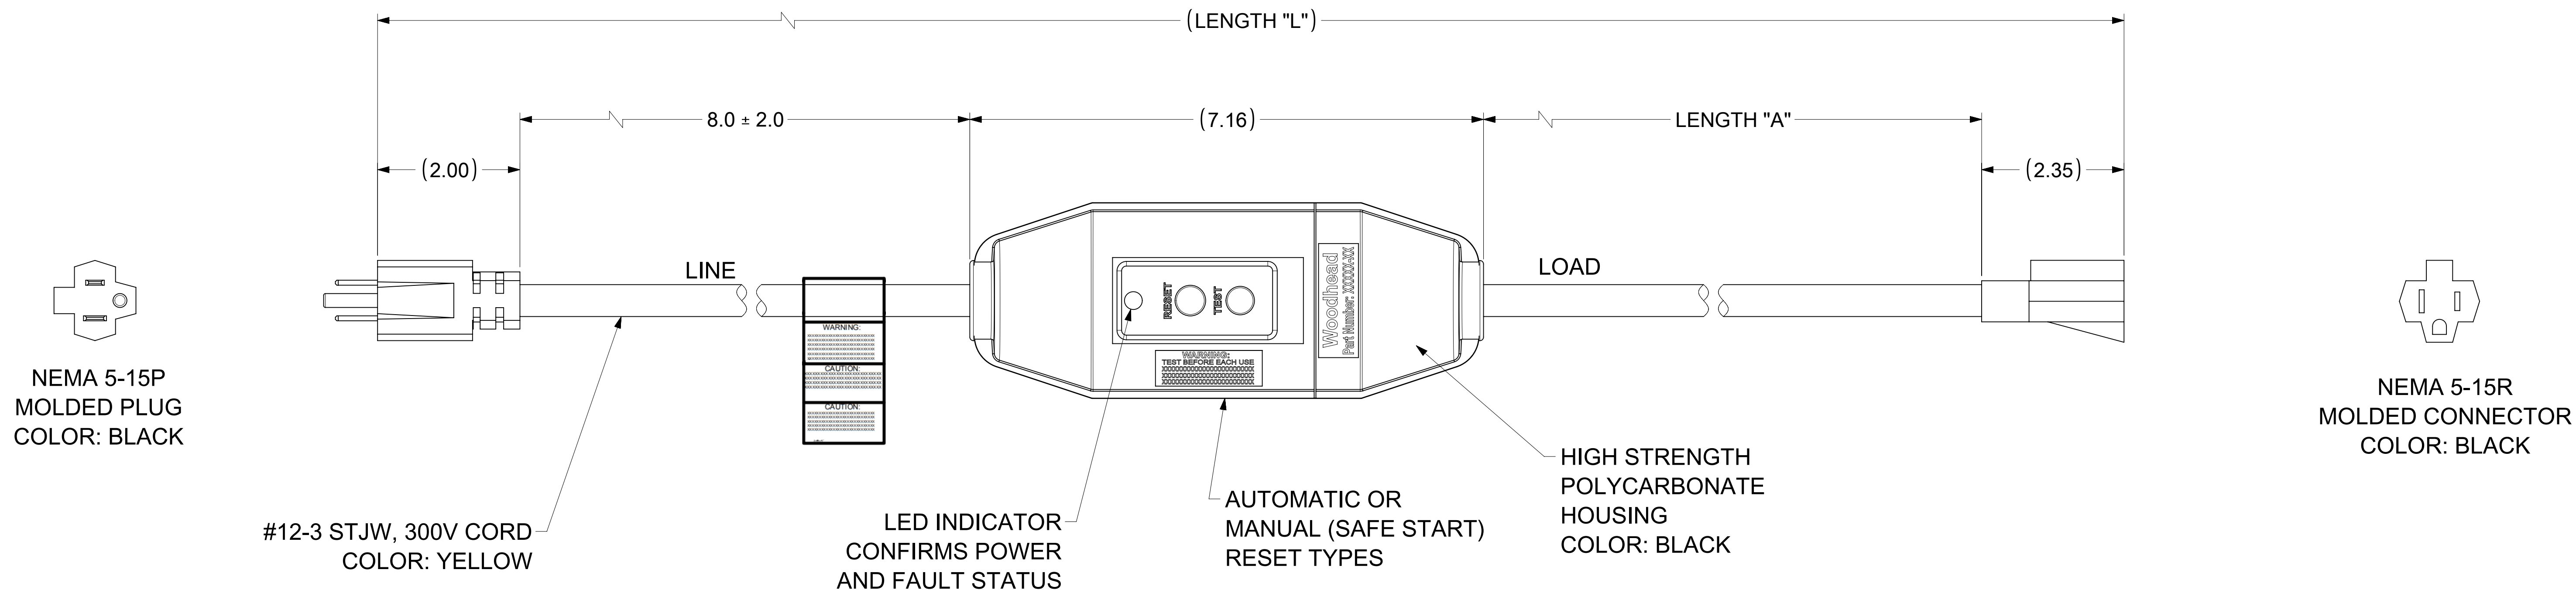

MATERIAL NO.	ENGINEERING NO.	LENGTH "L"	LENGTH "A"	POWER-UP
1301530020	15050-1A	2 FT 7.5 IN	1 FT ± 1 IN	AUTO
1301530037	15050-6A	7 FT 7.5 IN	6 FT ± 2 IN	AUTO
1301530023	15050-25A	26 FT 7.5 IN	25 FT ± 2 IN	AUTO
1301530031	15050-50A	51 FT 7.5 IN	50 FT ± 4 IN	AUTO
1301530021	15050-1M	2 FT 7.5 IN	1 FT ± 1 IN	MANUAL
1301530038	15050-6M	7 FT 7.5 IN	6 FT ± 2 IN	MANUAL
1301530024	15050-25M	26 FT 7.5 IN	25 FT ± 2 IN	MANUAL
1301530032	15050-50M	51 FT 7.5 IN	50 FT ± 4 IN	MANUAL

<u>TECHNICAL:</u>	
LISTED:	UL AND cUL
RATED SUPPLY VOLTAGE:	120 VAC
RATED CURRENT:	UP TO 15 AMPS OR CABLE RATING
RESET TYPE:	AUTOMATIC OR MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	90 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC:				molex							
INCH		NTS													
GENERAL TOLERANCES (UNLESS SPECIFIED)		ANGULAR TOL ± 0.5°		EC NO: 686220				120V 15A INLINE GFCI W/ MOLDED PLUG & CONN NEMA 5-15							
4 PLACES		±		DRWN: VBASUTHKARP 2021/11/11											
3 PLACES		±		CHK'D: DNGUYEN62 2021/12/01											
2 PLACES		± 0.13		APPR: HKNEELAND 2022/01/04											
1 PLACE		± 0.25		INITIAL REVISION:				PRODUCT CUSTOMER DRAWING							
0 PLACES		±		DRWN: HRUIZ01 2013/02/06											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
				D-SIZE		130153		SD-130153-013		PSD		001		A1	
								MATERIAL NUMBER		CUSTOMER				SHEET NUMBER	
								SEE TABLE		NORTH SHORE SAFETY				1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/04	19:20:27
-----------------	----	--------------	------------	----------