
Pomona®

Model 4528
Cable Assembly
SMA Male To SMA Female

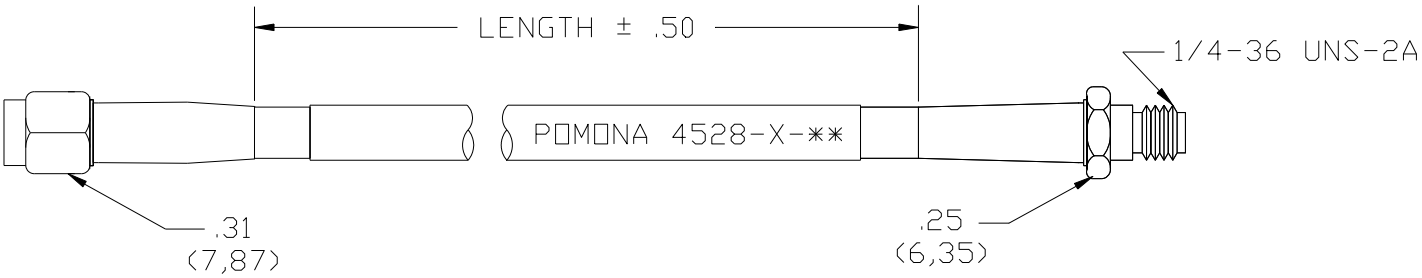

	CABLE TYPES	
	RG 174/U Black	RG 142B/U Tinted Brown
	4528-K-XX	4528-X-XX
Cap. pF/ft.	30.8	29.0
Nom. Imp. Ohms	50	50
Loss	.45 dB/ft @ 1.0 GHz Max	.67 dB/ft @12.4GHz Max
Temperature	+85ºC. (+185ºF.) Max.	+200ºC. (+392ºF.) Max

MATERIALS:

Connectors: SMA (Male) & SMA (Female) Crimp
Body – Passivated Stainless Steel, Contact: Gold Plated Brass, Center Contact: Beryllium Copper
Dielectric – Teflon
Finish: Contact – Gold plated
Body – Nickel plated
Cable: See Tab Block
Marking: "Pomona 4528-X-XX"

RATINGS:

Operating Voltage: 335 VRMS Max.

ORDERING INFORMATION: Model 4528-X-XX
X=Cable type (see table above)
XX = Cable Lengths
4528-K, Standard Length 48" (1219)
4528-X, Standard Lengths 24" (610), & 48" (1219)
Additional lengths can be quoted upon request.
Ordering Example: 4528-X-24 Indicates 24" in length.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies.

Made in USA

6/9/99