

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/23/14	
A		REVISED LAYOUT DIM.	11/25/14	AY/MY
B		UPDATED DRAWING	5/11/18	HR/NP

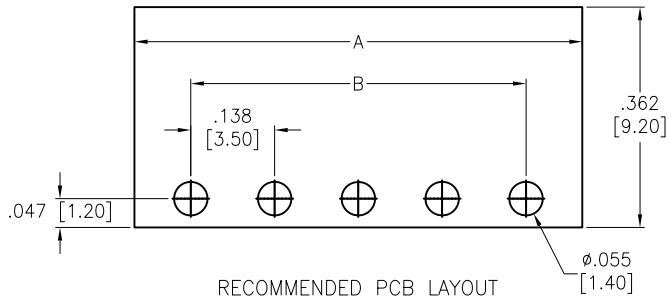


RECOMMENDED PCB LAYOUT

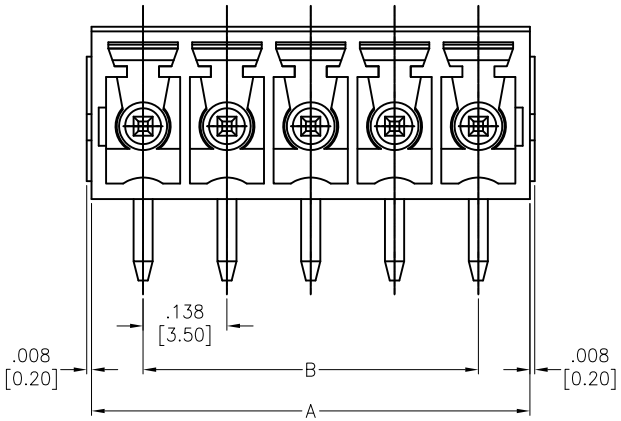

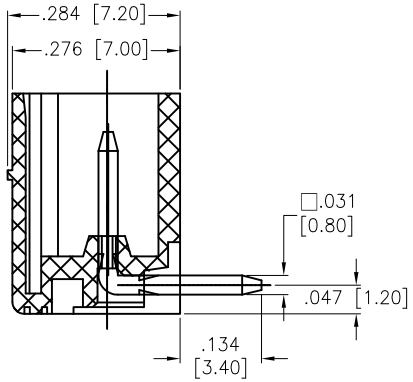

SECTION A–A

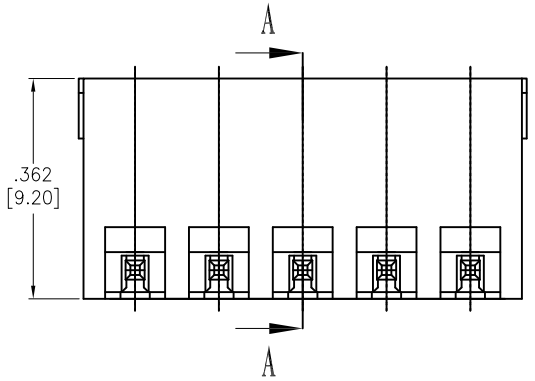

SPECIFICATIONS:
Material:
Insulator: PA66, rated UL 94V–0
Insulator color: Green
Contact: Brass, Tin plated
Electrical:
Voltage rating: 300 V
Current rating: 8 A
Contact resistance: 20 mohms
Insulation resistance: 500 Mohms @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Temperature Rating:
–40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24
A= .138 [3.50] x No. of Spaces + .169 [4.30]
B= .138 [3.50] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AC	6/23/14
CHECKED	SC	6/23/14
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: TERMINAL BLOCK, RIGHT ANGLE, .138" [3.50] PITCH

SIZE	PART NO.	REV.
X	EBSA-XX-A	B

REF: S00067C | SCALE: NTS | SHEET 1 OF 1