

E

E

D

D

C

C




B

B

A

A

MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
120072-0302	703006D02F060	6.00' +3.50' -0 [1.8M +88.9 -0]
120072-0305	703006D02F120	12.00' +6.50' -0 [3.7M +165.1 -0]
120072-0308	703006D02F200	20.00' +6.50' -0 [6.1M +165.1 -0]

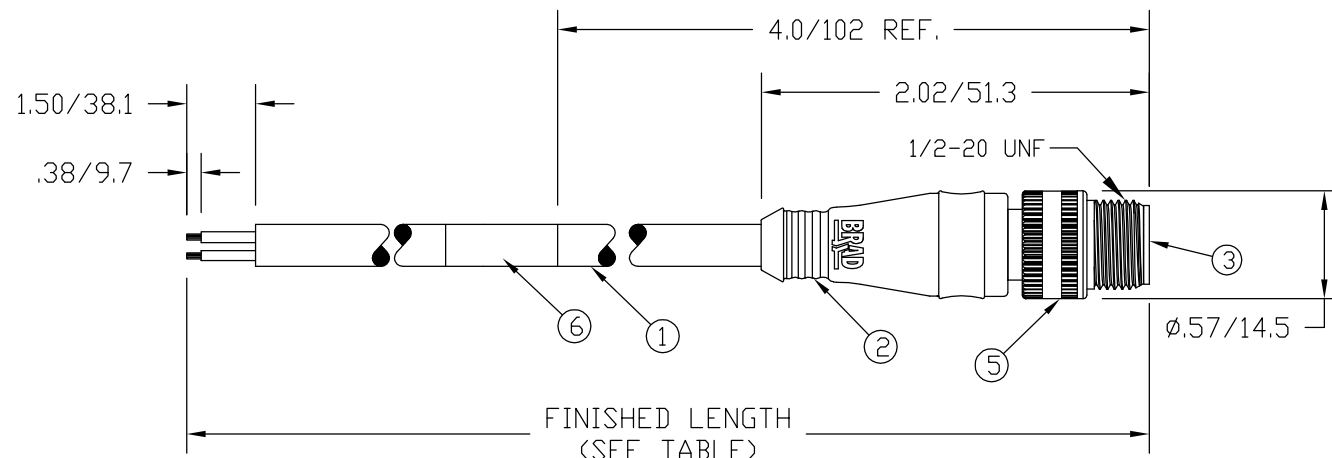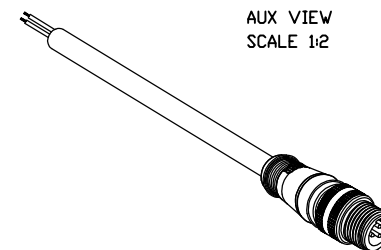

MALE FACE VIEW

1	GREEN-GND
2	RED-BLACK
3	RED-WHITE

WIRING DIAGRAM

- NOTES:
- 1) MATERIALS: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) CABLE: #22/3 SHIELDED PVC
 - 4) ELECTRICAL DATA:
MAX. VOLTAGE: 250 VAC/VDC
MAX. CURRENT 4 AMPS
 - 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 105°C
 - 6) WRAP LABEL IS MARKED WITH P/N, DATE CODE,
VOLTAGE & AMPERAGE.
 - 7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	MYLAR	BLACK/YELLOW
5	1	COUPLER	ZINC DIE CAST	BLACK E-COAT
4	3	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	1	INSERT	NYLON	BLACK
2	1	OVERMOLD	PVC	YELLOW
1	1	#22/3 CABLE W/BRAID SHIELD	PVC JACKET	YELLOW

RELEASED DRAWING EC NO: WEU2010-0017 DRWN: L HARTMAN 7/17/09 CHKD: BWOODMAN 09/07/29 APPR: JF MURPHY 2009/08/10	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
		4 PLACES	mm	INCH	DRAWN BY LHARTMAN	DATE 2009/07/17	TITLE MICRO-CHANGE CORDSET 3P MA ST DUAL KEY BRAID SHIELD PVC CABLE MOLEX INCORPORATED			
		3 PLACES	±----	±----	CHECKED BY BWOODMAN	DATE 2009/07/29				
		2 PLACES	±----	±.01	APPROVED BY		DATE	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-120072-005	SHEET NO. 1 OF 1
A		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				