
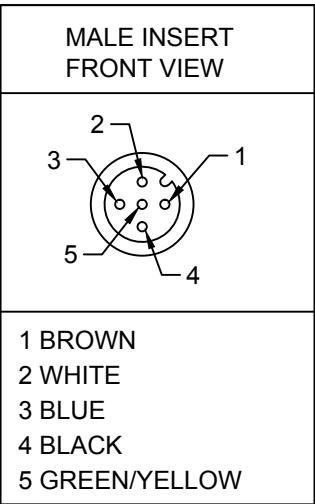


MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
1211930007	T05007B30M003	0.3 M +1.9 CM/-0 [1.0' +0.75"/-0]
1211930008	T05007B30M010	1.0 M +5.6 CM/-0 [3.3' +2.19"/-0]

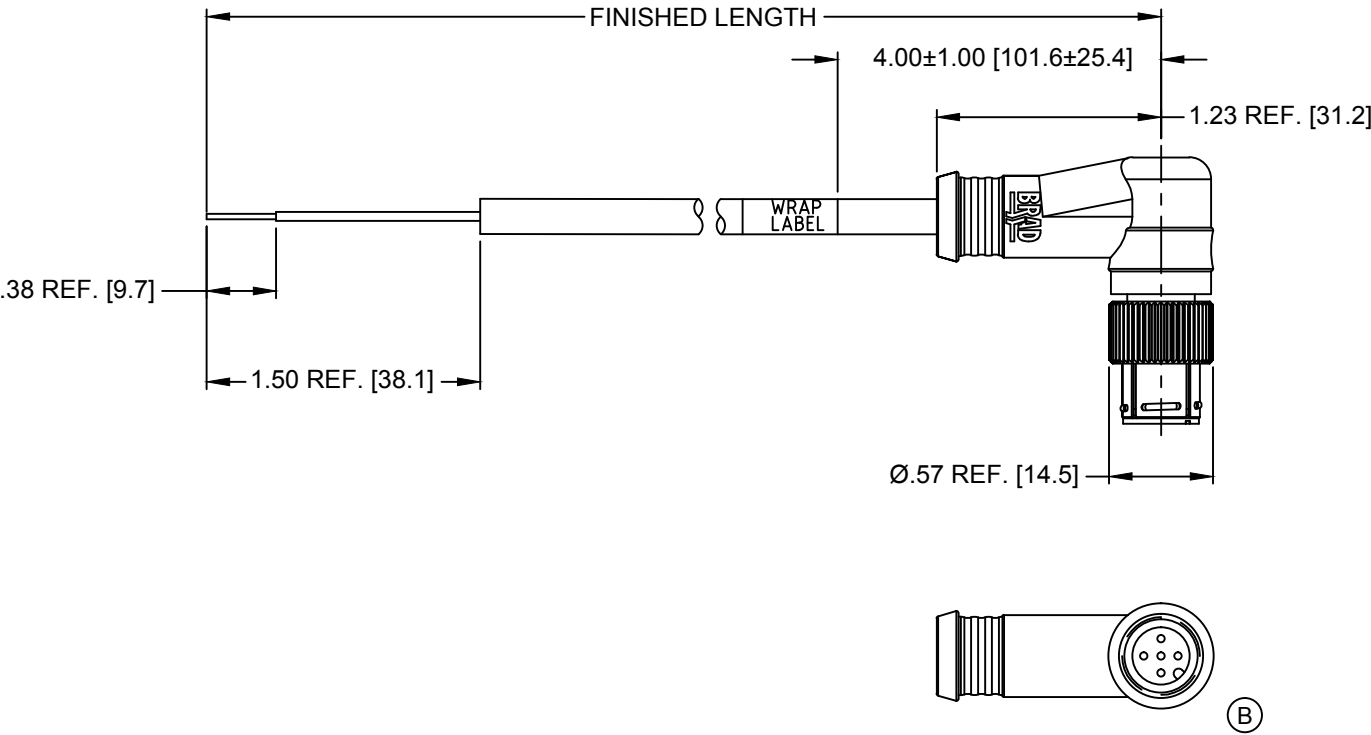

T05007B30M020

WIRE TYPE
0.34mm² [22 AWG] BLACK

CABLE LENGTH
M003----0.3 METER
M020----2 METER
M100----10 METER

MECHANICAL
CONTACT : GOLD/NICKEL OVER COPPER ALLOY
INSERT : BLACK NYLON
COUPLING NUT: NICKEL PLATED COPPER ALLOY
MOLDED BODY: BLACK TPE
CABLE: 0.34mm² [22 AWG] 5 CONDUCTORS BLACK JACKET
WRAP LABEL: MYLAR YELLOW WITH BLACK LETTERS

ELECTRICAL
VOLTAGE RATING: 250V AC/DC
AMPERAGE: 4A

ENVIRONMENTAL
PROTECTION: IP67

OPERATION TEMP: -20°C~80°C

THE RECOMMENDED FEMALE CONNECTOR SHOULD HAVE
NICKEL PLATING ON THE FEMALE THREADS

REVISED FACE VIEW EC NO: IPG2015-1880 DRWN: KJOZWIK 2015/05/05 CHKD: APPR: BWOODMAN2014/05/09	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE INCH [MM]		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY KJOZWIK	DATE 2014/02/13	TITLE MIC 5P MALE PUSHLOCK 90 DEGREE BLACK TPU					
			4 PLACES	±---	±---	CHECKED BY VOU	DATE 2014/04/25						
			3 PLACES	±---	±---	APPROVED BY BWOODMAN					DATE 2014/05/09		
			2 PLACES	±---	±---								
			1 PLACE	±---	±---								
			ANGULAR ±.5°			MATERIAL NO. SEE CHART			DOCUMENT NO. SD-121193-002			SHEET NO. 1 OF 1	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										
			B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								