


6	5	4	3	2	1
APPROVED: _____			Rev	AWO #	Description
DATE: _____ TITLE: _____			-		RELEASED
					Date
					2/21/20
					Appr

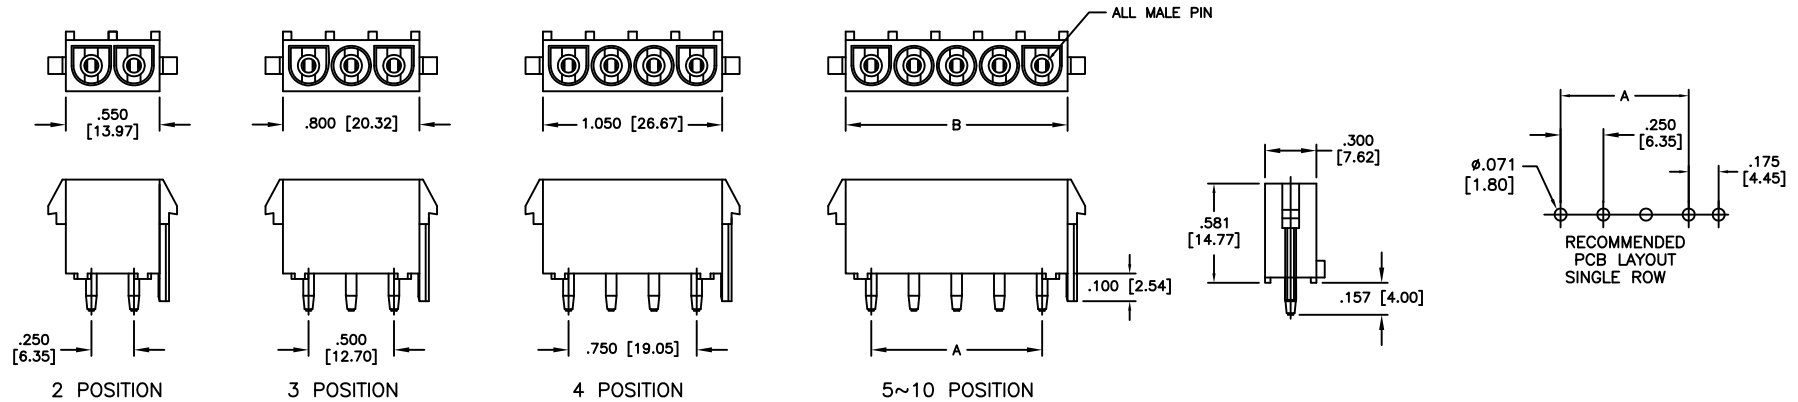

Poles	Dimensions			
	A		B	
02	.250	[6.35]	.550	[13.97]
03	.500	[12.70]	.800	[20.32]
04	.750	[19.05]	1.050	[26.67]
05	1.000	[25.40]	1.307	[33.20]
06	1.250	[31.75]	1.550	[39.37]
07	1.562	[38.10]	1.800	[45.72]
08	1.750	[44.45]	2.050	[52.07]
09	2.000	[50.80]	2.300	[58.42]
10	2.250	[57.15]	2.550	[64.77]

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contacts: Phosphor Bronze, Tin plated

Electrical:

Current rating: 02~10P: 12 Amp Max (With UL1015, 12AWG)

Contact resistance: 20 mohms max

Insulation resistance: 1,000M ohms min

Dielectric withstanding voltage: 2,900 VAC for 1 minute

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010			<div>ADAM — — TECH INTERCONNECTS</div>		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS			DATE		TITLE WIRE TO BOARD, FEMALE, 6.35mm PITCH, WITH POLARIZING PEG, MALE PIN			
DRAWN		LH		2/21/20				
CHECKED		AY1		2/21/20				
APPROVED								
REF: S00124T			SCALE: NTS			SHEET 1 OF 1		