

SMC MALE - BNC FEMALE STRAIGHT ADAPTER


-

R191.120.000


Série : **ADAPT**

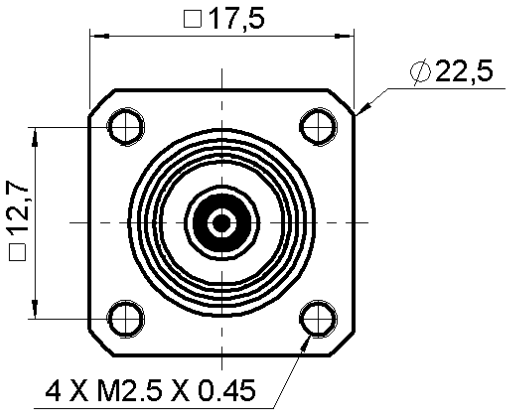


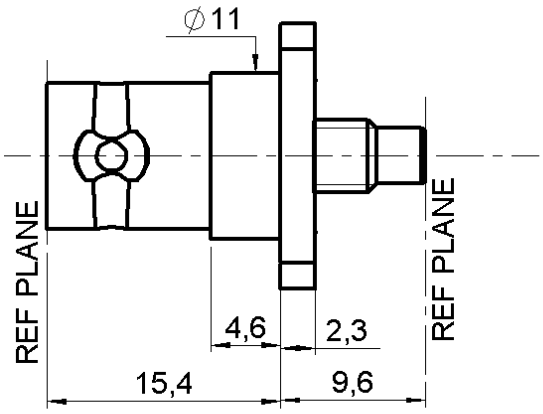



	mm	
	Maxi	mini
A	11.3	11.2
B	2.7	2.6
C	12.8	12.7



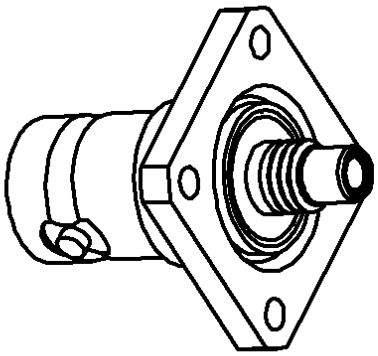

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**NICKEL 2**
CENTER CONTACT	**BERYLLIUM COPPER**	**GOLD 1.3 OVER NICKEL 2**
OUTER CONTACT	-	-
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	**BRASS**	**NICKEL 2**
-	-	-
-	-	-

Issue : 0302 M

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIALL®

SMC MALE - BNC FEMALE STRAIGHT ADAPTER

-

R191.120.000

Série : **ADAPT**

PACKAGING

Standard	Unit	Other
1	-	**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**1.2** +	**0.000**	x F(GHz) Maxi
Insertion loss		**0.125**	√F(GHz) dB Maxi
RF leakage	- (	**62**	- F(GHz)) dB Maxi
Voltage rating		**335**	Veff Maxi
Dielectric withstanding voltage		**1000**	Veff mini
Insulation resistance		**1000**	MΩ mini

ENVIRONMENTAL

Operating	**-65/+125**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating end		**10**	N mini
Axial force – Opposite end		**10**	N mini
Torque		**NA**	N.cm mini
Recommended torque			
Mating	**SMC**	**0**	N.cm
	BNC	**0**	N.cm
	-	**0**	N.cm
Panel nut		**NA**	N.cm
Mating life		**500**	Cycles mini
Weight		**13.000**	g

OTHERS CHARACTERISTICS

-

Issue : 0302 M

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIALL®