

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/1/16	
A		UPDATE DRAWING	9/30/20	AY/DH

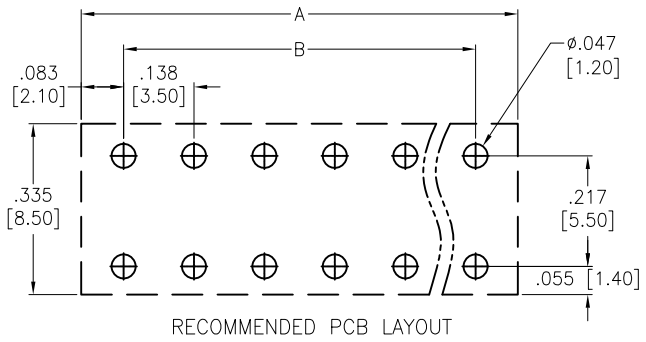

RECOMMENDED PCB LAYOUT

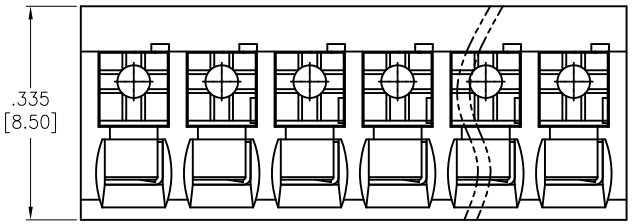

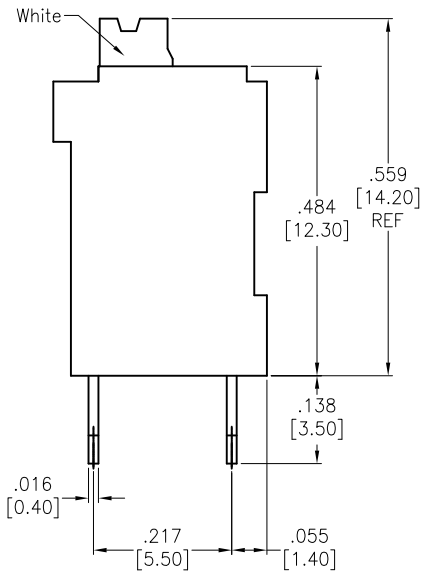

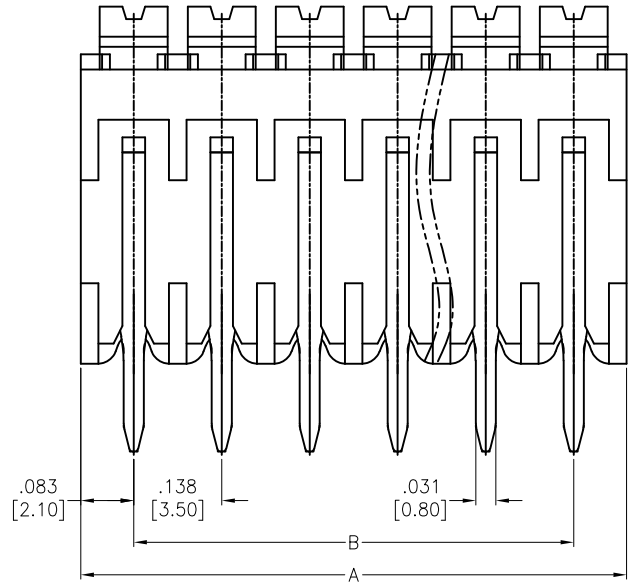

Positions: 02 thru 24
A= .135 [3.50] x No. of Spaces + .165 [4.20]
B= .135 [3.50] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: LCP, rated UL 94V-0
Insulator color: Black
Contact: Copper Alloy, Tin plated
Electrical:
Voltage rating: 300V
Current rating: 10 A
Withstanding Voltage: 1600 V/1 Min
Mechanical:
Wire range: 24-16 AWG
Stripping length: 7~8mm
Temperature Rating:
Operating temperature: -40°C to +130°C
ENVIRONMENTAL:
Lead free, rohs compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	6/2/16
CHECKED	AT	6/2/16
APPROVED		

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
EURO BLOCK, .135 [3.50] PITCH

SIZE	PART NO.	REV.
X	EB142A-XX-A-180	A

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1