


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/21/20	


APPROVED: _____

DATE: _____ TITLE: _____

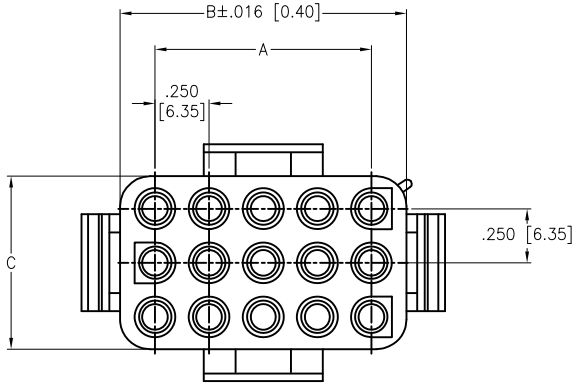


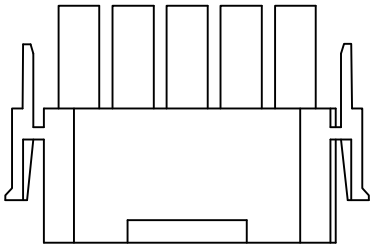






06P




15P



09P

PRODUCT VIEW



12P

Poles	Dimensions				
	A	B	C	D	E
06	.250 [6.35]	.550 [13.97]	.800 [20.32]	.094 [27.80]	1.091 [27.70]
09	.500 [12.70]	.807 [20.50]	.807 [20.50]	1.110 [28.20]	1.106 [28.10]
12	.750 [19.05]	1.067 [27.10]	.807 [20.50]	1.110 [28.20]	1.106 [28.10]
15	1.000 [25.40]	1.343 [34.10]	.811 [20.60]	1.114 [28.30]	1.122 [28.50]

SPECIFICATIONS:
Material:
Insulator: Nylon66, rated UL 94V-2
Insulator color: Natural
Electrical:
Current rating: 06~15P: 9 Amp Max (With UL1007, 16AWG)
Contact resistance: 20 mohms max
Insulation resistance: 1,000M ohms min
Dielectric withstanding voltage: 2,900 VAC for 1 minute
Temperature Rating:
-40°C to +105°C
Environmental:
Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	2/21/20
CHECKED	AY1	2/21/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.250 [6.35MM] PITCH CONNECTOR, 06~15 POS
HOUSINGS, MALE, VERTICAL

SIZE	PART NO.	REV.
X	DME-M2-XX-SQ	-

REF:	SCALE:	SHEET
S00124T	NTS	1 OF 1