

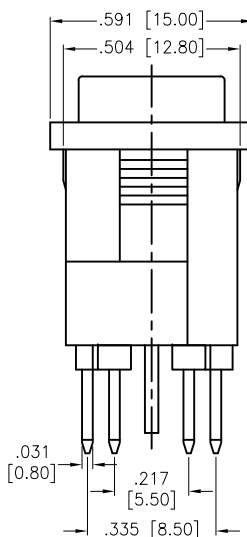
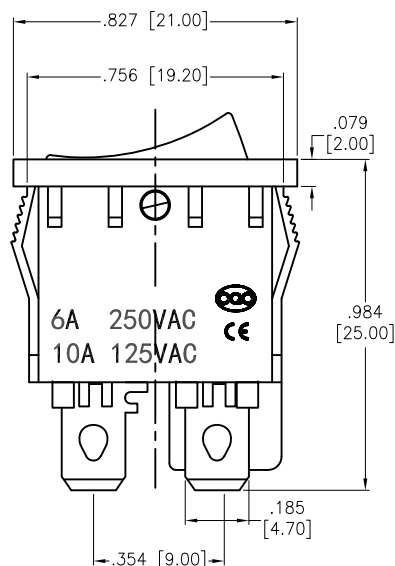


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/27/21	
A		UPDATE DRAWING	8/12/22	WX/AC1

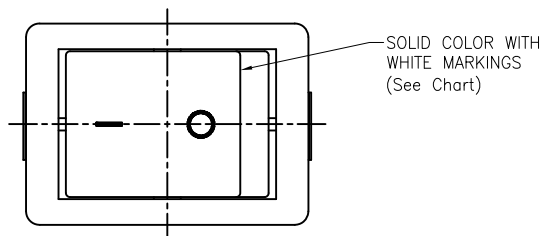

CIRCUIT DIAGRAM
(DPST) ON-OFF

SW-R2-3A-F-X-4

	Actuator Markings
1	
2	
3	
4	
5	

SPECIFICATIONS:

Material:

Body: Nylon 66, Color Black, Rated UL 94V-0

Terminal: Brass, Silver plated

Button: Nylon 66, Solid color Black, White color markings.

Electrical:

Rating: 10A @ 125V AC

6A @ 250V AC

Contact resistance: 50 mohms max

Insulation resistance: 100 mohms min

Dielectric withstanding voltage: 1500V AC

Electrical Life: 10,000 cycles min.

Temperature Rating:

Operating temperature: T85

Environmental:

Lead free, RoHS compliant



Replace "x" in P/N with the corresponding switch color and marking

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	WX	10/27/21
CHECKED	RC	10/27/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE SWITCH, ROCKER, DPST, ON-OFF, COLOR
BLACK, PANEL MOUNT, .187" [4.8] SOLDER

SIZE X	PART NO. SW-R2-3A-F-X-4	REV. A
REF: S00206C	SCALE: NTS	SHEET 1 OF 1