

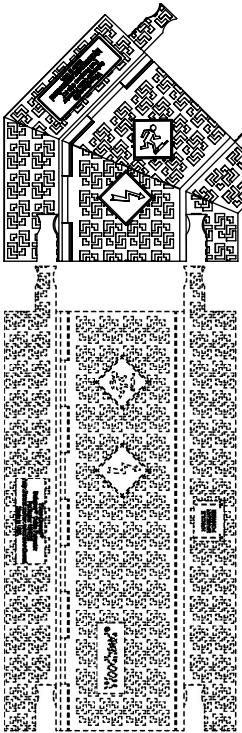
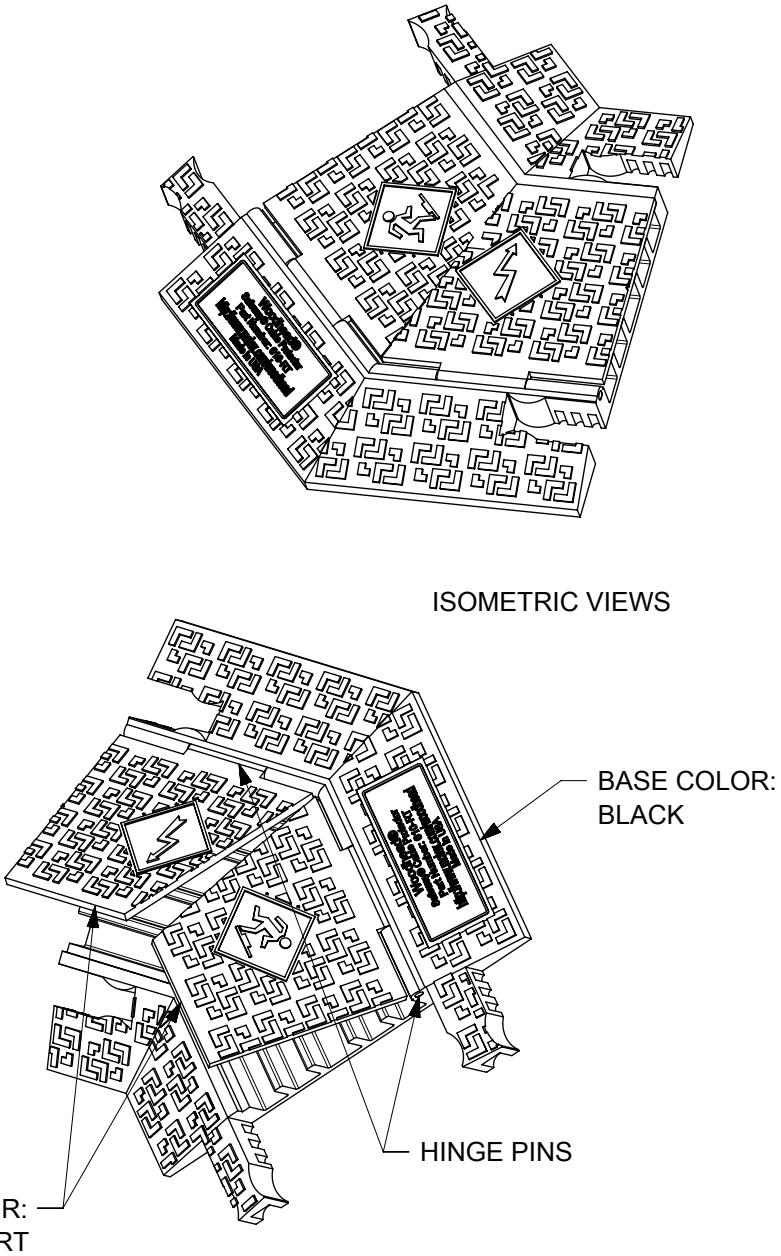


10	9	8	7	6	5	4	3	2	1
PART NUMBER	Woodhead® ENGINEERING NUMBER	LID COLOR							
1301380119	610-RT	SAFETY ORANGE (PER ANSI Z535.1-2006)							
1301380189	610-RT-BLK	BLACK							

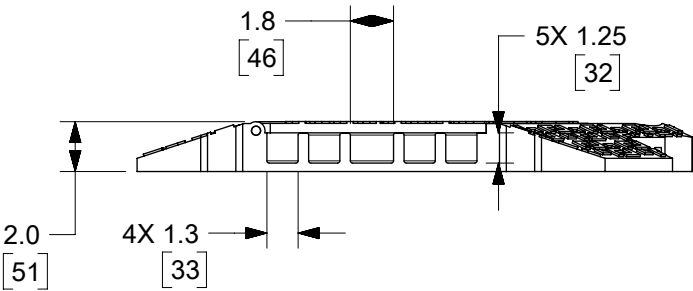

RightTurn:
Each right turn piece allows a 45° change in direction of the cable run. Turn pieces connect directly to the end of the cable protectors. Multiple right turns may be used in combination to produce a 90° or greater change in direction of the cable run.

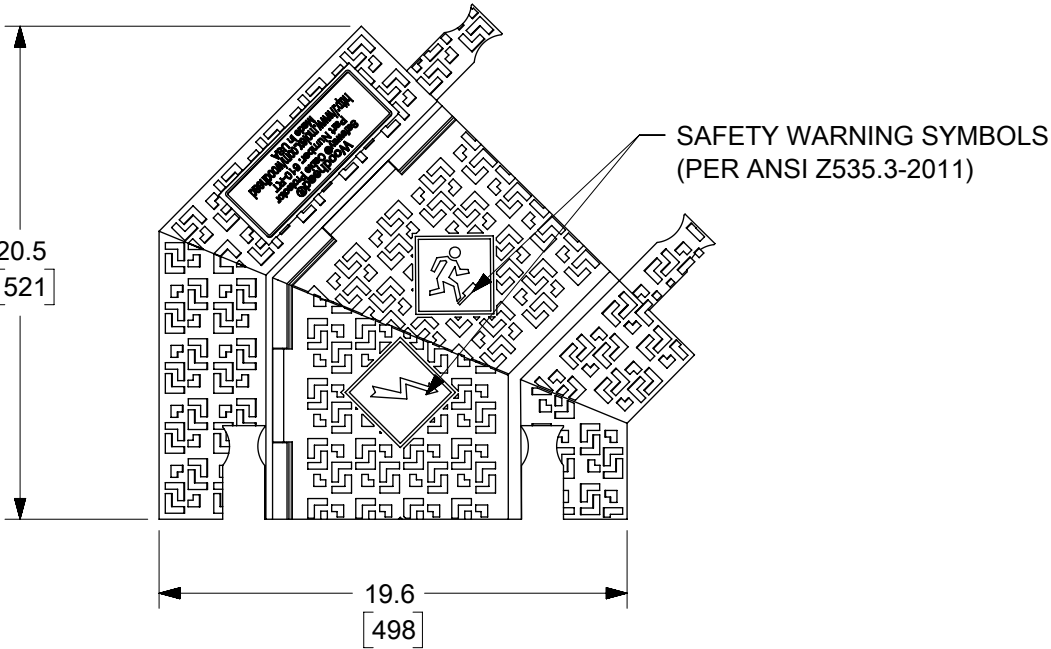

PENDING APPROVAL

- NOTES:
- 1) MATERIAL:
BASE/LID: HEAVY-DUTY, NON-CONDUCTIVE POLYURETHANE, UV STABILIZED
HINGE PIN: REINFORCED FIBERGLASS
 - 2) WEIGHT: 15.5 LBS/ 7 KG ±10%
 - 3) LOAD CAPACITY PER TIRE/AXLE: 16,300 LBS PER TIRE/32,600 LBS PER AXLE AT 70°F
 - 4) OPERATING TEMPERATURE: -40°F TO 120°F (-40°C TO 48°C)
 - 5) ENGINEERING NO.: SEE CHART
 - 6) ROHS COMPLIANT

DOCUMENT STATUS	RQ	RELEASE DATE	
-----------------	----	--------------	--

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE		CURRENT REV DESC: UPDATE NOTE 2			molex 5 CHANNEL 45° RIGHT TURN SAFEWAY® CABLE PROTECTOR					
INCH		1:8										
GENERAL TOLERANCES (UNLESS SPECIFIED)												
ANGULAR TOL ± 3.0 °				EC NO: 174322			PRODUCT CUSTOMER DRAWING					
4 PLACES		± 0.25		DRWN: WLEUNG 2018/03/26								
3 PLACES		± 0.25		CHK'D: DNGUYEN62 2018/04/02								
2 PLACES		± 0.25		APPR:			DOCUMENT NUMBER 1301380119					
1 PLACE		± 0.25		INITIAL REVISION:						DOC TYPE	DOC PART	REVISION
0 PLACES		± 0.25		DRWN: WLEUNG 2016/04/18						PSD	000	D
APPR: BWOODMAN 2016/04/28												
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER	SHEET NUMBER	
				B-SIZE		130138		SEE CHART		1 OF 1		