THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PRODUCT WORKS WITH PANDUIT PART NUMBERS:	APPLICATION SURFACE:	WEIGHT lbs / 10 (g) / pcs.
JMSBCB87-3-_	JMJH2 JMOD CABLE SUPPORT	BEAMS UP TO 0.75" (19.05mm) THICK	7.34 (3329)

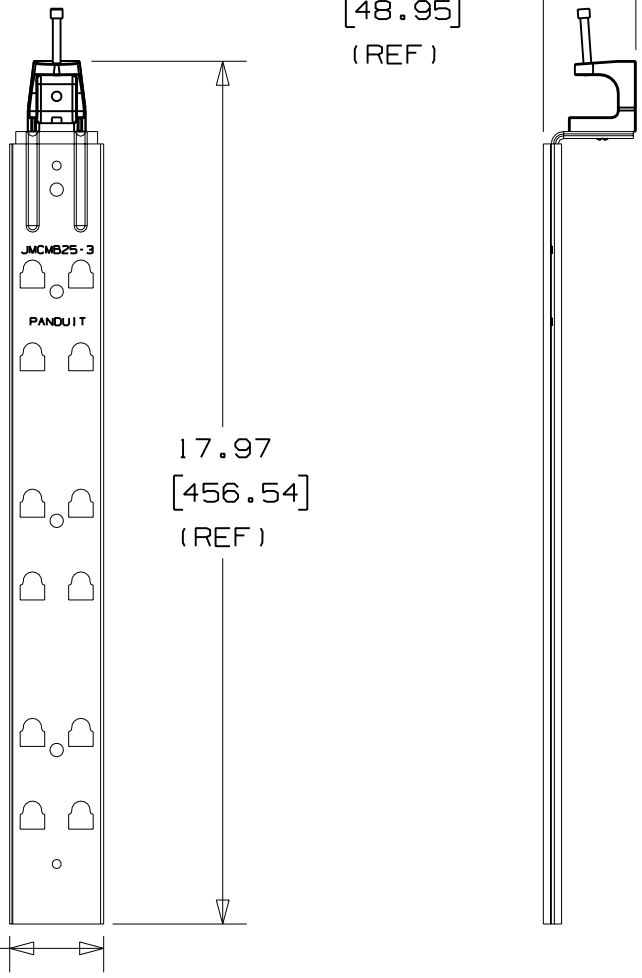

NOTES:
1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. SCREW USED TO ATTACH THE BEAM CLAMP TO THE METAL BRACKET CAN BE LOOSENED ALLOWING USER TO VARY INSTALLED ANGLE. AFTER BEAM CLAMP HAS BEEN ROTATED TO THE DESIRED ANGLE, USER SHOULD RE-TIGHTEN THE SCREW.
3. ASSEMBLY COMPONENT MATERIALS:
   A. PRE-GLAVANIZED STEEL (JMCMB25-1)
   B. ZINC PLATED STEEL (BOLT)
   C. MALLEABLE IRON (BEAM CLAMP)
4. RATED STATIC LOAD:
   180 lbs. (81.65kg)
5. JMSBCB87-3 WILL ACCEPT UP TO SIX JMJH2 J HOOK PRODUCTS.

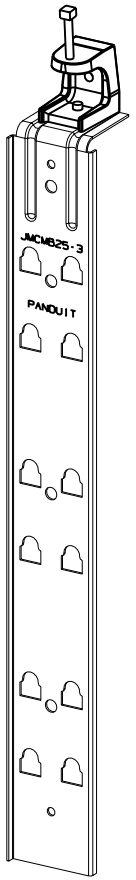

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS: G02672DV_PS_JMSBCB873_01

PANDUIT CORP. TINLEY PARK, ILLINOIS

JMOD BEAM CLAMP BRACKET ASSEMBLY (JMSBCB87-3-_)

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 [1.3] (.XXX) ±0.010 [0.25]
(.XX) ±0.02 [0.5] ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: JAD
DATE: 3/7/03
CHK'D:
MAT'L: SEE NOTE 3
SCALE: NONE
DRAWING NO.: GB2672DV
DWG: A
SIZE

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP
1	2/20/06	JAD		UPDATE APPLICATION SURFACE CALLOUT, WAS .88"	GB2722DV 1		