






REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2020/05/16



RECOMMENDED PANEL Cut-Out




Panel T:Max 2.2

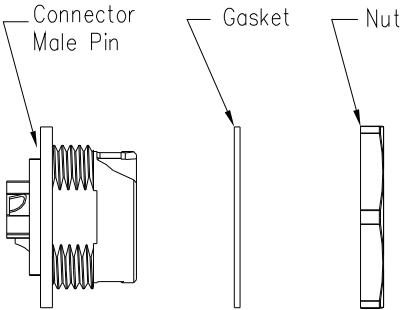

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance:100MΩ at DC500V.
 - 3.Contact Resistance:<10mΩ.
 - 4.Withstand Voltage: 2000V AC
 - 5.Operating Current:20A
 - 6.Operating Voltage:AC 300V
 - 7.Waterproof Rate:IP67 (Mated)
 - 8.Housing:Nylon, Black
 - 9.Female Pin:Copper Alloy, Gold Plated
 - 10.Gasket:Silicon Gray
 - 11.Panel Nut:Nylon, Blue
 - 12.Torque Rate:0.8~1.0N・m
 - 13.RoHS Compliant.
 - 14.Mating Cap P/N:806-00058-00


22XXX635-01

Pin Number



2 Pin

P/N: 24002635-01




3 Pin

P/N: 24003635-01

Pin Assignments Front View

UNIT:mm



DESCRIPTION

Large Series Push Lock Female socket With Female Pin

TOLERANCE

.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°

SCALE

1:1

SHEET

1 OF 1

REV.

C1

SIZE

A4

* :Inspection Item

CHOGORI®

PART NO

24XXX635-01

DRAWN BY

Liu

DATE

2020/05/16

DWG NO

CHECKED BY

Mo

DATE

2020/05/16

CUSTOMER

APPROVED BY

Adley

DATE

2020/05/16

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDICTION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.