

CT4200 Series

Passive Voltage Oscilloscope Probes


Datasheet

Overview:

The CT4200 Series of high impedance, passive voltage oscilloscope probes are designed for use with most general-purpose oscilloscopes. Their miniature 2.5 mm size provides easy probing of today's high density circuits. The series includes 1x, 10x, 20x, and 100x attenuation ratio models interfacing with scopes having either 1 M Ω or 50 Ω input impedances. Bandwidths range from 55 MHz up to 1.5 GHz. Each probe comes complete with a full range of performance accessories.

Features:

- 55 MHz to 1.5 GHz bandwidth
- 8.5 V to 400 V Max Input Voltage (DC + AC peak)
- 1x to 100x Attenuation
- Low and High Frequency Compensation
- Meets IEC 61010-031:2015 safety standard

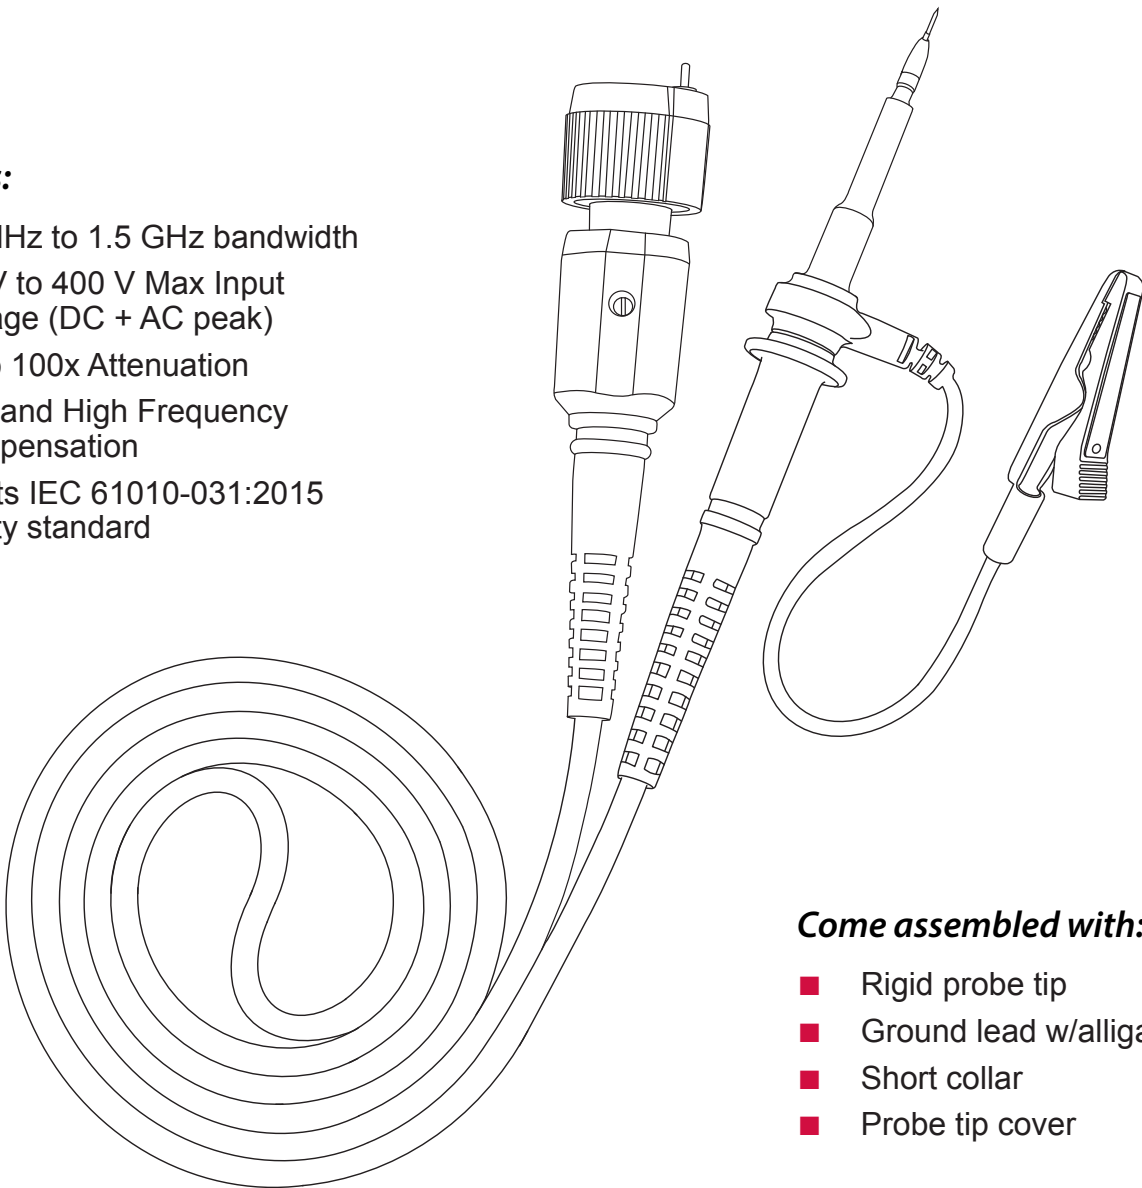

Come assembled with:

- Rigid probe tip
- Ground lead w/alligator clip
- Short collar
- Probe tip cover

Specifications

All specifications apply to the unit after a temperature stabilization time of 20 minutes over an ambient temperature range of 25 °C ± 5 °C.

| Model | Attn. | Input Impedance | | B/W | Rise Time | Max Input Voltage (AC RMS) | Scope Input | Comp.range |
|---------------------|-------|-----------------|--------|---------|-----------|---|-------------|----------------|
| | | R | C | | | | | |
| CT4200 | 1x | 1 MΩ | 39 pF | 55 MHz | 6.36 ns | 55 V CAT II ^b | 1 MΩ | - ^e |
| CT4201 | 10x | 10 MΩ | 10 pF | 200 MHz | 1.75 ns | 400 V CAT (0) ^a 300 V CAT II ^b | 1 MΩ | 10-25 pF |
| CT4202 | 10x | 10 MΩ | 10 pF | 350 MHz | 1.0 ns | 400 V CAT (0) ^a 300 V CAT II ^b | 1 MΩ | 10-25 pF |
| CT4203 | 10x | 10 MΩ | 10 pF | 500 MHz | 0.7 ns | 400 V CAT (0) ^a 300 V CAT II ^b | 1 MΩ | 10-25 pF |
| CT4204 | 10x | 500 Ω | 1.8 pF | 1.5 GHz | 0.24 ns | 8.5 V CAT (0) ^c | 50 Ω | - |
| CT4205 | 20x | 20 MΩ | 7.6 pF | 500 MHz | 0.7 ns | 400 V CAT (0) ^a 300 V CAT II ^b | 1 MΩ | 7-25 pF |
| CT4206 | 100x | 5 kΩ | 2.2 pF | 1.5 GHz | 0.24 ns | 21 V CAT (0) ^c | 50 Ω | - |
| CT4207 ^d | 10x | 10 MΩ | 10 pF | 700 MHz | 0.5 ns | 400 V CAT (0) ^a 300 V CAT II ^b | 1 MΩ | 10-25 pF |

a: Without a Measurement Category; 1250 V transient overvoltage

b: Measurement Category II

c: Without a Measurement Category; 0 V transient overvoltage

d: This probe is specifically designed to operate with the Keysight InfiniiVision* X Series oscilloscopes with 1 MΩ impedance

e: This probe is designed to work with oscilloscopes with an input capacitance around 15 pF

*Keysight and InfiniiVision are trademarks of Keysight Technologies, inc.

Mechanical Characteristics

| | |
|--------|--------|
| Weight | 250 g |
| Length | 100 cm |

Safety Specifications

IEC 61010-031:2015

Specifications are subject to change without notice. To ensure the most current version of this manual, please download the current version from our website: caltestelectronics.com


Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com



Accessories

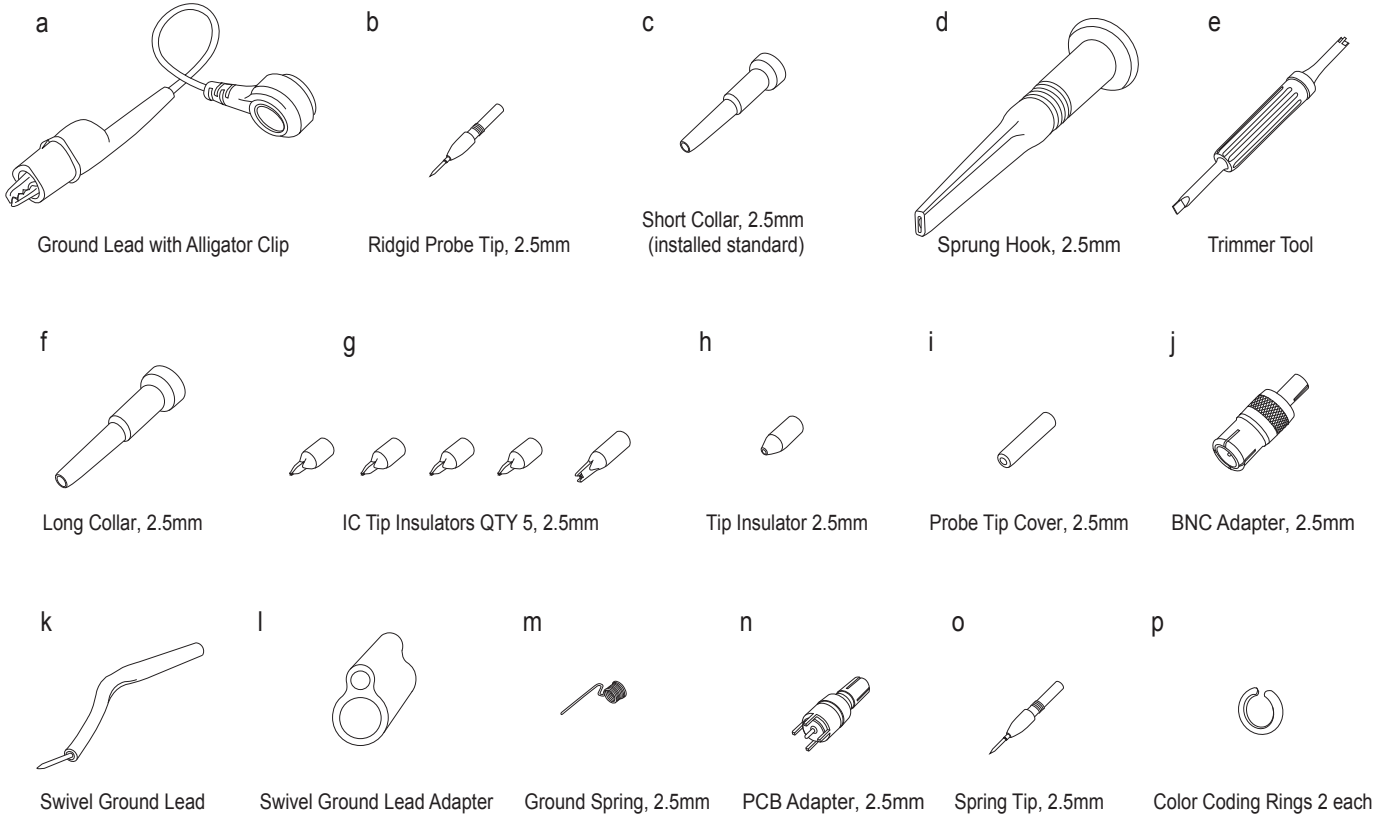

| Item | CT Part # | Description | Quantity | CT4200 CT4204 CT4206 | CT4201 CT 4202 CT4203 CT4205 CT4207 |
|------|-------------|--|----------|----------------------------|---|
| a | CT4208-10-8 | Ground Lead w/ Alligator Clip | 1 | ✓ | ✓ |
| b | CT4209-0 | Rigid Probe Tip | 2 | ✓ | ✓ |
| c | CT4208-8 | Short Collar, 2.5 mm | 1 | ✓ | ✓ |
| d | CT4211-8 | Sprung Hook, 2.5 mm | 1 | ✓ | ✓ |
| e | CT4212 | Trimmer Tool | 1 | - | ✓ |
| f | CT4213-8 | Long Collar, 2.5 mm | 1 | ✓ | ✓ |
| g | CT4214 | IC Tip Insulators, 2.5 mm | 5 | ✓ | ✓ |
| h | CT4215-0 | Tip insulator, 2.5 mm | 1 | ✓ | ✓ |
| i | CT4216-8 | Probe Tip Cover, 2.5 mm | 1 | ✓ | ✓ |
| j | CT4217 | BNC Adapter, 2.5 mm | 1 | ✓ | ✓ |
| k | CT3649 | Swivel Ground Lead | 1 | ✓ | ✓ |
| l | CT4218-8 | Swivel Ground Lead Adapter | 1 | ✓ | ✓ |
| m | CT4219 | Ground Spring, 2.5 mm | 1 | ✓ | ✓ |
| n | CT4220 | PCB Adapter, 2.5 mm | 1 | ✓ | ✓ |
| o | CT4221-0 | Spring Tip, 2.5 mm | 1 | ✓ | ✓ |
| p | CT4222 | Color Coding Rings (Blue, Green, Red, Yellow) | 2 each | ✓ | ✓ |

Technical data subject to change.

© Cal Test Electronics 2018.

caltestelectronics.com



Performance Data Plots

