


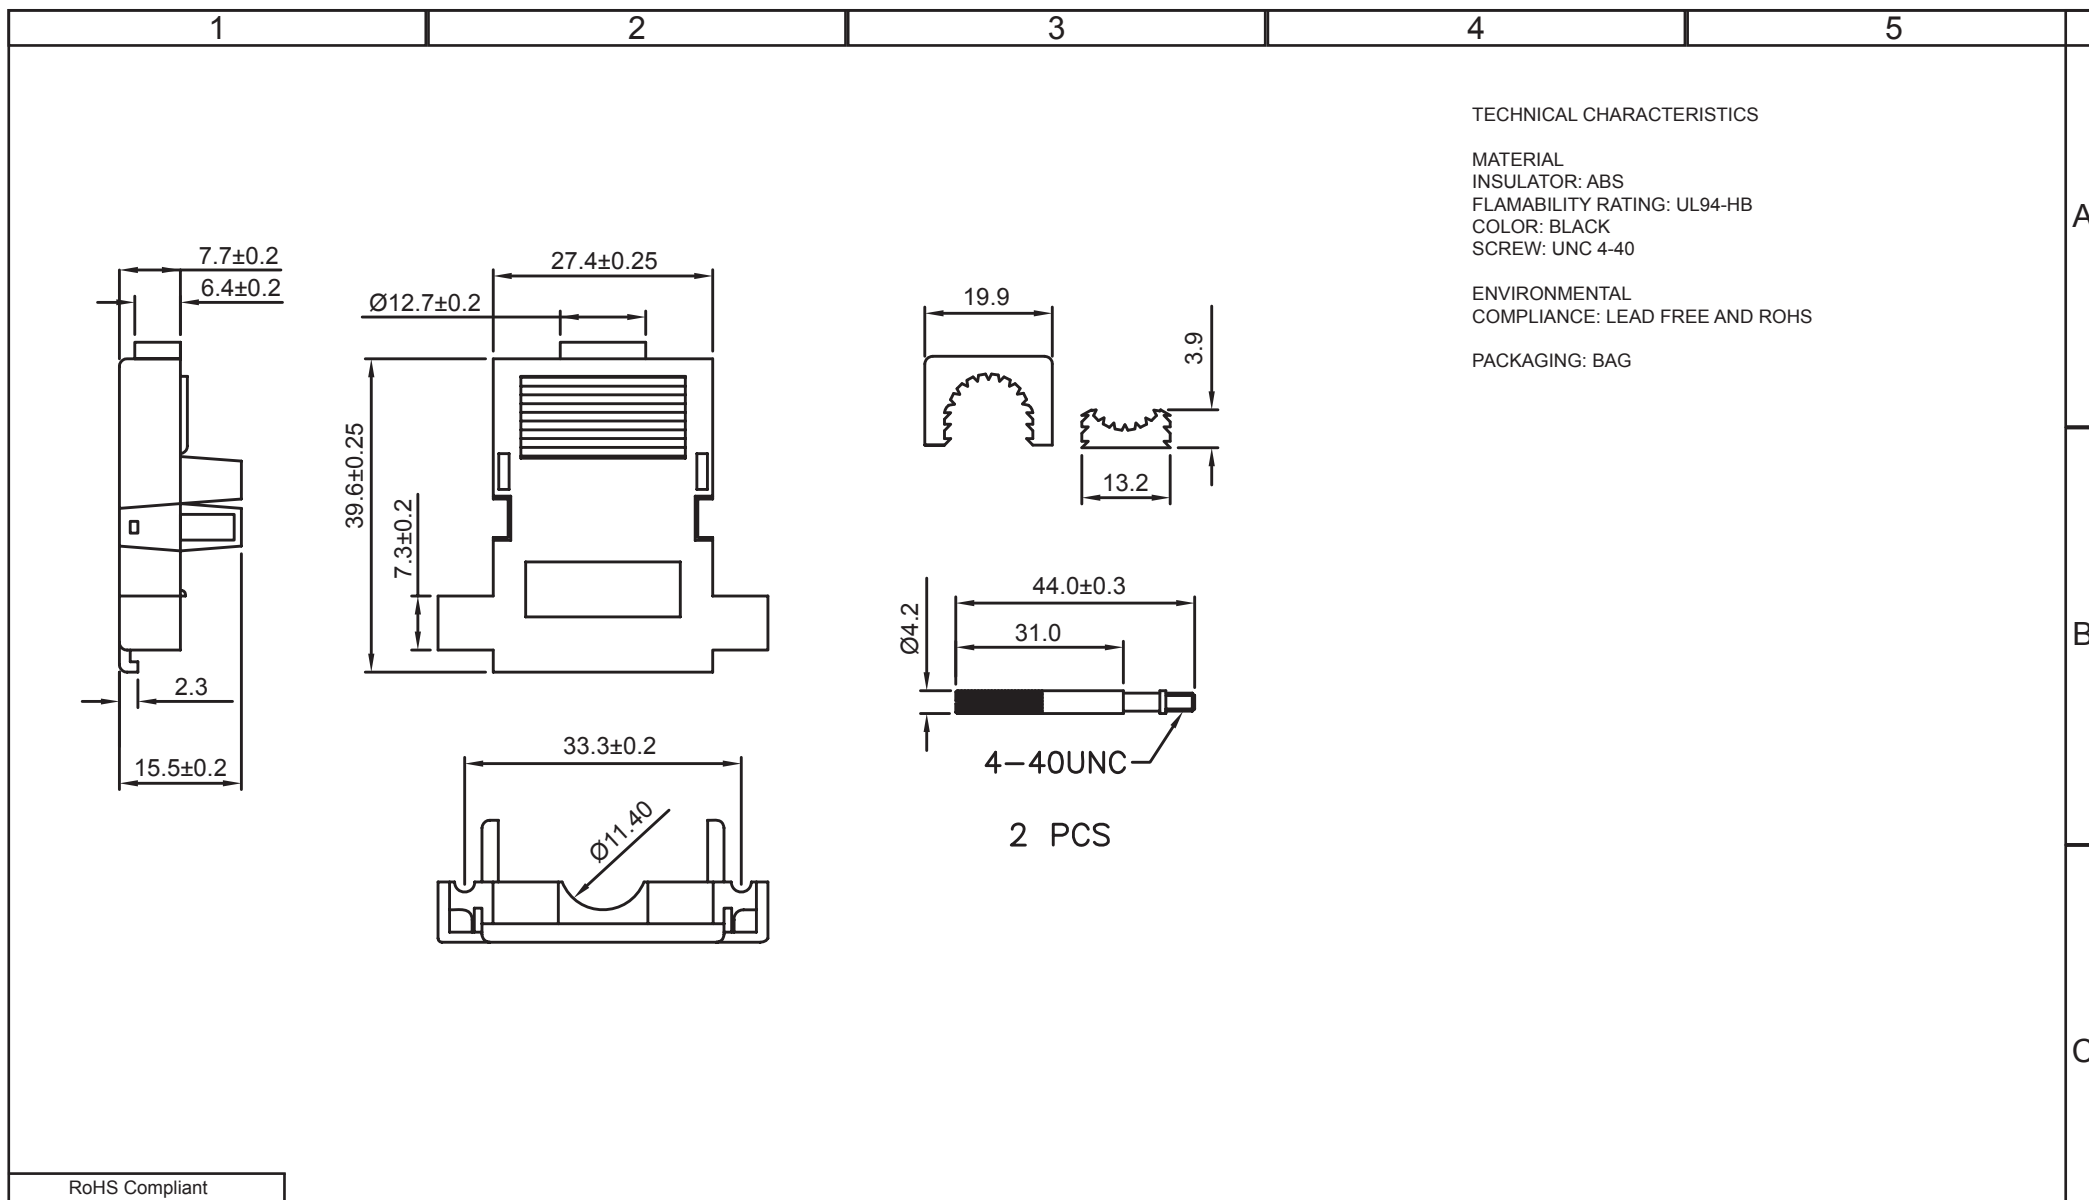


TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: ABS
FLAMABILITY RATING: UL94-HB
COLOR: BLACK
SCREW: UNC 4-40

ENVIRONMENTAL
COMPLIANCE: LEAD FREE AND ROHS

PACKAGING: BAG

RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = $\pm$ 0.2</div> <div>.XX = $\pm$ 0.15</div>	<div><div>WÜRTH ELEKTRONIK</div></div>				
G	17-NOV-14	PACKAGING	AS			<div>APPROVAL: NPr</div>	UNIT: MM	DESCRIPTION: WR-DSUB - PLASTIC HOOD SMALL TOP ENTRY 4640 SCREW		SIZE A4
F	25-SEP-14	DRAWING+VIEWS	AS				SCALE:			
E	09-APR-13	MEASURE	AR				SHEET: 1/3	WERI PART NO: 618 015 214 622		
D	20-MAR-13	FLAMABILITY	AR				DRAW: AS			
C	12-NOV-08	CHARACTERISTICS	JP							
B	31-MAR-04									
A	24-AUG-01	PDF	JP							
REV	DATE	FILE	BY							

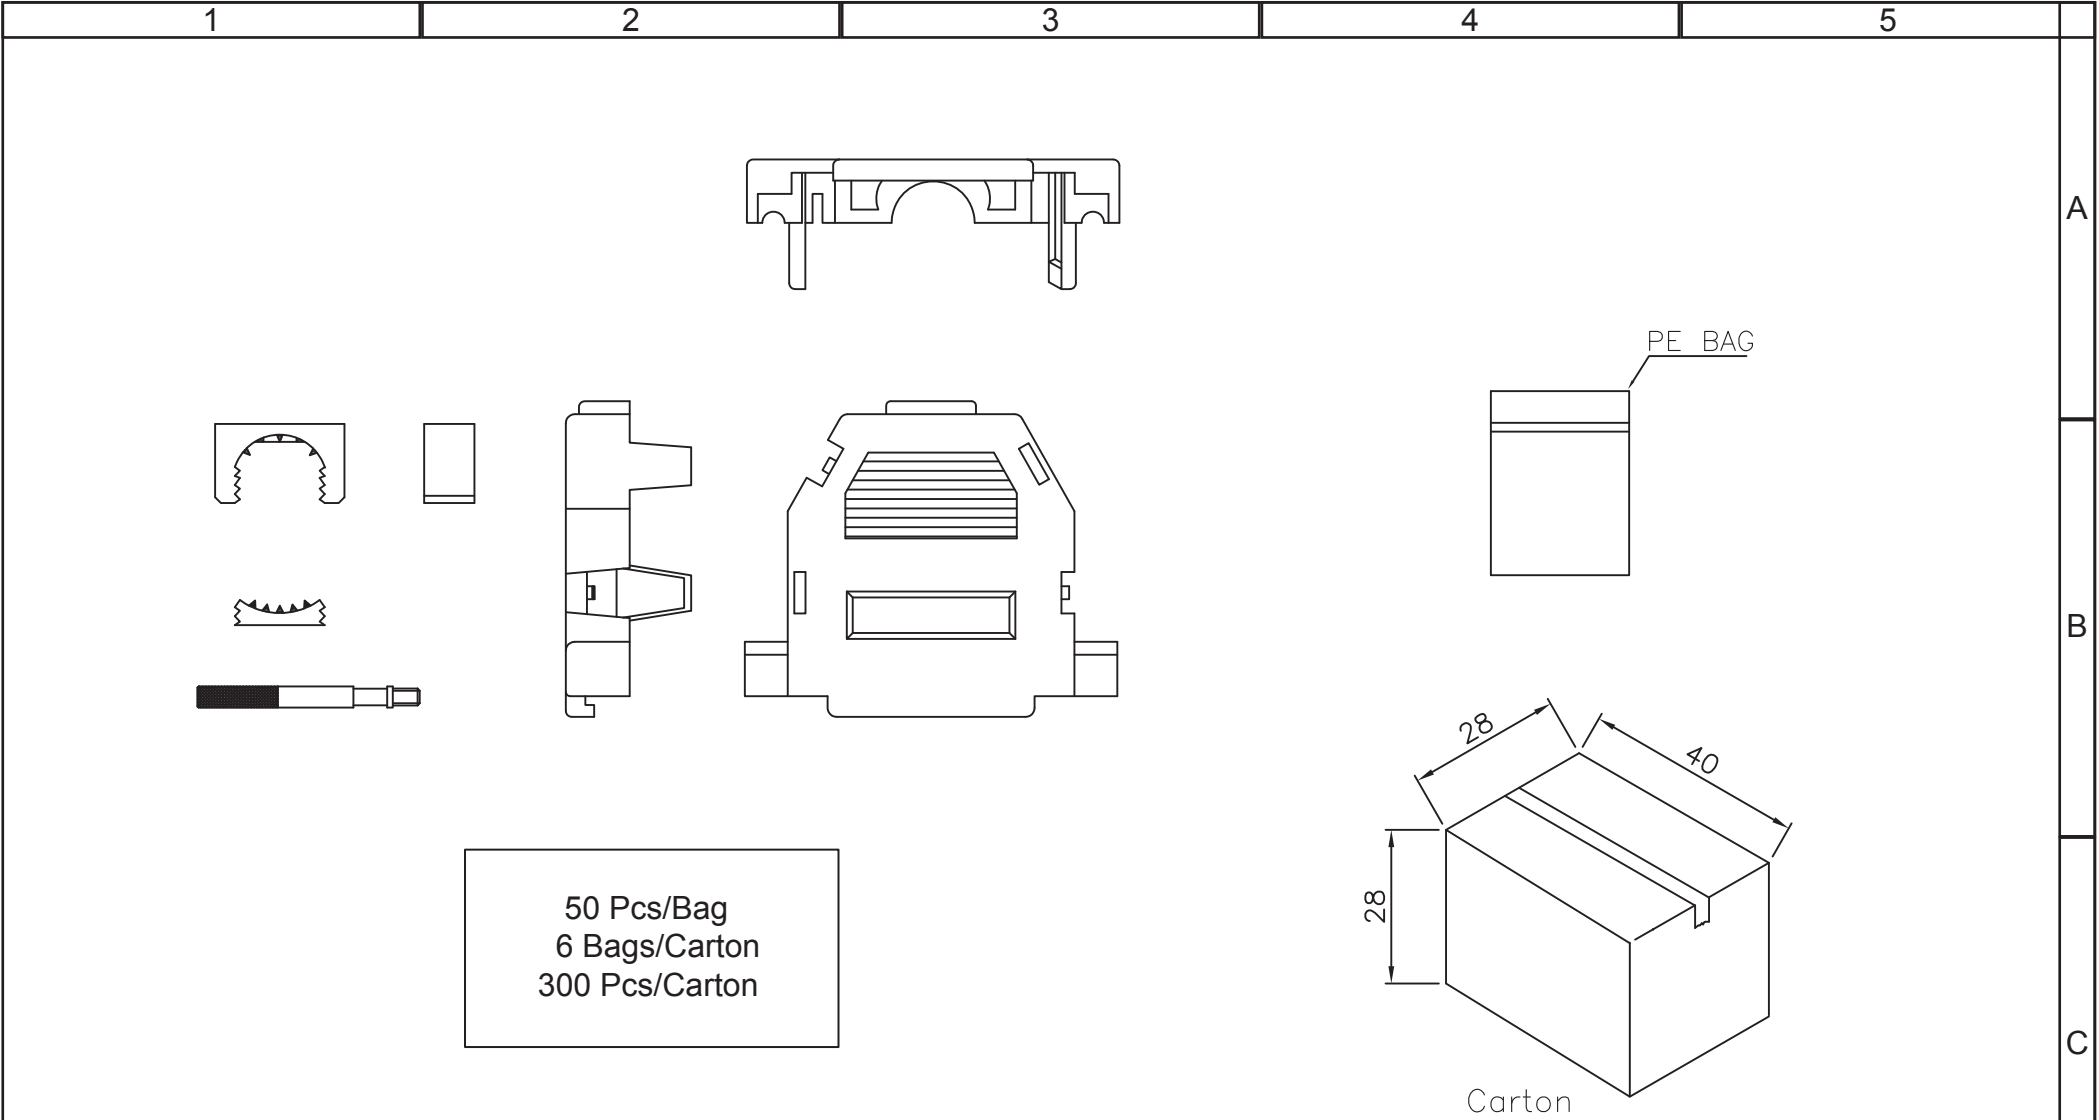

RoHS Compliant				<div>PROJECTION:</div> <div></div>	<div>GENERAL TOLERANCE</div> <div>.X = +/- 0.2</div> <div>.XX = +/- 0.15</div>	<div></div>		
G								
F								
E								
D								
C				APPROVAL: NPr	UNIT: MM	DESCRIPTION: WR-DSUB - PLASTIC HOOD SMALL TOP ENTRY 4640 SCREW		SIZE
B					SCALE:			
A	17-NOV-14	PDF	AS		SHEET: 2/3	WERI PART NO: 618 015 214 622		
REV	DATE	FILE	BY		DRAW: AS			

D

A4

[illegible]