

APPROVED: _____


DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/28/14	
A		UPDATE SPEC.	8/7/20	AY/EY

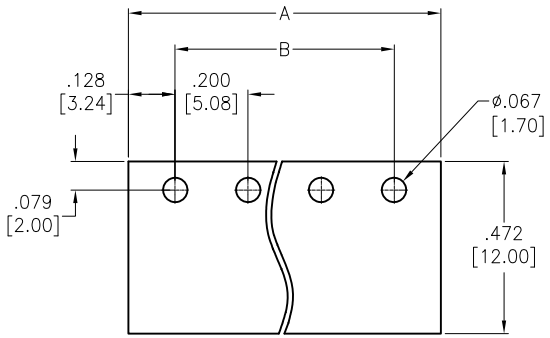


RECOMMENDED PCB LAYOUT

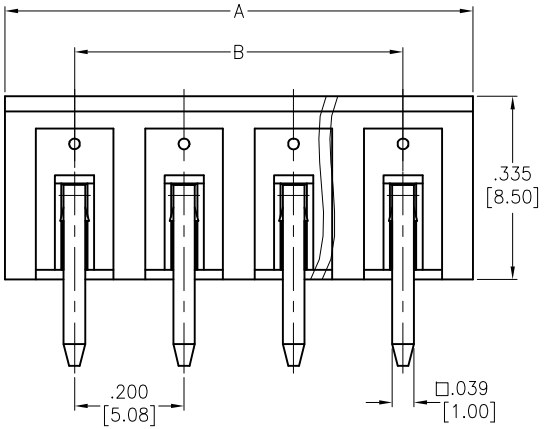

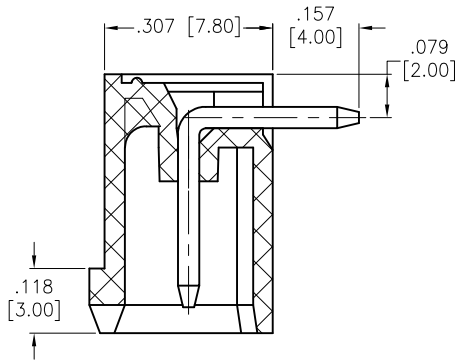

SECTION A–A

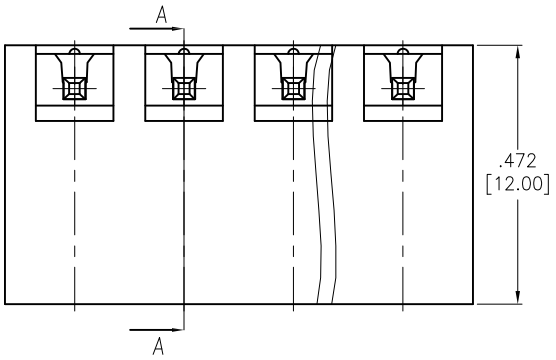

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V–0

Insulator color: Green

Contacts: Copper Alloy, Tin plated

Electrical:

Voltage rated: 300 V

Current rated: 15 A

Withstanding voltage: 1600V AC/1 Min

Temperature Rating:

Operating temperature: –40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

Positions: 02 thru 24

A = .200 [5.08] x No. of Positions+ .055 [1.40]

B = .200 [5.08] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	8/28/14
CHECKED	YC	8/28/14
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .200 [5.08] PITCH, EURO BLOCK HEADER RIGHT ANGLE, CLOSE SIDE

SIZE	PART NO.	REV.
X	EBQA-XX-D-C	A

REF: S00067C | SCALE: NTS | SHEET 1 OF 1