

APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/6/16	
A		UPDATE DRAWING	8/31/20	AY/KC

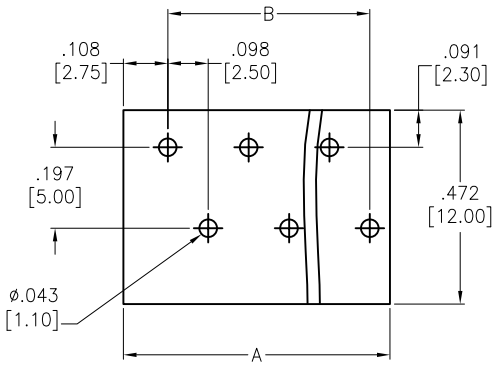

RECOMMENDED PCB LAYOUT

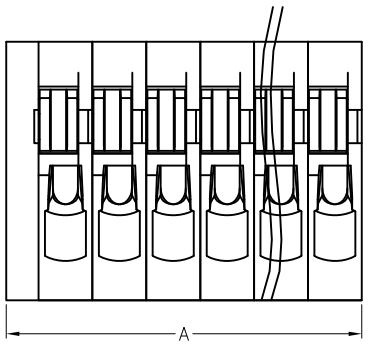

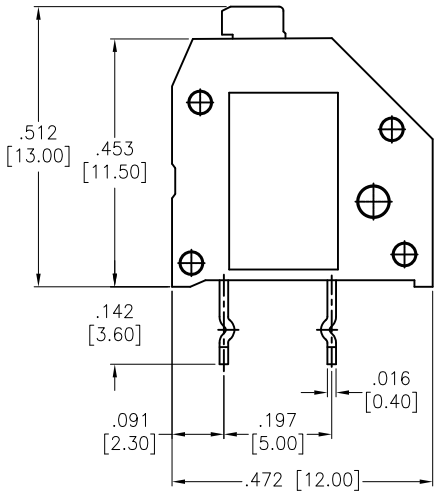

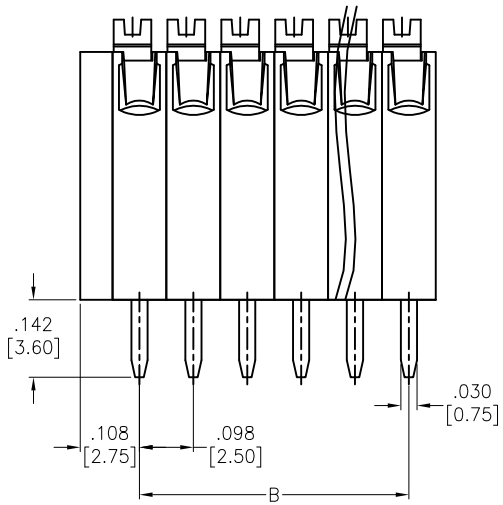

Positions: 01 thru 30

A= .098 [2.50] x No. of Positions + .059 [1.50]

B= .098 [2.50] x No. of Space

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Grey

Contact: Copper Alloy, Tin plated

Electrical:

Voltage rating: 300V

Current rating: 4A

Dielectric withstanding voltage: 1600V for 1 minute

Mechanical:

Wire range: 28~20 AWG

Strip length: 8.5~9.5 mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	7/6/16
CHECKED	YC	7/6/16
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

EURO BLOCK, .098 [2.50] PITCH,WITH END COVER
DOUBLE ROW CENTER CONTACT LINK

SIZE	PART NO.	REV.
X	EB59A-XX-V	A

REF:	SCALE:	SHEET
S00067C	NTS	1 OF 1