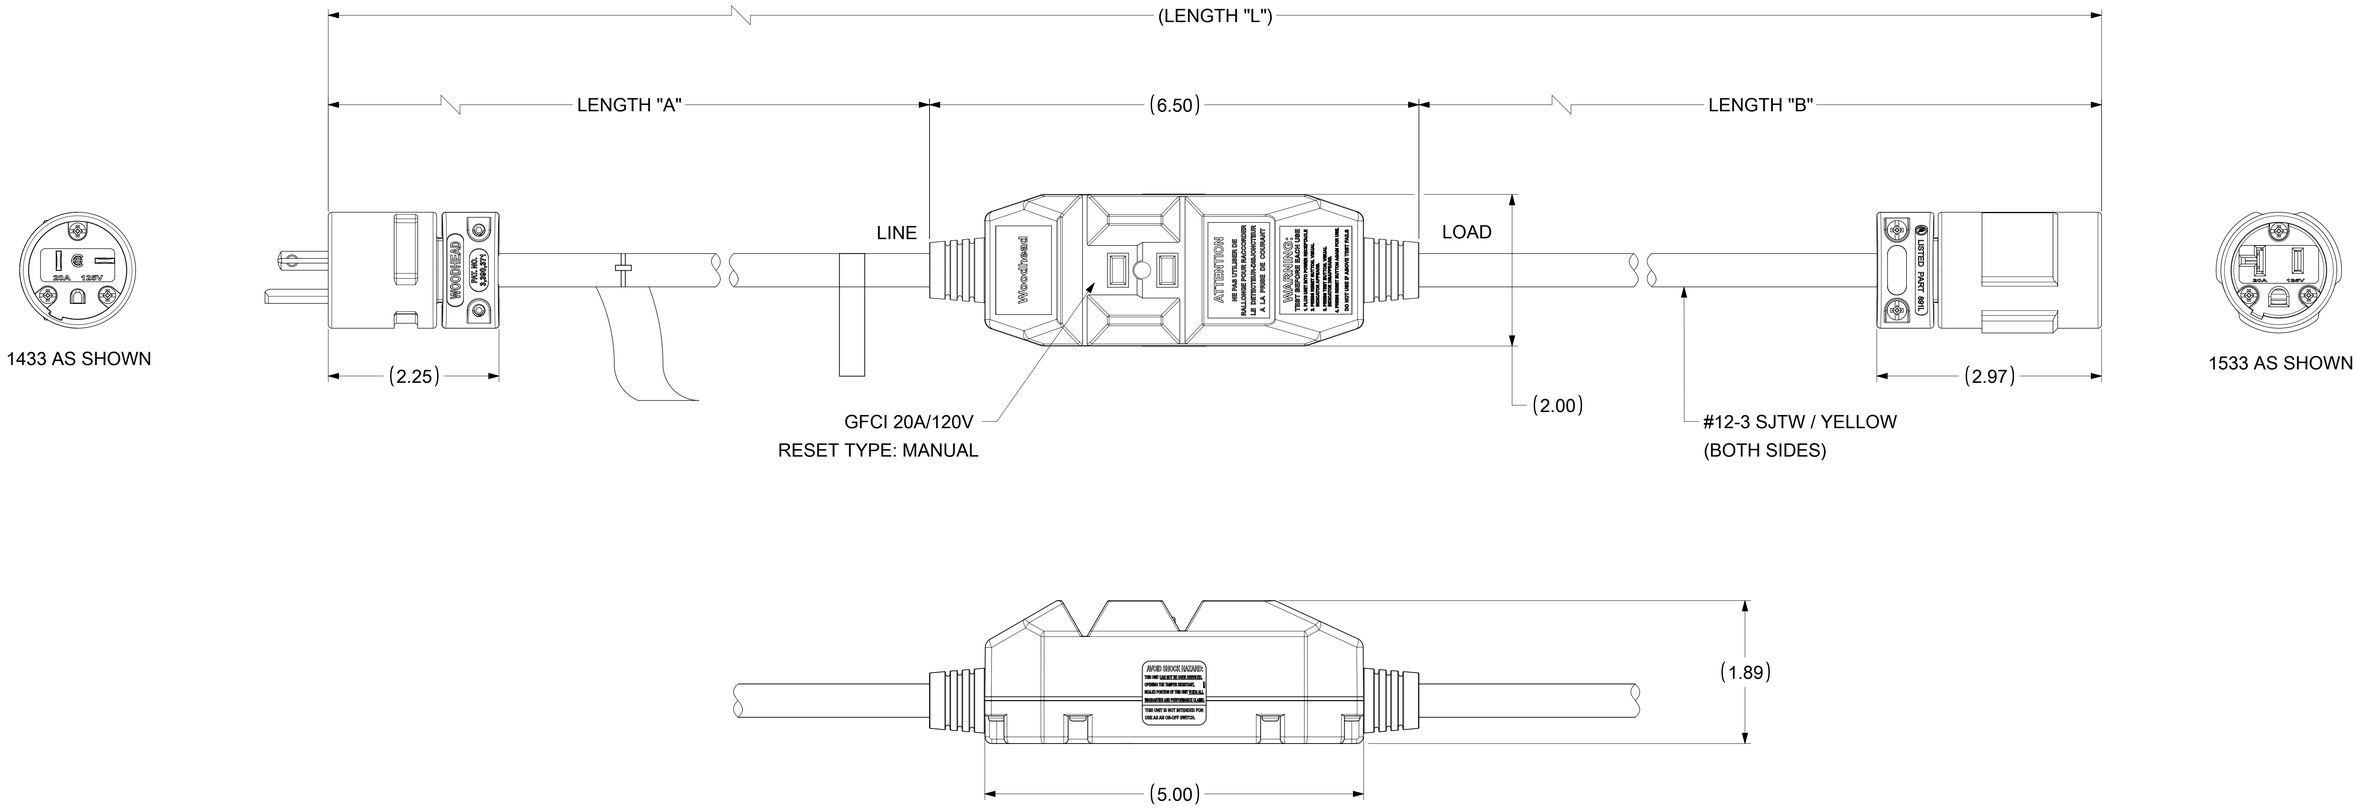


TECHNICAL

LISTED:	UL & CSA
RATED SUPPLY VOLTAGE:	120VAC
RATED CURRENT:	UP TO 20 AMPS
RESET TYPE:	MANUAL
OPERATING FREQUENCY:	60 Hz
TYPE:	CLASS A
GROUND TRIP CURRENT:	4-6 mA
OVERLOAD CURRENT:	120 AMP 125 VAC
INSULATION VOLTAGE:	1,500 VRMS - 1 MINUTE
ENDURANCE OPERATIONS:	3000 OPERATIONS
GFCI ENCLOSURE:	NEMA 3R

MATERIAL NUMBER	ENGINEERING NUMBER	LENGTH "A"	LENGTH "B"	LENGTH "L"	PLUG	CONNECTOR
1301530259	20051-50	1 FT ± .5 IN.	49 FT ± 4 IN.	50 FT 6.5 IN ± 4.5 IN.	1433	1533

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

FUNCTIONAL SYMBOLS: FA = 0; FC = 0; FD = 0

DIVISIONAL SYMBOLS

DIMENSION UNITS	SCALE
INCH	NTS

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	± °
4 PLACES	±
3 PLACES	±
2 PLACES	±
1 PLACE	±
0 PLACES	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: NEW SALES DRAWINGS CREATED

EC NO: 679759
DRWN: PPURSUTANDEL 2021/09/20
CHK'D: PPURSUTANDEL 2021/11/22
APPR: HKNEELAND 2021/12/06

INITIAL REVISION:
DRWN: PPURSUTANDEL 2021/09/20
APPR: HKNEELAND 2021/12/06

molex

20A/120V INLINE GFCI W/ NEMA 5-20 50FT

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1301530259	PSD	000	A

THIRD ANGLE PROJECTION | DRAWING: D-SIZE | SERIES: 130153

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE TABLE	GENERAL MARKET	1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2021/12/06 21:46:48