



KYCON, Inc. 305 Digital Drive, Morgan Hill, CA 95037 (408)494-0330

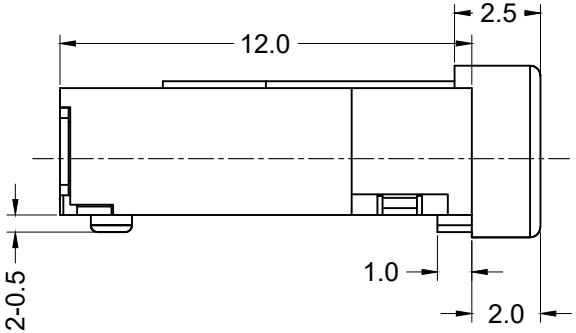


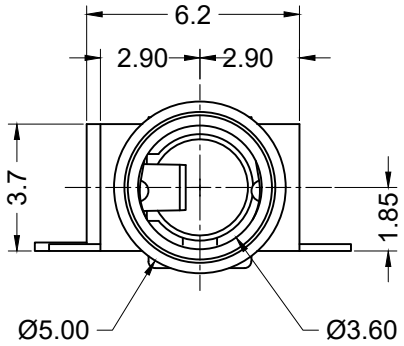

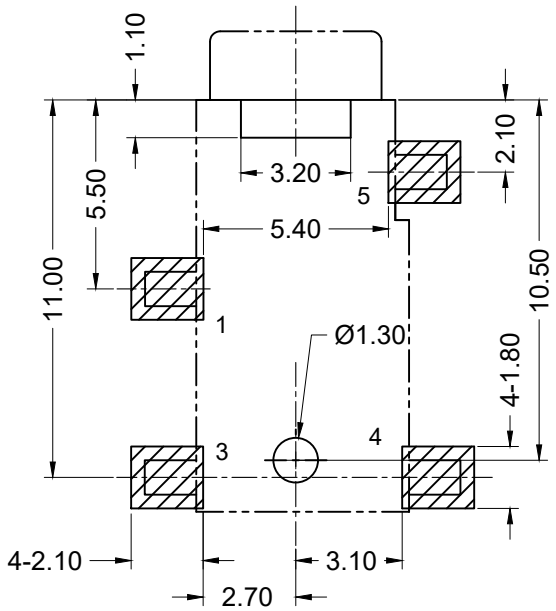


RECOMMENDED PADS LAYOUT
<TOP VIEW>

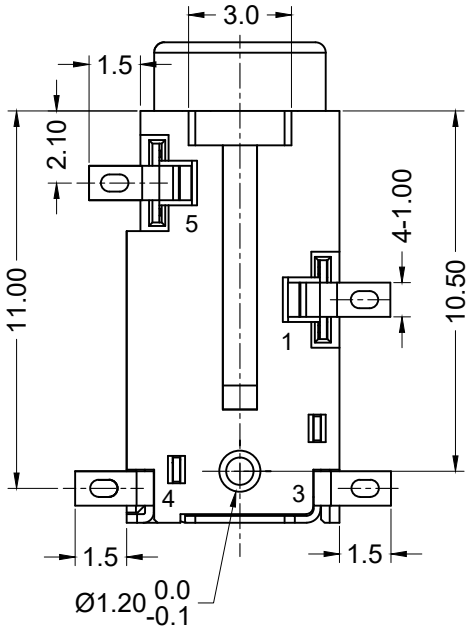



SCHEMATIC

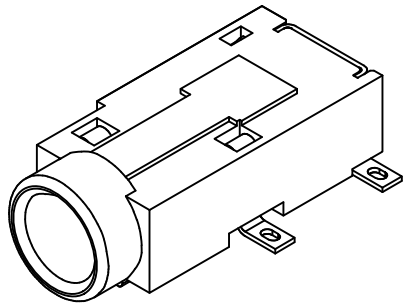

Material and Finish

Housing: High Temp Plastic

Terminals: Copper Alloy,
Gold Plated

Electrical Characteristics

Contact Resistance:
Before Test: 50 milliohms max.
After Durability Test:
100 milliohms max.

Rated Voltage: 16V DC

Rated Current: 0.3A

Insulation Resistance:
100 Megohms min.
at 500V DC

Dielectric Strength:
500V AC RMS for 1 minute

Operating Temp:
-25°C to +70°C

Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise

RoHS COMPLIANT

C US LR78160

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY
A0	01/11/08	New Drawing	WILL H.	H. MA
A1	01/28/08	Release Drawing	H. MA	N/A
A2	09/14/09	ECO #09-070	S. Vien	H. MA
A3	04/29/14	ECO #14-017	W. Cook	H. MA
A4	08/14/18	Update Address	D.Shehan	N/A

DRAWN BY	DATE
WILL H.	12/12/07
	UNITS
	mm

STX-35382-4N-TR

Ø 3.5mm Earphone Jack, Plastic Bushing

4 Position, RoHS Compliant

KYCON