

SMB FEMALE - N FEMALE STRAIGHT ADAPTER


-

R191.239.000

Série : **ADAPT**

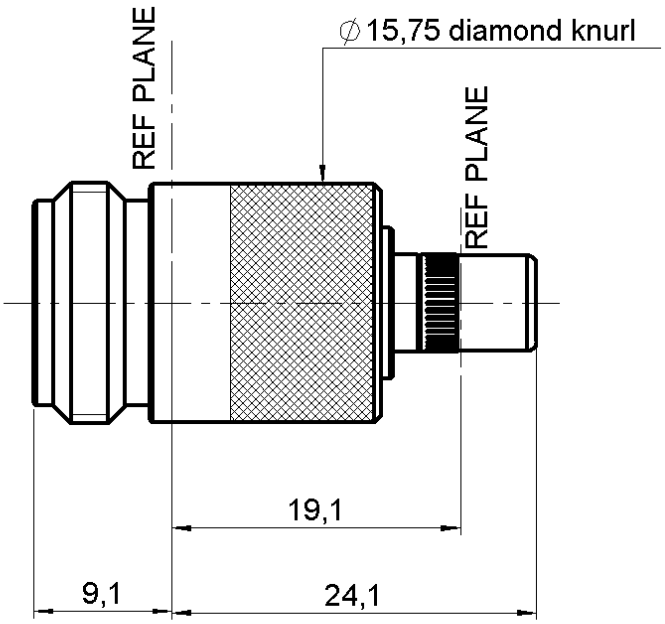



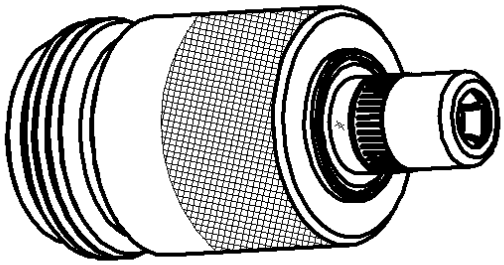

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	**BRASS**	**NICKEL 2**
CENTER CONTACT	**BERYLLIUM COPPER**	**GOLD 1.3 OVER NICKEL 2**
OUTER CONTACT	**BERYLLIUM COPPER**	**GOLD 0.5 OVER NICKEL 2**
INSULATOR	**PTFE**	
GASKET	-	
OTHERS PARTS	**BRASS**	**NICKEL 2**
-	-	-
-	-	-

Issue : 0303 N

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIALL®

SMB FEMALE - N FEMALE STRAIGHT ADAPTER

-

R191.239.000

Série : **ADAPT**

PACKAGING

Standard	Unit	Other
1	-	**Contact us**

SPECIFICATION

ELECTRICAL CHARACTERISTICS

Impedance		**50**	Ω
Frequency		**0-4**	GHz
VSWR	**1.30** +	**0.000**	x F(GHz) Maxi
Insertion loss		**0.250**	√F(GHz) dB Maxi
RF leakage	- (	**101**	- F(GHz)) dB Maxi
Voltage rating		**500**	Veff Maxi
Dielectric withstanding voltage		**1000**	Veff mini
Insulation resistance		**1000**	MΩ mini

ENVIRONMENTAL

Operating	**-55/+125**	° C
Hermetic seal	**NA**	Atm.cm3/s
Panel leakage	**NA**	

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating end		**10**	N mini
Axial force – Opposite end		**10**	N mini
Torque		**NA**	N.cm mini
Recommended torque			
Mating	**SMB**	**0**	N.cm
	N	**0**	N.cm
	-	**0**	N.cm
Panel nut		**NA**	N.cm
Mating life		**500**	Cycles mini
Weight		**30.003**	g

OTHERS CHARACTERISTICS

-

In the effort to improve our products, we reserve the rights to make changes judged to be necessary.

RADIALL®