




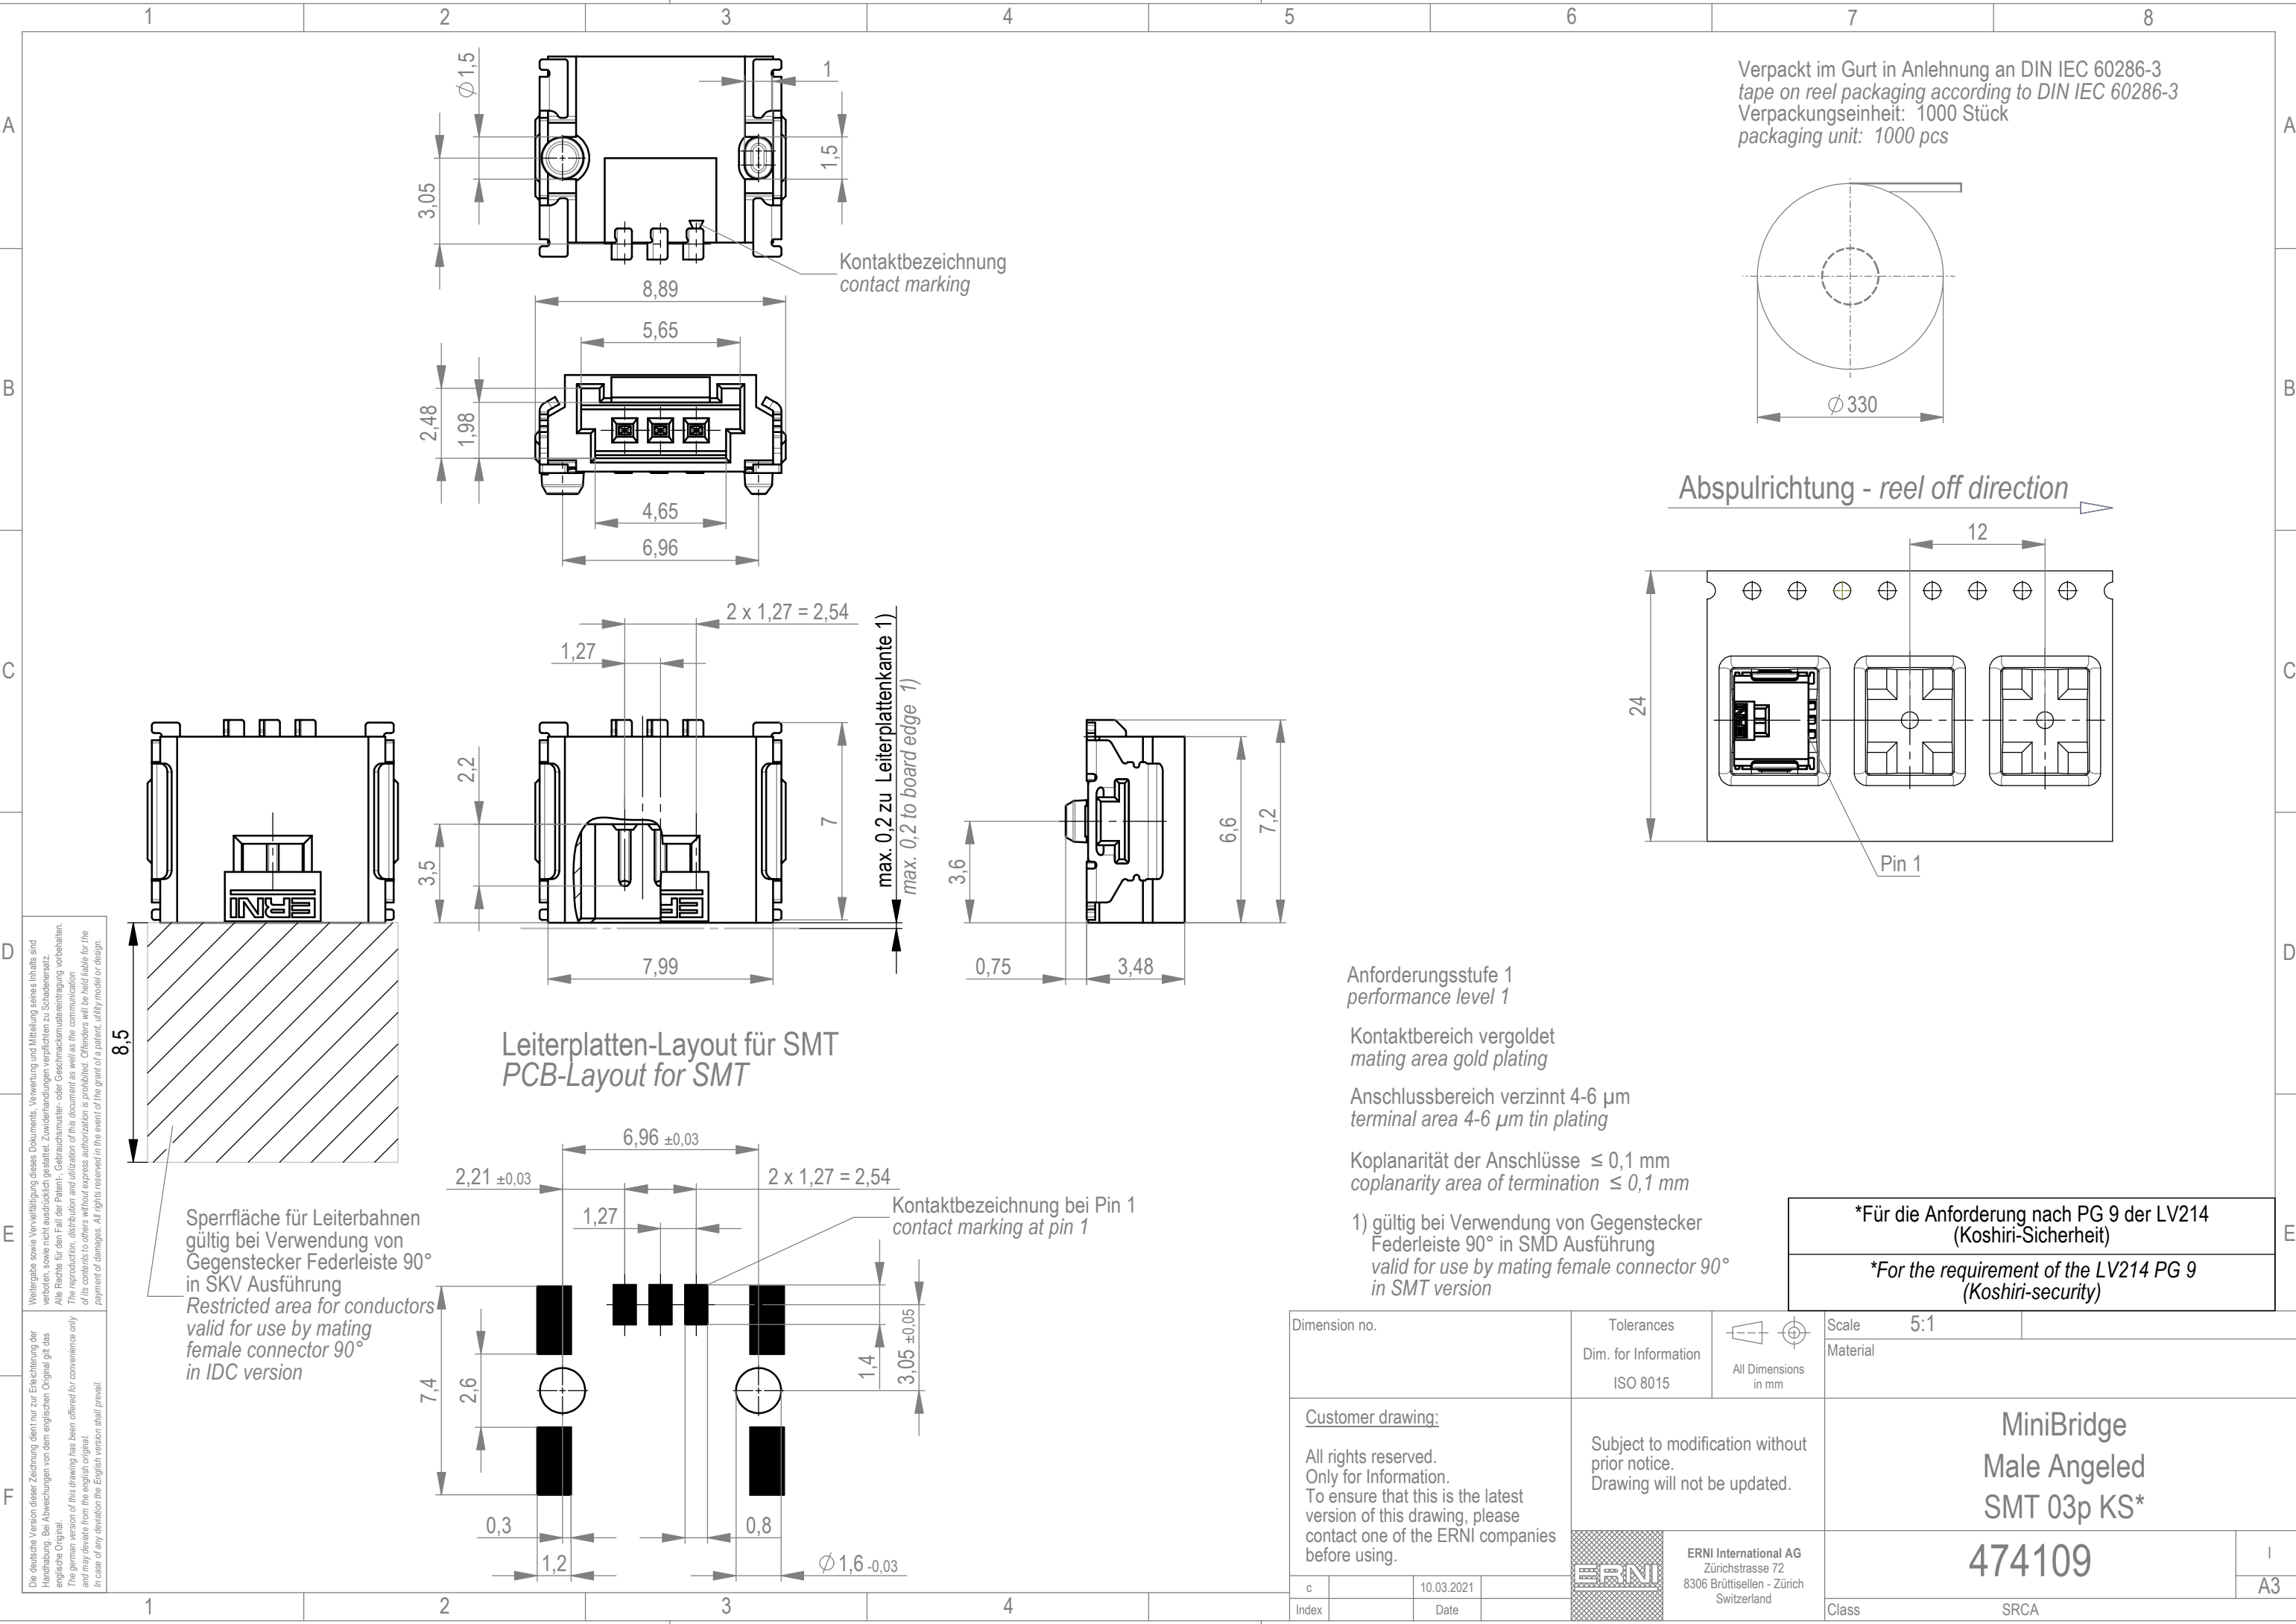

Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
tape on reel packaging according to DIN IEC 60286-3
Verpackungseinheit: 1000 Stück
packaging unit: 1000 pcs



Abspulrichtung - reel off direction

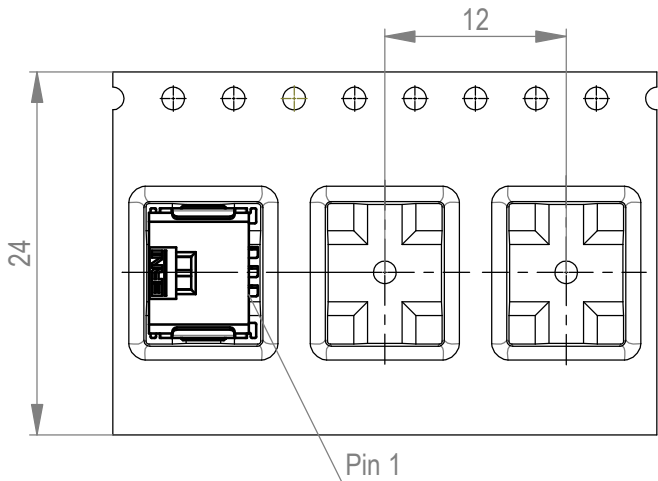

Anforderungsstufe 1
performance level 1

Kontaktbereich vergoldet
mating area gold plating

Anschlussbereich verzinkt 4-6 µm
terminal area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
coplanarity area of termination ≤ 0,1 mm

1) gültig bei Verwendung von Gegenstecker
Federleiste 90° in SMD Ausführung
valid for use by mating female connector 90°
in SMT version

*Für die Anforderung nach PG 9 der LV214
(Koshiri-Sicherheit)

*For the requirement of the LV214 PG 9
(Koshiri-security)

Dimension no.				Tolerances				Scale		5:1	
				Dim. for Information		All Dimensions in mm		Material			
				ISO 8015							
<u>Customer drawing:</u>				Subject to modification without prior notice. Drawing will not be updated.				MiniBridge Male Angeled SMT 03p KS*			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.											
c			10.03.2021			ERNI International AG Zürichstrasse 72 8306 Brüttisellen - Zürich Switzerland		474109		I	
Index			Date							A3	
								Class		SRCA	