


- NOTES:
1. ELECTRICAL:
 - VOLTAGE RATING PER IEC 60664: 300V
 - VOLTAGE RATING PER UL: 300V
 - CURRENT: 8A
 2. TEMP RATING: -25° TO +60°C
 3. PROTECTION: IP67 (WHEN MATED)
 4. COUPLING THREAD" 7/8-16
 5. AGENCY:
 - UL RECOGNIZED, FILE: E152210
 - CSA CERTIFICATION FILE: LR6837
 - 6 ALL DIMS ARE FOR REFERENCE UNLES NOTED OTHERWISE
 7. PART NUMBERS WITH "H" HAVE TWO ID MARKERS ONE ON EACH END

WIRING DIAGRAM

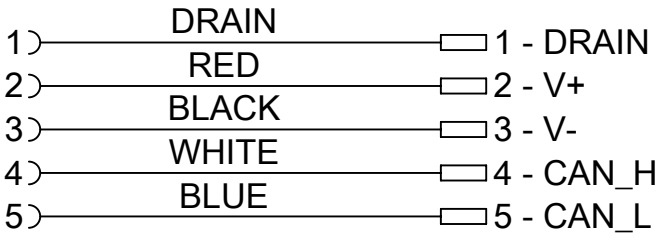




PART No. MATRIX

DN11A-XXXXX

Units:
M = Meter
T= over
100 Meter


Length
Examples:
005 = 0.5 m
010 = 1 m
050 = 5 m
100 = 10 m
150 = 15 m

OPTIONAL:
H= ID CARRIER

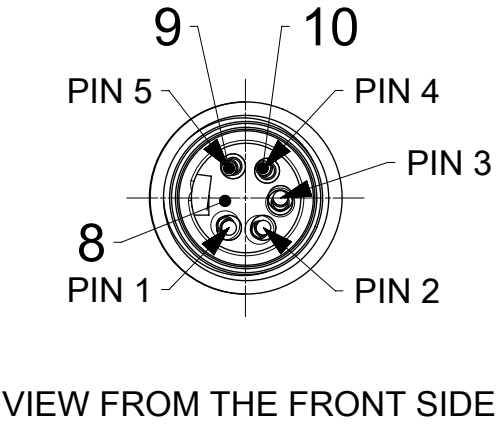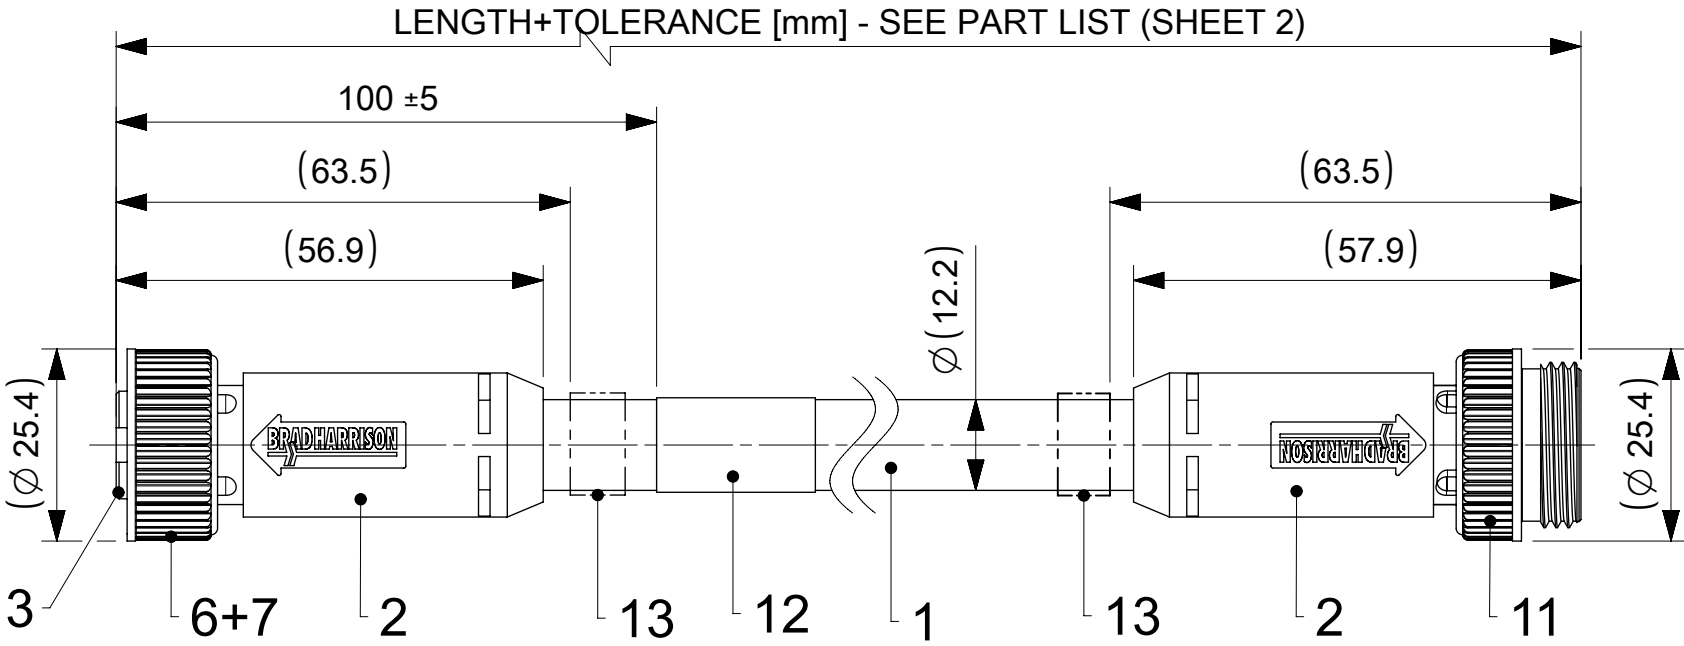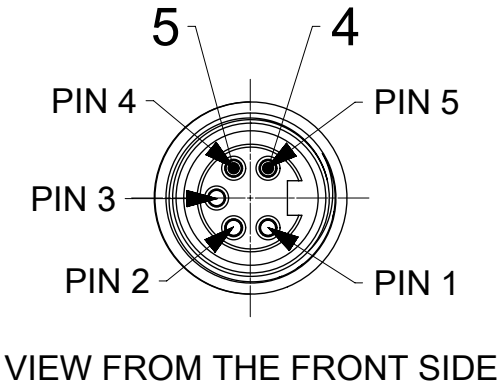

BILL OF MATERIALS

13	2	ID CARRIER	PVC	-
12	1	LABEL WRAP	VINYL	YELLOW
11	1	COUPLING NUT A-SIZE EXT.	ZINC	BLACK
10	2	PIN CONTACT 16 AWG	COPPER	GOLD OVER Ni-PLATED
9	3	PIN CONTACT 18 AWG	COPPER	GOLD OVER Ni-PLATED
8	1	HOUSING A-SIZE 5P MALE	ARNITEL	BLACK
7	1	FRICTION RING A-SIZE	NYLON	GRAY
6	1	MC COUPLING NUT A-SIZE	ZINC	BLACK
5	2	MC SOCKET SLEEVE ASSY 16 AWG	COPPER	GOLD OVER Ni-PLATED
4	3	MC SOCKET SLEEVE ASSY 18 AWG	COPPER	GOLD OVER Ni-PLATED
3	1	HOUSING A-SIZE 5P FEMALE	ARNITEL	BLACK
2	-	MOULDING MATERIAL	ARNITEL	BLACK
1	-	TRUNK CABLE 19X30 AWG OD=12	PVC	GRAY
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH/COLOR
DOCUMENT STATUS	P1	RELEASE DATE	2022/02/15	09:19:21

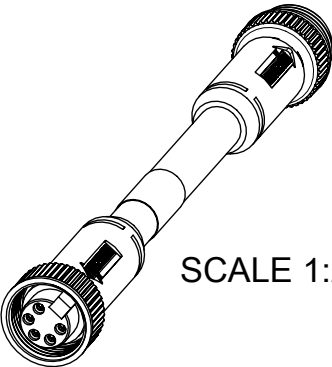

FUNCTIONAL SYMBOLS
FA= 0
FE= 0
FV= 0

DIVISIONAL SYMBOLS

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS
mm

SCALE
1:1

CURRENT REV DESC: PIN'S ADDED,NOTES UPDATED

EC NO: 695738
DRWN: RSCHIEBER
CHK'D: RSILLER
APPR: RSILLER

2022/02/14
2022/02/15
2022/02/15

INITIAL REVISION:
DRWN: MKOWALCZYK01
APPR: MMATLA

2018/09/07
2018/09/11

THIRD ANGLE PROJECTION

DRAWING
A3-SIZE

SERIES
130025

DOCUMENT NUMBER
1300250051

DOC TYPE
PSD

DOC PART
000

REVISION
B1

MATERIAL NUMBER
SEE SHEET 2

CUSTOMER
GENERAL MARKET

SHEET NUMBER
1 OF 2

molex

CSE MC 5P FE STR PVC MA STR 25M DE

PRODUCT CUSTOMER DRAWING

