


APPROVED: _____


DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/24/20	
A		UPDATE DRAWING	6/25/21	JJ/RC







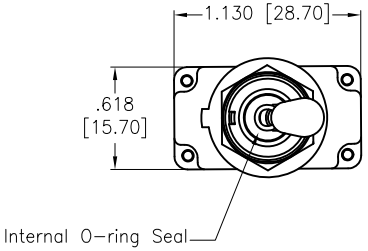




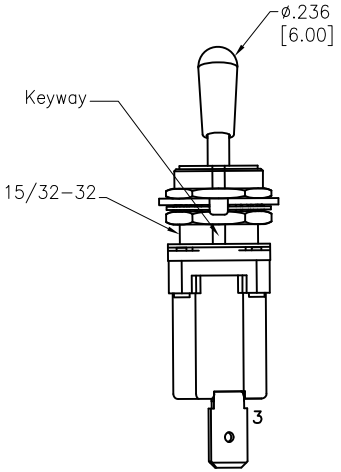

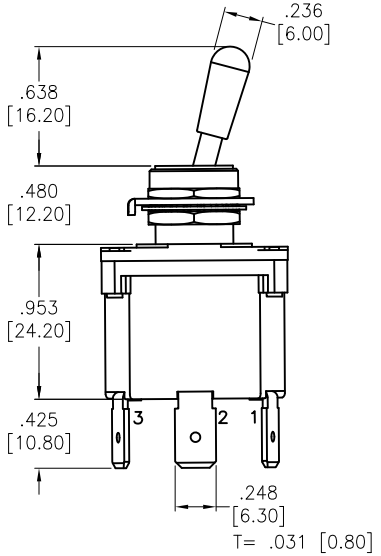

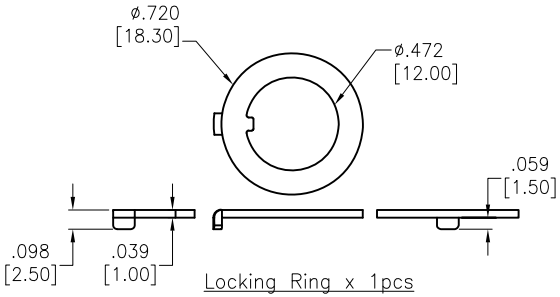

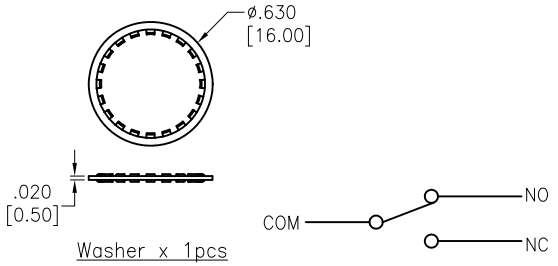

SPECIFICATIONS:
Material:
Movable contact: Copper Alloy, Silver plated
Terminals: Brass, Tin plated
Electrical:
Rating: 12A @ 250VAC/125VAC
1/2 HP 125VAC/ 1HP 250VAC/5A 125VAC
Contact resistance: 20 mohms max initial
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1500V RMS @ sea level
Electrical life: 30,000 make and break cycles at full load
Temperature Rating:
Operating temperature: -30°C to +85°C
Environmental:
IP68 Protection Class
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	OW	12/24/20
CHECKED	AC	12/24/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: POWER TOGGLE SWITCH, SPDT, ON-ON, QC .250 [6.35MM]

SIZE	PART NO.	REV.
X	SW-T4-2B-E-TA1-01	A

REF:	SCALE:	SHEET
S00198T	NTS	1 OF 1