


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/18/10	
A		ECN	12/8/10	
B		REVISED DIM.	2/17/14	AY/MY
C		REVISED SPEC.	2/24/20	AY/KL

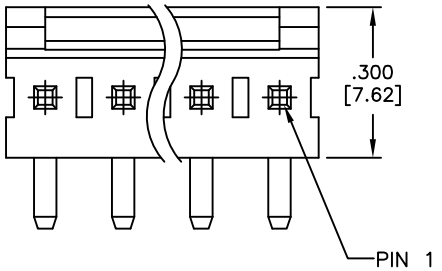

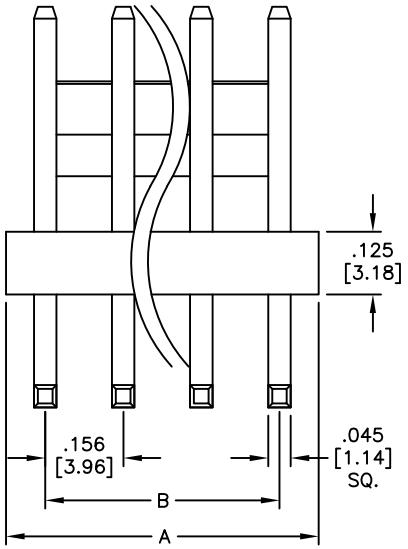

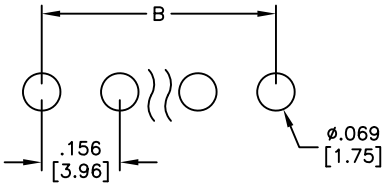

RECOMMENDED PCB LAYOUT

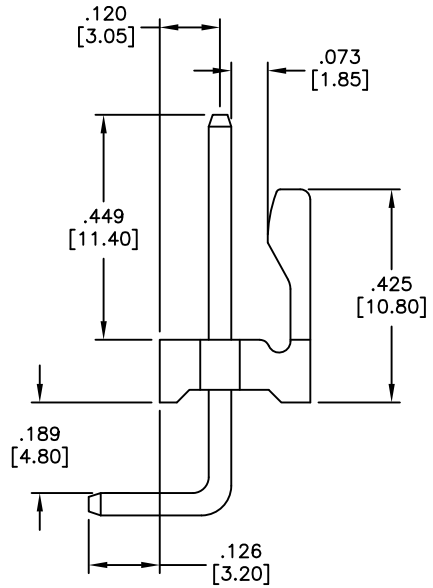

Positions: 2 thru 20
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Ny66, rated UL 94V-0
Insulator color: White
contact: Brass
Plating:
Tin over Nickel underplate overall
Electrical:
Current rating: 7.0 Amp
Contact Resistance: 20 mohms max.
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,000 VAC/DC
Temperature Rating:
Operating temperature: -40°C to +105°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	6/18/10
CHECKED		
APPROVED		

ADAM TECH
INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.156 [3.96] HEADER, RIGHT ANGLE

SIZE	PART NO.	REV.
X	LHD-XX-TRA-V0	C

REF: S00019C | SCALE: NTS | SHEET 1 OF 1