
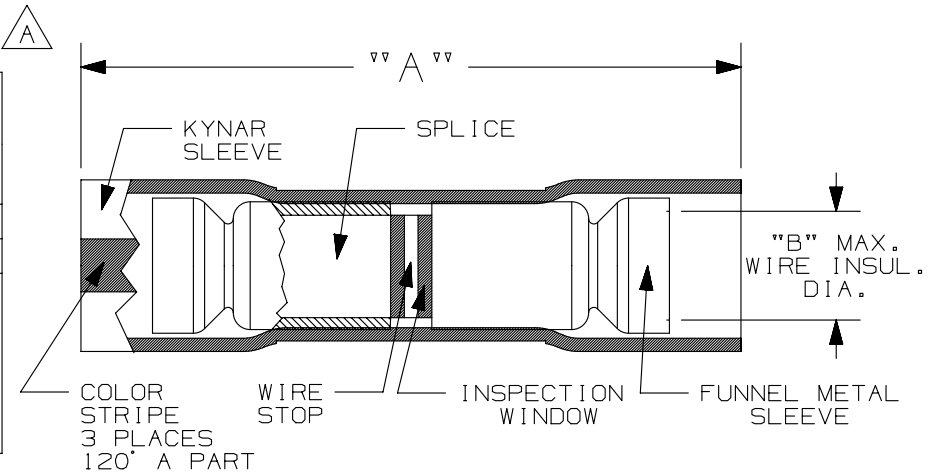




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE	COLOR CODE	DIMENSIONS in.[mm]		INSTALLATION TOOL
			A ±.03 [0,8]	B	
BSK18	22-18	RED	1.12 [28,45]	.136 [3,45]	CT-400
BSK14	16-14	BLUE	1.12 [28,45]	.162 [4,11]	CT-400, CT-460
BSK10  LISTED 587H E52164	12-10	YELLOW	1.24 [31,50]	.225 [5,72]	CT-460



NOTE:

- BSK10: cULus LISTED FOR US AND CANADA  
 A. 600V MAX. VOLTAGE RATING  
 B. 302°F (150°C) MAX. TEMP. RATING  
 C. SOLID, STRANDED, AND INTERNAL (CLASS K) COPPER WIRE
- MATERIAL:  
 A. STAMPING (22-18 & 16-14) - .03" THK COPPER, TIN PLATED  
 B. STAMPING (12-10) - .04" THK COPPER, TIN PLATED  
 C. METAL SLEEVES- BRASS, TIN PLATED  
 D. HOUSING- KYNAR
- DIMENSIONS IN BRACKETS ARE MILLIMETERS
- WIRE STRIP LENGTH: 3/8 <sup>+1/32-0</sup> (9.5 <sup>+.8-0</sup>)
- PACKAGE QUANTITY:  
 SEE [www.panduit.com](http://www.panduit.com)  
 FOR PART NUMBER SUFFIX DESIGNATION  
 FOR PACK SIZE
- KYNAR IS A REGISTERED TRADEMARK OF ARKEMA.

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE					
							<b>KYNAR BUTT SPLICES</b> <b>BSK18,BSK14,BSK10</b> CUSTOMER DRAWING					
							ITEM REVISION NAME N41754BA/00					
							DATASET FILE NAME N41754BA_DC/00D					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					
							.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °		MATERIAL:  SEE NOTE			
							 THIRD ANGLE PROJECTION					
							DRAWING NUMBER: A41754		DRAWING NUMBER: A41754			
							DRAWN BY JAHA	DATE 03-01-12	CHK LSM	SCALE NONE	SHT 1 OF 1	SIZE A

D10100DA/12