
DESCRIPTION: M12 8 POSITION STAINLESS STEEL FEMALE PIGTAIL

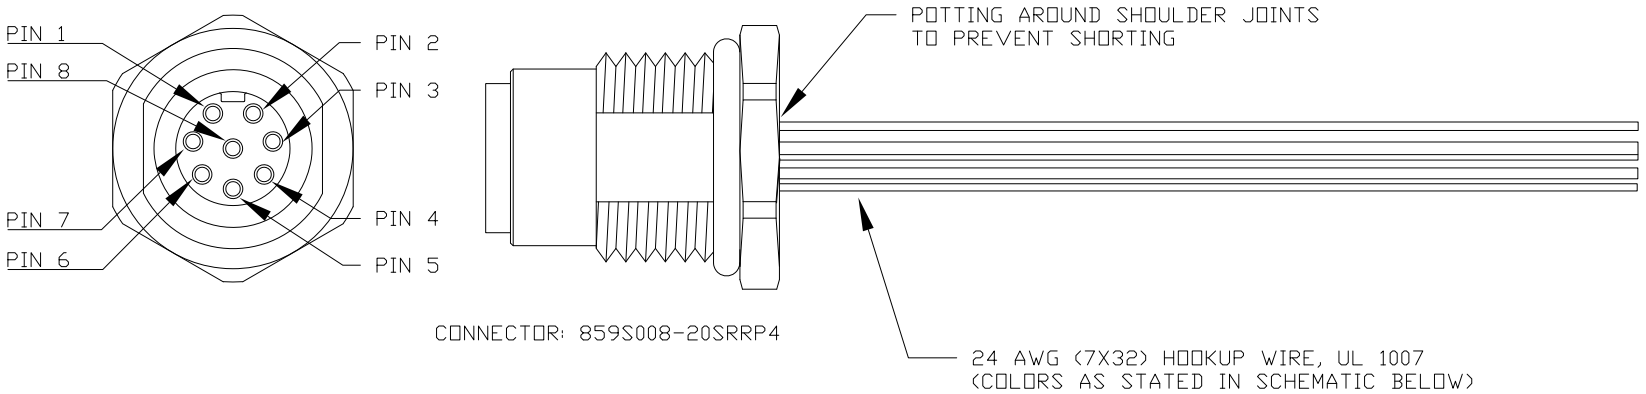

**SEE PAGE 2 FOR DETAILS

WIRING SCHEMATIC

PIN
1 = WHITE
2 = BROWN
3 = GREEN
4 = YELLOW
5 = GREY
6 = PINK
7 = BLUE
8 = RED

FPM12A08IYYBR03

INCHES — LENGTH
EX: 06 = 6 INCHES
12 = 12 INCHES

NOTE: PACKAGED 10 PER BAG

RoHS COMPLIANT

UNITS IN INCHES [MM] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.


DRAWN:	DATE:
G. BROWN	01/23/2019

NorComp


SCALE:	SHEET	OF	REV
NTS	1	2	2

DWG NO. FPM12A08IYYBR03

DESCRIPTION: M12 8 POSITION STAINLESS STEEL FEMALE PIGTAIL

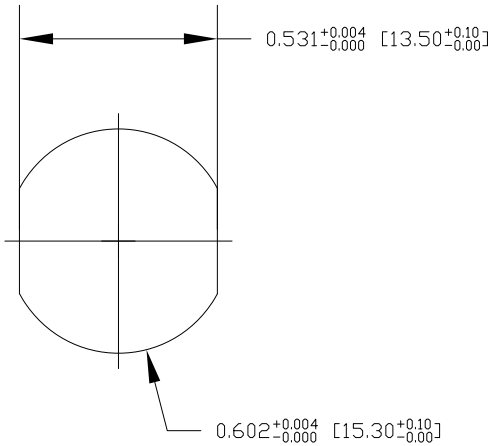


RECOMMENDED PANEL CUT-OUT

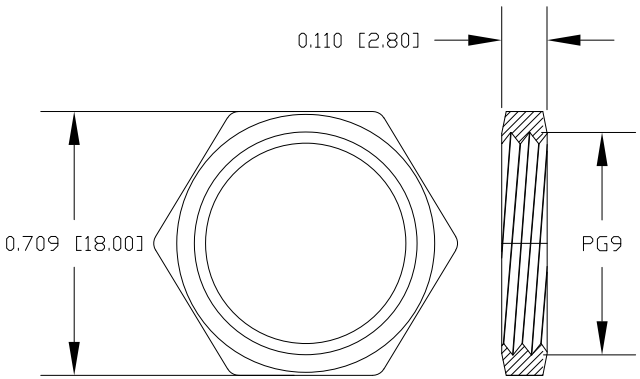


NUT

NOTE:

MATERIAL	
HOUSING:	PBT UL94V-0, BLACK
CONTACT:	BRASS
NUT:	STAINLESS STEEL 316
SHELL:	STAINLESS STEEL 316
O-RING:	EPDM, BLACK
FINISH	
CONTACT:	GOLD PLATED 10μ" Min.
UNDER PLATE:	NICKEL
ELECTRICAL	
RATED CURRENT:	2A
RATED VOLTAGE:	30V
INSULATION RESISTANCE:	100MΩ MIN
CONTACT RESISTANCE:	10mΩ MAX
WATER PROOF:	IP67/68
ENVIRONMENT	
OPERATION TEMPERATURE:	-40°C ~ +85°C

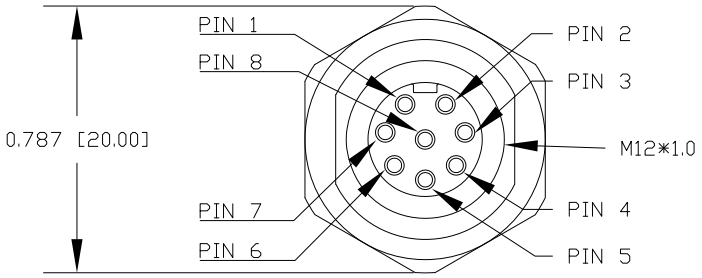

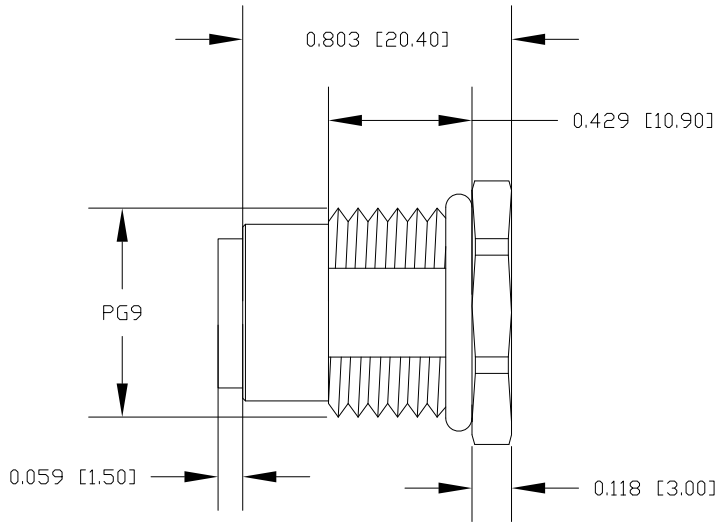

RoHS COMPLIANT

UNITS IN INCHES [MM] DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: G. BROWN	NorComp	SCALE: NTS	SHEET 2 OF 2	REV 2
DATE: 01/23/2019		DWG NO. FPM12A08IYYBR03		