

APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/6/20	
A		UPDATE DIM.	7/30/20	LH/TL

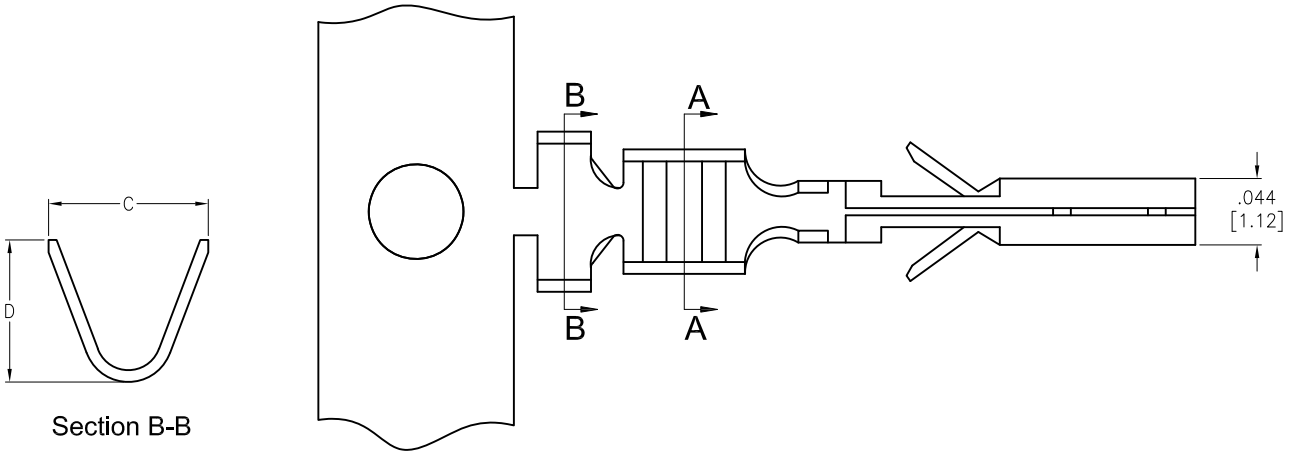

Section B-B



Section A-A

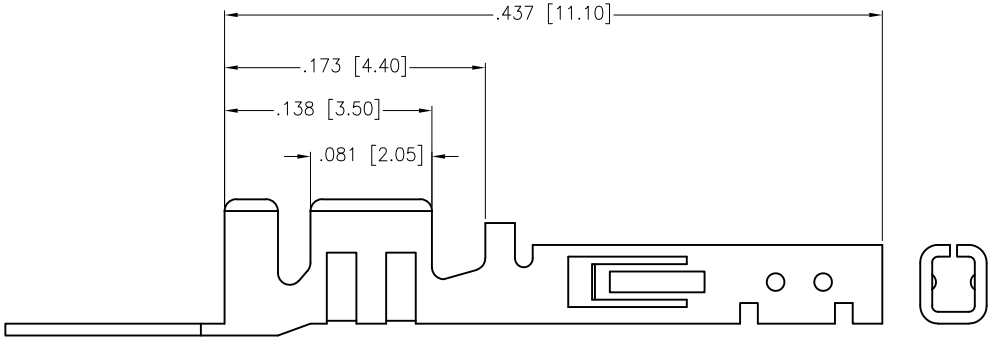

P/N	Wire size	Dim. A	Dim. B	Dim. C	Dim. D
DMT-A5-C-F-T-R	#26~#30AWG	.071 [1.80]	.063 [1.60]	.094 [2.40]	.075 [1.90]
DMT-B5-C-F-T-R	#20~#24AWG	.083 [2.10]	.083 [2.10]	.106 [2.70]	.098 [2.50]

SPECIFICATIONS:

Material:

Contact: Phosphor Bronze, Tin Plated

Thickness: 0.2mm

Electrical:

Voltage rating: 250 V AC/DC

Current rating: 20 Awg: 5 Amps max
22 Awg: 5 Amps max
24 Awg: 4 Amps max
26 Awg: 3 Amps max
28 Awg: 2 Amps max
30 Awg: 1 Amp max

Contact resistance: 10 mohms max.

Dielectric withstanding voltage: 1500 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	LH	3/6/20
CHECKED	AY1	3/6/20
APPROVED		

ADAM TECH INTERCONNECTS
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: .118" [3.0mm] CRIMP TERMINAL, TIN PLATED, ON REEL

SIZE	PART NO.	REV.
X	DMT-X5-C-F-T-R	A

REF: S00015T | SCALE: NTS | SHEET 1 OF 1